

Smart-UPS

APC Smart-UPS 750VA USB & Serial 230V



APC Smart-UPS, 500 Watts / 750
VA, Input 230V / Output 230V, Interface Port
DB-9 RS-232, USB, SmartSlot

Includes: CD with software, Smart UPS
signalling RS-232 cable, USB cable, User
Manual

Standard Lead Time: Usually in Stock



SUA750I Features

USB Connectivity	Provides management of the UPS via a USB port (not available on all models).
Battery replacement without tools	Allows quick, easy battery replacement.
Front-access servicing	Simplifies installation and maintenance while minimizing space requirements.

Smart-UPS Features & Benefits

Availability

Boost and Trim Automatic Voltage Regulation (AVR)	Gives higher application availability by correcting low and high voltage conditions without using the battery.
Intelligent Battery Management	Maximizes battery performance, life, and reliability through intelligent, precision charging.
Power conditioning	Protects connected loads from surges, spikes, lightning, and other power disturbances.
Temperature-compensated battery charging	Prolongs battery life by regulating the charge voltage according to battery temperature.
Automatic restart of loads after UPS shutdown	Automatically starts up the connected equipment upon the return of utility power.
Automatic self-test	Periodic battery self-test ensures early detection of a battery that needs to be replaced.
Cold-start capable	Provides temporary battery power when the utility power is out.
Disconnected battery notification	Warns when a battery is not available to provide backup power.
Generator Compatible	Ensures clean, uninterrupted power to protected equipment when generator power is used.

Manageability

Network manageable	Provides remote management of the UPS over the network.
SmartSlot	Customize UPS capabilities with management cards.
Audible Alarms	Actively let you know if the unit is on battery, if the battery is low or if there is an overload condition.
LED status indicators	Quickly understand unit and power status with visual indicators.
Serial Connectivity	Provides management of the UPS via a serial port.
USB Connectivity	Provides management of the UPS via a USB port (not available on all models).
Disconnected battery notification	Warns when a battery is not available to provide backup power.
InfraStruXure Manager Compatible	Enables centralized management via the APC InfraStruXure® Manager.

Serviceability

User-replaceable batteries	Increases availability by allowing a trained user to perform upgrades and replacements of the batteries reducing Mean Time to Repair (MTTR)
Hot-swappable batteries	Ensures clean, uninterrupted power to protected equipment while batteries are being replaced
Predictive failure notification	Provides early-warning fault analysis ensuring proactive component replacement.
Resettable circuit breakers	Enables a quick recovery from overload events.


Adaptability

Adjustable voltage-transfer points	Maximizes useful battery life by widening the input voltage window or tightening the output voltage regulation.
Adjustable voltage sensitivity	Provides the ability to adapt the UPS for optimal performance in specific power environments or generator applications.
Field-replaceable power distribution panel	Ensures compatibility with equipment that has different plug types.

Safety

Safety-agency approved	Ensures the product has been tested and approved to work safely with the connected service provider equipment and within the specified environment. UL, FCC, CE, C-Tick approvals.
------------------------	--

Output

Output Power Capacity	500 Watts / 750 VA
Max Configurable Power	500 Watts / 750 VA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal,57 - 63 Hz for 60 Hz nominal
Crest Factor	up to 5 : 1
Waveform Type	Sine wave
Output Connections	(6) IEC 320 C13 
	(1) IEC Jumpers


Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320-C14 inlet
Input voltage range for main operations	160 - 285V
Input voltage adjustable range for mains operation	151 - 302V

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	3 hour(s)
Replacement Battery	RBC48
RBC™ Quantity	1
Typical Backup Time at Half Load	16.4 minutes (250 Watts)
Typical Backup Time at Full Load	4.8 minutes (500 Watts)
Runtime Chart	Smart-UPS

Energy Use/Efficiency

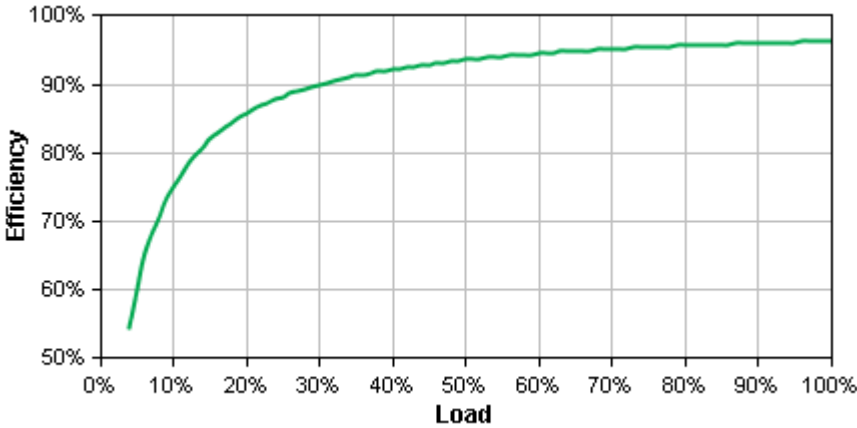

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and resistive load output.

[View Enlarged Chart](#)

Communications & Management

Interface Port(s)	DB-9 RS-232,USB,SmartSlot
Available SmartSlot™ Interface Quantity	1
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : and Overload Indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays
Emergency Power Off (EPO)	Optional

Surge Protection and Filtering

Surge energy rating	340 Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	157.00 mm
Maximum Width	137.00 mm
Maximum Depth	358.00 mm
Net Weight	13.18 KG
Shipping Weight	14.55 KG
Shipping Height	290.00 mm
Shipping Width	270.00 mm

Shipping Depth	500.00 mm
Color	Black
Units per Pallet	40.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	55.00 dBA
Online Thermal Dissipation	90.00 BTU/hr

Conformance

Regulatory Approvals	C-tick,CE,EN 50091-1,EN 50091-2,EN 55022 Class A,GOST,IEC 60950,VDE
Standard Warranty	2 years repair or replace
ROHS/WEEE Compliance	RoHS 7b Exemption

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.