

DEVICE SPECIFICATION FOR PYROELECTRIC IR-DETECTOR

CUSTOMER :
TYPE : PYQ 1398
PART-NO. : Engineering samples
No. of samples :

Four element detector, serial opposed format, on ceramic base.

This specification is provided by

PerkinElmer Optoelectronics GmbH & Co. KG, Wiesbaden.

It covers the complete technical data of a pyroelectric IR detector. In case of samples attached to this paper, these have been taken randomly from normal production output. All detectors have met the requirements of PerkinElmer test-specifications and passed outgoing inspection.

We kindly ask for approval with the return of a signed copy.

Checked:

Date: 14.09.06

Customer approval:

Date:

Electrical Configuration:

Two pairs of sensing elements are connected to built-in FET in source follower circuit, connections "Drain-Source-Ground". It is recommended to use a load resistor of 47 kΩ.

Electrical data:

Unless specified differently, all data refer to 25°C:

Responsivity: **min.: 5,4 kV/W** **typ.: 6,5 kV/W**

Responsivity is measured within spectral range 7 - 14 μm as per fig. 3 at 1Hz.

Match: **max.: 15 %**

Electrical balance (match) is measured with same test set up as responsivity, both elements exposed to radiation. A percent value is calculated as

$$\frac{100 \times S_m}{s} \quad s_m : \text{signal (match)}$$
$$s : \text{signal of left or right element.}$$

Noise: **max.: 100 μV_{pp}** **typ.: 40 μV_{pp}**

After a 10 minute settling time, noise is monitored for the duration of 1500 sec. at a temperature of 25°C, shut from infrared energy, electrical bandwidth of 0.4 to 10Hz.

Operating voltage: $V_{DD} = 2-12 \text{ V}$

Source voltage: $V_S = 0.2-1.55 \text{ V}$

Drain-source voltage: $V_{DS} = \text{min } 0.5 \text{ V}$




Fig.1: Test circuit

Typical Responsivity vs. Frequency

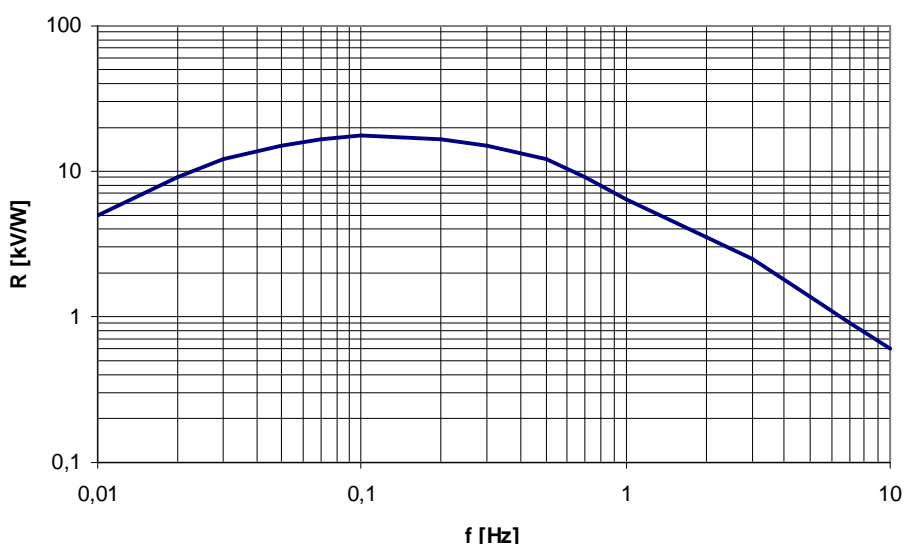


Fig.2: Frequency response

Sample data

The samples attached to this specification have been tested. Test equipment as per fig. 3 and fig.4.

Tab.1: Sample data

Sample no.	R _A [kV/W]	R _B [kV/W]	R _C [kV/W]	R _D [kV/W]	Match [kV/W]	Offset [V]
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

Test Set up

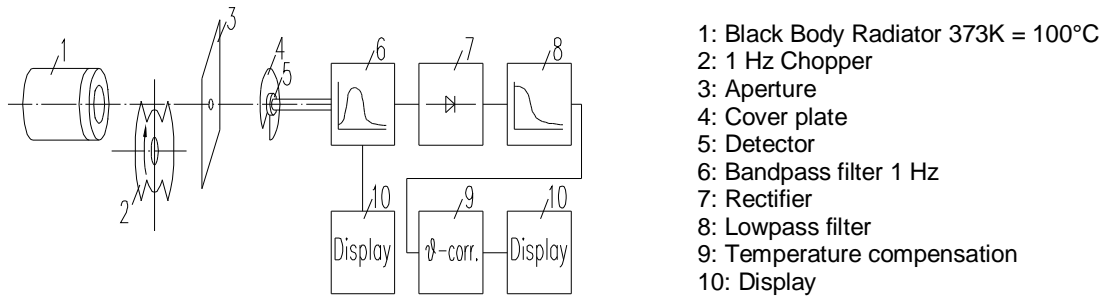


Fig.3: Test Set – up

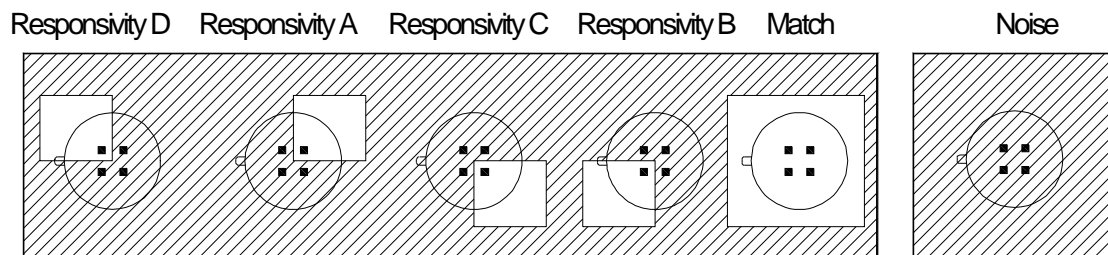


Fig.4.: Responsivity measurement

Spectral range:

The spectral range of the detector is determined by filter built in (window).

- Substrate:** Silicon, multilayer coated
- Cut – on:** 5.5 ± 0.3 μm
- Transmission:** T > 77% average between 7 μm and 14 μm
- Blocking:** T < 0.1% for λ < 5 μm

Configuration:

Housing: TO- 5 metal housing with infrared transparent window
Element size: 1 x 1 mm², spacing 1 mm, see also drawing: 2/71452
Connections: Refer to drawing: 2/71452

Field of View




Fig.5: Field of View

Operating temperature: -40°C to +85°C

The electrical parameters may vary from specified values accordance with their temperature dependence.

Storage temperature: -40°C to +85°C

Avoid storage under high humid environment.

Microphonic noise: max: 30 μV_{rms} /g

PerkinElmer IR-detectors covered herein have passed qualification test for microphonic noise in x-y-z axis, exciting frequencies from 5Hz to 2kHz.

Humidity:

The IR-detector shall not increase noise or decrease responsivity when exposed to 95% r.H. at 30°C. Operation below dew point might affect performance.

Hermetic seal:

This IR-detector is sealed to pass a He-leakage test with maximum leak rate of 10^{-8} mbar.l's⁻¹.

Quality:

PerkinElmer is a **QS 9000** certified manufacturer with established SPC and TQM. Detector out-going inspections include the parameters Responsivity, Match, Offset, Noise, Gross leak (Mil Std 883 method 1014C1) on 100%. Individual data are not stored, statistical details can be disclosed on request.

Handling:


Electrostatic charges may destroy the detector. We recommend applying precautions necessary for ESD devices to avoid damages. Do not apply physical force to detector leads. Do not expose detector to aggressive detergents such as Freon, trichloroethylene, etc.


Solder conditions:

Hand soldering and standard wave soldering process may be applied. Avoid heat exposure to the top and the window of the detector. Reflow soldering is not recommended.

The reproduction, transmission or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration or a utility model or design are reserved.

Weitergabe sowie Verwertfigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrucklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fur den Fall der Patentierung oder GM-Entragung.

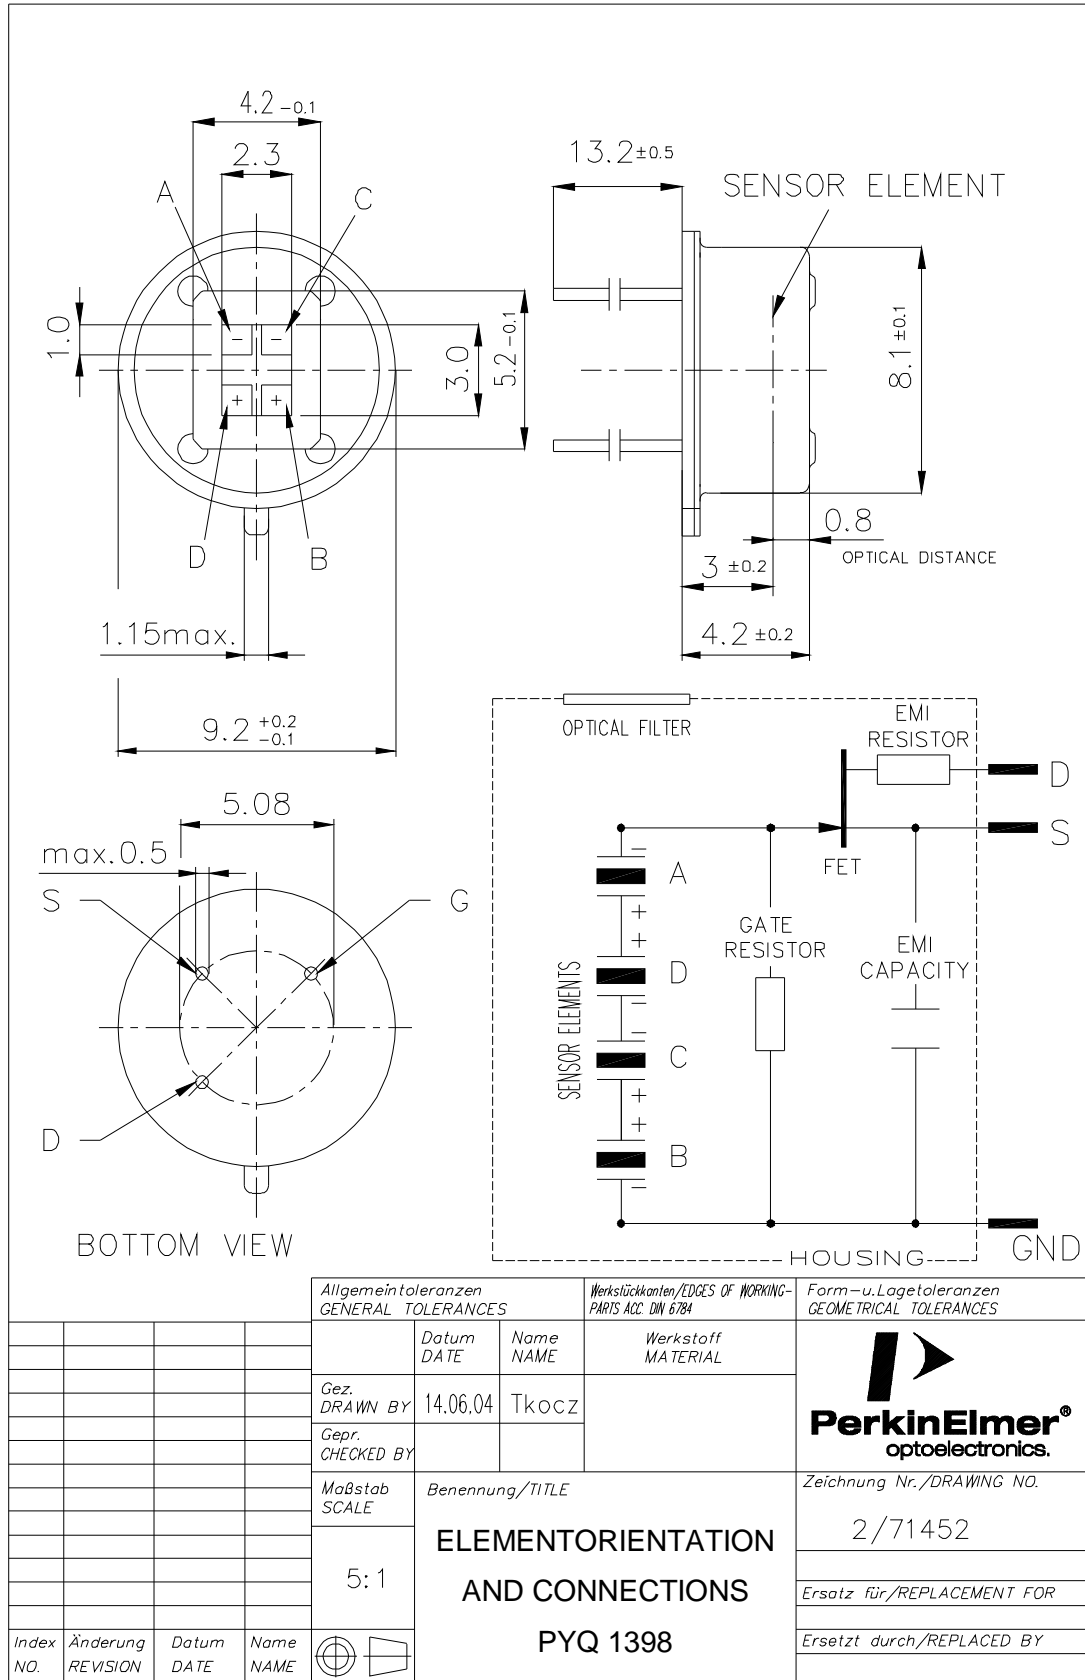

Allgemeintoleranzen GENERAL TOLERANCES				Werkstuckkanten/EDGES OF WORKING-PARTS ACC. DIN 6784		Form- u. Lagetoleranzen GEOMETRICAL TOLERANCES	
	Datum DATE	Name NAME		Werkstoff MATERIAL		 Zeichnung Nr./DRAWING NO. 2/71452 Ersatz fur/REPLACEMENT FOR Ersetzt durch/REPLACED BY	
	Gez. DRAWN BY	14.06.04	Tkocz				
	Gepr. CHECKED BY						
	Mastab SCALE	Benennung/TITLE					
			5:1	ELEMENTORIENTATION AND CONNECTIONS PYQ 1398			
Index NO.	nderung REVISION	Datum DATE	Name NAME				

A4.dwg