
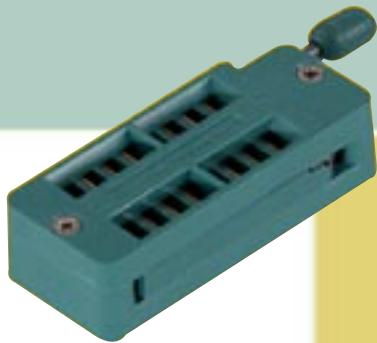


3M™ Textool™ DIP Sockets

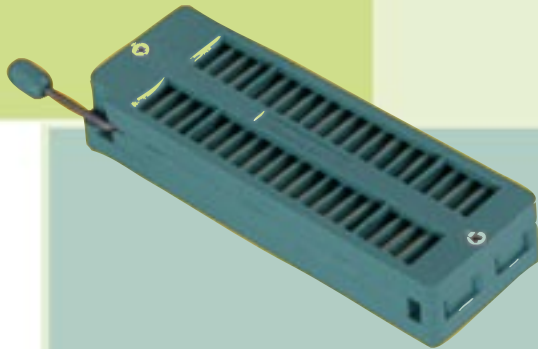

Universal DIP Sockets .100" (2.54 mm)

- For DIPs with .100" (2.54 mm) lead spacing
- Extra-wide contact zone allows insertion of any DIP package with distance between rows from .300" (7.62 mm) through .600" (15.24 mm)
- Lever actuated zero insertion force mechanism
- Socket contact point of .090" (2.29 mm) below top surface of socket

Socket Part Number	Contact Quantity	Mating Receptacle Part Number
224-1286-00-0602J	24	224-1275-XX-0602J
224-1371-00-0602J	28	224-1277-XX-0602J
224-1287-00-0602J	32	224-1285-XX-0602J
224-1288-00-0602J	40	224-1280-XX-0602J
224-1289-00-0602J	42	224-1281-XX-0602J

Contact Tail Length/Mounting Flanges:

- XX = 09 Solder Tail .13 [3.3] w/flanges
- = 19 Wire Wrap Tail .62 [15.8] w/flanges
- = 29 Solder Tail .13 [3.3] w/out flanges
- = 39 Wire Wrap Tail .62 [15.8] w/out flanges

DIP Sockets .070" (1.78 mm)

- For DIPs with .070" (1.78 mm) lead spacing
- Pin counts from 28 through 90 leads
- Lever actuated zero insertion force mechanism
- Socket contact point of .090" (2.29 mm) below top surface of socket

Socket Part Number	Contact Quantity	Mating Receptacle Part Number
228-1290-00-0602J	28	228-1290-XX-0602J
232-1291-00-0602J	32	NOT AVAILABLE
242-1293-00-0602J	42	242-1293-XX-0602J
256-1292-00-0602J	56	NOT AVAILABLE
264-1300-00-0602J	64	264-1300-XX-0602J
290-1294-00-3302J	90	290-1294-XX-0602J

Contact Tail Length/Mounting Flanges:

- XX = 09 Solder Tail w/flanges
- = 29 Solder Tail w/flanges