
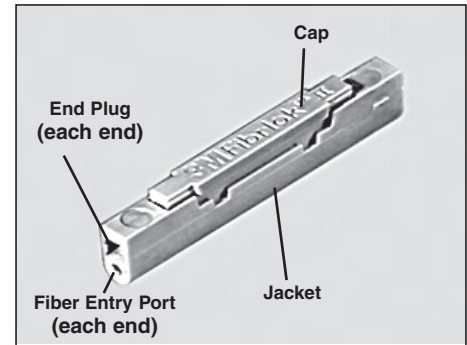


## 1.0 General

1.1 The 3M™ Fibrlok™ II Universal Optical Fiber Splice 2529 provides permanent mechanical splices for single- or multimode fiber having 125 μm diameter cladding. The 2529 universal splice is designed to accommodate any combination of fibers with coating diameters from 250 μm to 900 μm.

1.2 All 2529 splices are gray in color and are marked with the 3M Fibrlok™ II logo on the splice cap.

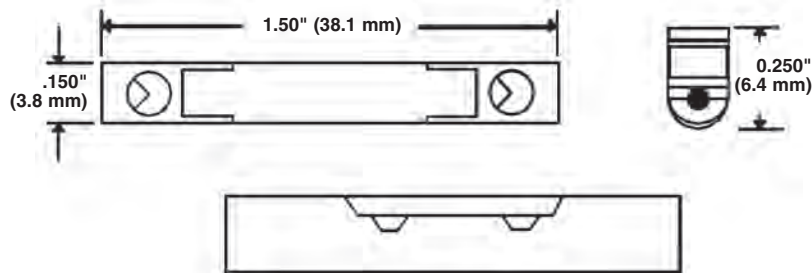

1.3 3M™ Fibrlok™ Assembly Tool 2501

