

## 0-72V/0-1.2A Single Output Programmable DC Power Supply Model 9124



The 9124 is a laboratory grade, 0-72V/0-1.2A programmable DC Power Supply providing great performance and features not found in other supplies in this price category. The power supply was designed to meet the needs of today's applications in R&D design verification, production testing or university labs that require clean and reliable power, high resolution/accuracy and fast transient response time.

- Excellent display resolution
- Fast transient response time ( $< 150 \mu\text{s}$ )
- SCPI compatible
- Communicate via RS232 or GPIB interface, using the included RS232 to TTL or GPIB to TTL Serial Converter cable. USB communication is optional and requires a USB to TTL Serial Converter cable (order IT-E132)
- Closed case calibration
- Compact size for bench use or rack mountable (2U x 1/2U size)
- DVM and Milliohm Meter
- Discrete Fault Indicator/Remote Inhibit (DFI/RI). Useful for turning multiple power supplies On/Off simultaneously
- Application Software for front panel emulation and simple test sequence generation included
- Sheathed banana plug terminals for safety

## Data sheet

# Single Output Programmable DC Power Supplies

## Models 9120A, 9121A, 9122A, 9123A & 9124

B+K Precision® models 9120A, 9121A, 9122A, 9123A and 9124 are laboratory grade Programmable DC Power Supplies providing great performance and features not found in other supplies in this price category. The 9120 series are designed to meet the needs of today's applications in R&D design verification, production testing or university labs that require clean and reliable power, high resolution and accuracy and fast transient response time.

- Excellent display resolution
- Low ripple and low noise
- Outstanding temperature stability
- Fast transient response time (< 150  $\mu$ s)
- SCPI compatible
- Front and Rear Output Terminals
- Closed case calibration
- Compact size for bench use or rack mountable (2U x 1/2U size)
- List mode operation for increased throughput. Download and execute command sequences from non-volatile memory

### Front Panel Operation


The numeric keys and rotary knob provide a convenient interface for setting output levels quickly and precisely. Voltage and Current can be set to a maximum resolution of 0.5mV (2mV for 9124) and 0.1mA respectively. Up to 50 parameters can be stored and recalled from internal memory.



9124

### Selection Chart

|                | models |       |        |       |        |
|----------------|--------|-------|--------|-------|--------|
|                | 9120A  | 9121A | 9122A  | 9123A | 9124   |
| Output Voltage | 0-32V  | 0-20V | 0-60V  | 0-30V | 0-72V  |
| Output Current | 0-3A   | 0-5A  | 0-2.5A | 0-5A  | 0-1.2A |

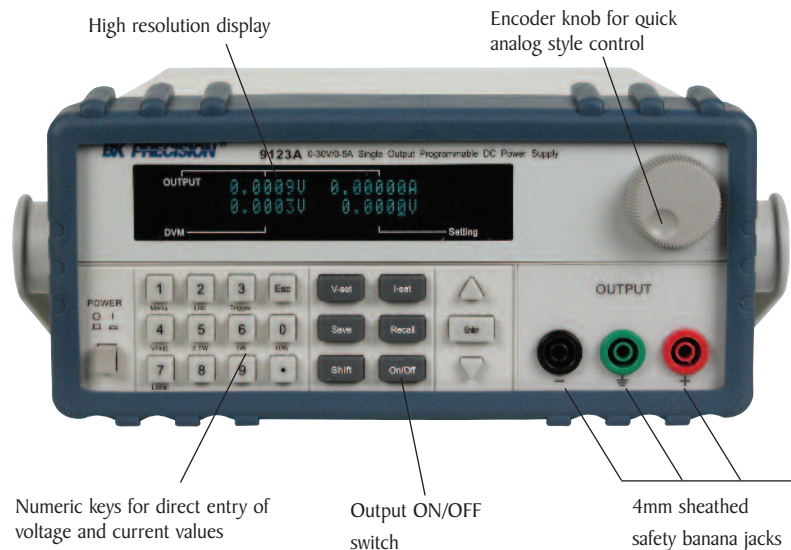

**Single Output Programmable DC Power Supplies**  
**Models 9120A, 9121A, 9122A, 9123A & 9124**

**Remote Interface**

The power supplies can be remotely controlled from any PC with USB or RS232 interface, allowing the user to program and monitor all parameters through easy to use SCPI commands. The power supplies come with a RS232 to TTL serial converter cable. A USB to serial converter cable is available as option. Additionally, model 9123A can be controlled via GPIB interface and includes a GPIB to TTL conversion adapter cable.

**Extra Features**

The 9120 series' digital port offers a variety of configurations. The port can operate in Digital I/O, external Trigger and DFI/RI (Discrete Fault Indicator/Remote Inhibit) mode. The RI feature can be used for turning several power supplies On/Off simultaneously. External triggering can be used in combination with List mode.

The included Application Software supports front panel emulation and allows users to generate simple test sequences without the need to write source code.

Additionally, the power supply comes with a built-in 5 1/2 digit DVM and high resolution milliohm meter supporting 4 wire measurements.

**Specifications**

|  | models  |                                  |                                  |                                  |                                  |
|--|---|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
|  | 9120A   | 9121A                            | 9122A                            | 9123A                            | 9124                             |
| Output Ratings (0 °C~40 °C)  | 0 ~32V<br>0~3A  | 0 ~20V<br>0~5A                   | 0 ~60V<br>0~2.5A                 | 0 ~30V<br>0~5A                   | 0~72V<br>0~1.2A                  |
| Load Regulation<br>±(%of output+offset)                                  | <0.01%+2mV<br><0.05%+1mA  |                                  | <0.01%+2mV<br><0.05%+0.5mA       | <0.01%+2mV<br><0.05%+1.5mA       | <0.01%+2mV<br><0.05%+0.3mA       |
| Line Regulation<br>±(%of output+offset)                                  | <0.01%+1mV<br><0.05%+0.1mA  |                                  | <0.01%+2mV<br>≤0.05%+0.05mA      | <0.01%+1mV<br>≤0.05%+0.1mA       | <0.01%+1mV<br>≤0.05%+0.05mA      |
| Programming resolution   | 0.1mV<br>0.1mA  |                                  | 0.5mV<br>0.1mA                   | 0.1mV<br>0.1mA                   | 0.1mV<br>0.05mA                  |
| Readback/ Meter resolution   | 0.1mV<br>0.01mA   | 0.1mV<br>0.05mA                  | 0.5mV<br>0.05mA                  | 0.1mV<br>0.05mA                  | 0.5mV<br>0.01mA                  |
| Front panel setting resolution   | 0.5mV<br>0.1mA  |                                  | 0.1mV<br>0.1mA                   | 0.5mV<br>0.1mA                   | 2mV<br>0.1mA                     |
| Programming accuracy, 12months (25 °C ± 5 °C)<br>±(%of output+offset)    | <0.03%+3mV<br><0.05%+2mA  |                                  | ≤0.03%+6mV<br>≤0.05%+1.5mA       | ≤0.03%+3mV<br>≤0.05%+2.5mA       | ≤0.03%+6mV<br>≤0.05%+1mA         |
| Readback/ Meter accuracy 12months (25 °C ± 5 °C)<br>±(%of output+offset) | <0.02%+3mV<br><0.05%+2mA  |                                  | ≤0.02%+6mV<br>≤0.05%+1.5mA       | ≤0.02%+2.5mV<br>≤0.05%+2.5mA     | ≤0.02%+5mV<br>≤0.05%+1mA         |
| Ripple & Noise (20Hz ~20MHz)   | ≤ 4mVp-p<br>≤ 3mA <sub>rms</sub>  | ≤ 3mVp-p<br>≤ 3mA <sub>rms</sub> | ≤ 5mVp-p<br>≤ 3mA <sub>rms</sub> | ≤ 4mVp-p<br>≤ 4mA <sub>rms</sub> | ≤ 5mVp-p<br>≤ 3mA <sub>rms</sub> |
| Temperature coefficient, (0 °C~40 °C)<br>±(% of output+offset)           | <0.02%+3mV<br><0.05%+2mA  |                                  | ≤0.02%+6mV<br><0.05%+1mA         | ≤0.02%+3mV<br><0.05%+2mA         | ≤0.02%+5mV<br><0.05%+0.5mA       |
| Readback temperature coefficient,<br>±(% of output+offset)               | <0.02%+3mV<br><0.05%+2mA  |                                  | ≤0.02%+6mV<br>≤0.05%+1mA         | ≤0.02%+3mV<br>≤0.05%+2mA         | ≤0.02%+5mV<br>≤0.05%+0.5mA       |
| Transient Response   | < 150 μs for output to recover to within 75 mV following a change from 100 mA to 1 A                    |                                  |                                  |                                  |                                  |
| DVM Accuracy   | 0~12V range: 0.02%+2mV<br>0~40V range: 0.02%+3mV  |                                  |                                  |                                  |                                  |
| DVM Resolution   | 0~12V range: 0.1mV<br>0~40V range: 1mV  |                                  |                                  |                                  |                                  |
| Milliohm Meter Accuracy  | 0.1% (for Voltage and Current ≤ 10% of full scale)<br>0.3% (for Voltage and Current ≥ 3% of full scale) |                                  |                                  |                                  |                                  |
| State Storage Memory   | 50 user configurable memory locations   |                                  |                                  |                                  |                                  |
| Operating Temperature  | 0 to 40 °C, <75% R.H.   |                                  |                                  |                                  |                                  |
| Storage Temperature  | -20 to 70 °C, <85% R.H  |                                  |                                  |                                  |                                  |
| Power Requirements   | 115V/220VAC ± 10%, 47 to 63Hz   |                                  |                                  |                                  |                                  |
| Weight   | 19.8 lbs, (9 kg)  |                                  | 21.2 lbs, (9.6 kg)               |                                  | 19.8 lbs, (9 kg)                 |
| Dimensions   | 8.45in(W) x 3.8in(H) x 13.9in(D)<br>214.5mm(W) x 88.2mm (H) x 354.6mm (D)                               |                                  |                                  |                                  |                                  |

**One Year Warranty**


**Accessories**

Supplied: User manual, line cord, RS232 communication cable, Software Installation disk. Model 9123A also includes GPIB to TTL Serial Converter cable IT-E135  
 Optional: IT-E132 USB to TTL Serial Converter cable , IT-E151 rack mount kit.



The 9120 series uses 4mm sheathed banana jacks that accept sheathed or shrouded banana plugs and meet the latest international safety standards.

Temperature controlled cooling fan      DVM and mΩ meter      User accessible fuse

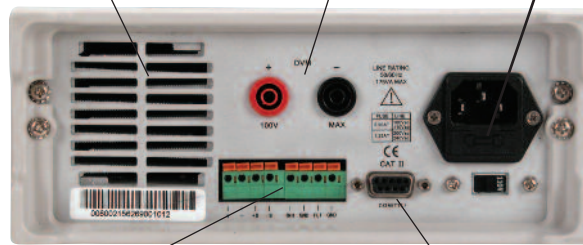

Remote Sense and digital port functionality

Serial interface connector for RS232 or USB communication. (USB communication cable is optional). Model 9123A also supports control via GPIB interface.