

# Model CLN-50/100

# Closed Loop Hall Effect

## Description

Models CLN-50 and CLN-100 are closed loop Hall effect current sensors that accurately measure DC and AC currents and provide electrical isolation between the current carrying conductor and the output of the sensor.

## Features

- Noncontact measurement of high current
- Measures DC, AC and impulse currents
- Current sensing up to 400A peak

- Very fast response and high accuracy
- High overload capacity
- PC board mount
- Solid core with aperture

## Applications

- Variable speed drives for motors
- Welding Equipment
- Power supply Equipment
- Measure and control system
- Over current protection
- Protection of power semiconductors

## Electrical Specifications

Nominal current ( $I_N$ ) .....	50 A rms	100 A rms
Measuring range .....	0 to $\pm 90$ A	0 to $\pm 150$ A
Sense resistor .....	<b>R. min.</b> <b>R. max.</b>	<b>R. min.</b> <b>R. max.</b>
with $\pm 12$ V at $\pm 70$ A peak .....	50 ohms – 90 ohms	n/a      n/a
at $\pm 100$ A peak .....	n/a      n/a	30 ohms      55 ohms
at $\pm 150$ A peak .....	n/a      n/a	10 ohms      25 ohms
with $\pm 15$ V at $\pm 90$ A peak .....	70 ohms – 100 ohms	n/a      n/a
at $\pm 100$ A peak .....	n/a      n/a	30 ohms      85 ohms
at $\pm 150$ A peak .....	n/a      n/a	30 ohms      40 ohms
Nominal analog output current .....	50 mA	100 mA
Turns ratio .....	1:1000	
Overall accuracy at 25°C and $\pm 12$ V .....	$\pm 0.9\%$ of $I_N$	
Overall accuracy at 25°C and $\pm 15$ V .....	$\pm 0.5\%$ of $I_N$	
Supply voltage (Vdc) .....	$\pm 12$ to $\pm 15$ ( $\pm 5\%$ )	
Dielectric strength .....	3 kV rms/50 Hz/1 min.	
(between the current carrying conductor and the output of the sensor)		

	<b>CLN-50</b>	<b>CLN-100</b>
50 A rms	100 A rms	
0 to $\pm 90$ A	0 to $\pm 150$ A	
<b>R. min.</b> <b>R. max.</b>	<b>R. min.</b> <b>R. max.</b>	
50 ohms – 90 ohms	n/a      n/a	
n/a      n/a	30 ohms      55 ohms	
n/a      n/a	10 ohms      25 ohms	
70 ohms – 100 ohms	n/a      n/a	
n/a      n/a	30 ohms      85 ohms	
n/a      n/a	30 ohms      40 ohms	
50 mA	100 mA	
1:1000		
$\pm 0.9\%$ of $I_N$		
$\pm 0.5\%$ of $I_N$		
$\pm 12$ to $\pm 15$ ( $\pm 5\%$ )		
3 kV rms/50 Hz/1 min.		

## Accuracy-Dynamic Performance

Zero current offset at 25°C .....	$\pm 0.2$ mA max.
Offset current temperature drift between 0°C and +70°C .....	$\pm 0.3$ mA typ., $\pm 0.5$ mA max.
between -25°C and +85°C .....	$\pm 0.3$ mA typ., $\pm 0.8$ mA max.
Linearity .....	better than $\pm 0.1\%$
Response time .....	less than 500ns
di/dt accurately followed .....	better than 100 A/ $\mu$ s
Bandwidth .....	0 to 150 kHz (-1dB)

## General Information

Operating temperature .....	-40°C to +85°C
Storage temperature .....	-40°C to +90°C
Current drain (plus output current) .....	10 mA (at $\pm 15$ V)      14 mA (at $\pm 15$ V)
Coil resistance at +70°C .....	30 ohms
Package .....	Flame retardant plastic case
Weight .....	18 grams      21 grams
Mounting .....	Designed to mount on PCB via thru hole connection pins
Aperture .....	0.492" x 0.354"      (12.5 mm x 9 mm)
Output reference .....	To obtain a positive output on the terminal marked "O/P", aperture current must flow in the direction of the arrow (conventional flow)

**Notes:** - The temperature of the current carrying conductor should not exceed 90°C.




# Current Sensors


## Mechanical Dimensions

All dimensions are in inches (millimeters)


### Model CLN-50

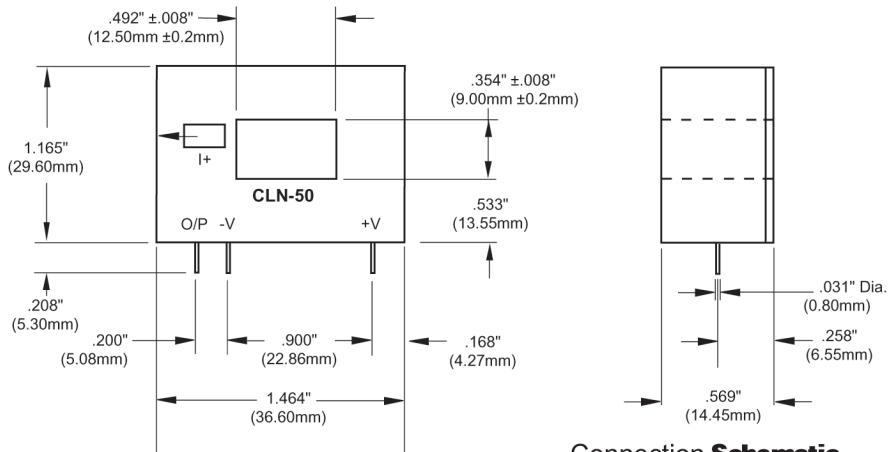


Connection Schematic

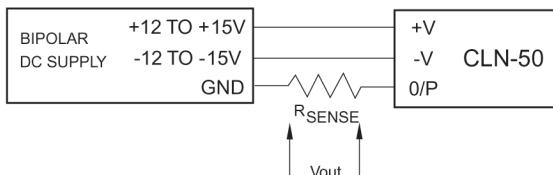

### Model CLN-100

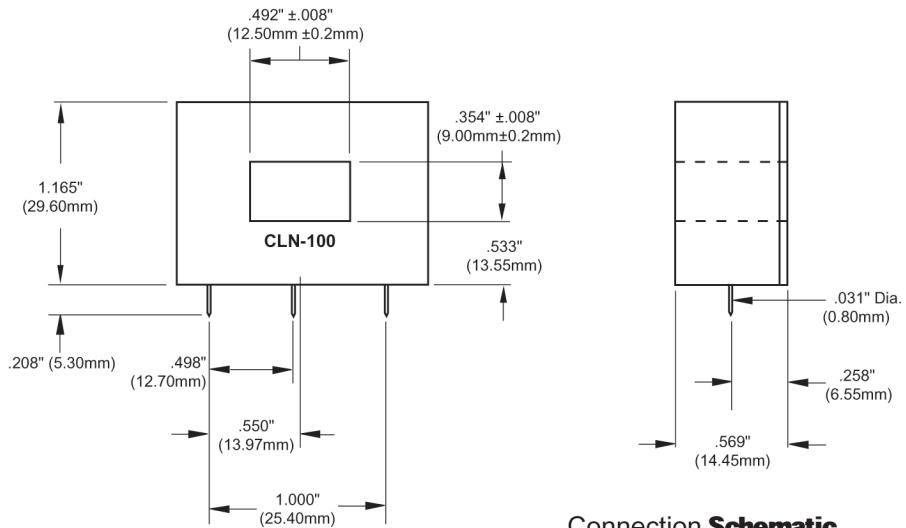

Connection Schematic

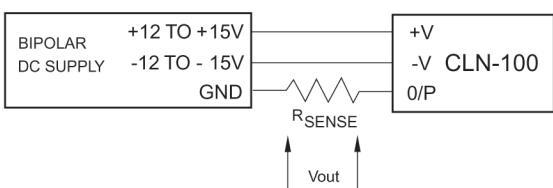

**Note:** Due to continuous process improvement, specifications subject to change without notice.

