

MicroSmart Performance

Features:

- Available in 10, 16, 20, 24, and 40 I/O CPUs.
- PID Controls
 - Program up to 14 PID loops
- High Speed I/O
 - Built-in 4 high speed inputs
 - Single or Dual Phase
 - Max. 20KHz frequency
- Built-in 2 High speed outputs (Slim model only)
- Configure up to 264 I/O Points
- Data link up to 32 MicroSmart and Pentra CPUs
- Using RS485 communication module/port, you can create a network of up to 32 CPUs.
- Worldwide Approvals
 - cULus listed, CE marked
 - Class 1 Div. 2 for hazardous locations
 - Lloyds Registered and ABS approved for shipping industry



MicroSmart CPU Part Numbers

All-in-One

Appearance	Part Number	Power	I/O Points	Input	Output	Expandability
	FC4A-C10R2C	24V DC	10 (6 in/ 4 out)	24V DC (Sink/Source)	Relay	N/A
	FC4A-C10R2	100-240V AC				
	FC4A-C16R2C	24V DC	16 (9 in/ 7 out)	24V DC (Sink/Source)	Relay	N/A
	FC4A-C16R2	100-240V AC				
	FC4A-C24R2C	24V DC	24 (14 in/ 10 out)			88 Maximum I/O (up to 4 expansion modules)
	FC4A-C24R2	100-240V AC				

MicroSmart CPU Part Numbers**Slim**

Appearance	Part Number	Power	I/O Points	Input	Output	Expandability
	FC4A-D20RK1				6 Relays, 2 Transistor Sink	244 Maximum I/O (up to 7 expansion modules)
	FC4A-D20RS1				6 Relays, 2 Transistor Source	
	FC4A-D20K3	24V DC	20 (12 in/8 out)		Transistor Sink	148 Maximum I/O (up to 7 expansion modules)
	FC4A-D20S3			24V DC (Sink/Source)	Transistor Source	
	FC4A-D40K3				Transistor Sink	264 Maximum I/O (up to 7 expansion modules)
	FC4A-D40S3		40 (24 in/16 out)		Transistor Source	

PLCs

Operator Interfaces

Automation Software

Power Supplies

Sensors

Communication & Networking

Digital I/O Expansion Modules

Features:

- 15 modules to choose from
- Available with Screw or MIL connectors
- Easy snap-on
- Available 8, 16 or 32 point modules
- Up to 512 I/O can be configured in the Pentra and 264 I/O in the MicroSmart system

Input Modules

Appearance	Part Number	Input	Input Points	Terminal
	FC4A-N08A11	100-120V AC	8	
	FC4A-N08B1			Removable Screw Terminals
	FC4A-N16B1	24V DC	16	
	FC4A-N16B3			MIL Connector (ribbon cable)
	FC4A-N32B3		32	

Digital I/O Expansion Modules**Output Modules**

Appearance	Part Number	Output	Output Points	Terminal
	FC4A-R081		8	
		Relay		
	FC4A-R161		16	Removable Screw Terminals
	FC4A-T08K1		8	
	FC4A-T16K3	Transistor Sink	16	
	FC4A-T32K3		32	MIL Connector (ribbon cable)

PLCs

Operator Interfaces

Automation Software

Power Supplies

Sensors

Communication & Networking

Digital I/O Expansion Modules

Output Modules (cont.)

PLCs	Appearance	Part Number	Output	Output Points	Terminal
Operator Interfaces		FC4A-T08S1		8	Removable Screw Terminals
Automation Software		FC4A-T16S3	Transistor Source	16	
Power Supplies		FC4A-T32S3		32	MIL Connector (ribbon cable)

Combination I/O Modules

Communication & Networking	Appearance	Part Number	Input	Output	I/O Points	Terminal
Sensors		FC4A-M08BR1			8 (4 in/4 out)	Removable Screw Terminals
		FC4A-M24BR2	24V DC (Sink/Source)	Relay	24 (16 in/ 8 out)	Wire Spring Clamp

Analog I/O Expansion Modules**Features:**

- 8 modules
- 0-10V, 4-20mA, RTD, Thermocouple, Thermistor inputs, 0-10V DC or -10V DC to 10V DC output
- 12 or 16-bit resolution
- Fast conversion time
- Maximum of 56 I/O can be configured in the MicroSmart Pentra system
- Easy to configure using a Macro instruction in WindLDR

Modules

Appearance	Part Number	I/O Points	Input	Output	Resolution	Terminal
	FC4A-J8C1	8 (8 inputs)		-	16-bit (0-50000)	
	FC4A-L03A1	3 (2 inputs, 1 output)	0-10V DC, 4-20mA	0-10V DC, 4-20mA		
	FC4A-J2A1	2 (2 inputs)		-	12-bit (0-4095)	Removable Screw Terminals
	FC4A-J4CN1	4 (4 inputs)	0-10V DC, 4-20mA, RTD, Thermocouple	-	16-bit (0-50000)	
	FC4A-L03AP1	3 (2 inputs, 1 output)	RTD, Thermocouple	0-10V DC, 4-20mA	12-bit (0-4095)	

Analog I/O Expansion Modules

Modules (cont.)

PLCs

	Appearance	Part Number	I/O Points	Input	Output	Resolution	Terminal
Operator Interfaces		FC4A-J8AT1	8 (8 inputs)	Thermistor (NTC/PTC)	—	12-bit (0-4000)	
Automation Software		FC4A-K2C1	2 (2 outputs)	—	-10 to 10V DC, 4-20mA	16-bit (0-50000)	Removable Screw Terminals
Power Supplies		FC4A-K1A1	1 (1 output)	—	0-10V DC, 4-20mA	12-bit (0-4095)	

Sensors

Communication & Networking

Communication Modules

Web Server Module

Features:


- Easy to configure
- Comes with interface cable and Quick Start Guide

Part Numbers

Appearance	Part Number	Description
The image shows a silver IDEC Web Server Module. It has a small touchscreen display at the top, several status LEDs, and various connection ports including Ethernet and RS232C.	FC4A-ENET	Web Server Module (includes cable and Quick Start Guide)
A thumbnail image of the Quick Start Guide document, which is a white booklet with blue text and a small IDEC logo.	FC9Y-QS100-0	Quick Start Guide


Remote Maintenance

- Easily monitor machine conditions, change machine configurations, or upload and download user programs from anywhere, using IDEC WindLDR software over an Ethernet network.
- For a more graphical display and remote data archiving, OPC servers, such as IDEC WindSRV or standard SCADA software, can be used.
- Save time and money:
-Access system parameters from your desk, conference room or home to check machine status without walking the factory floor.
-If a machine is down, you no longer need to send someone with their laptop to debug or download a new user program.

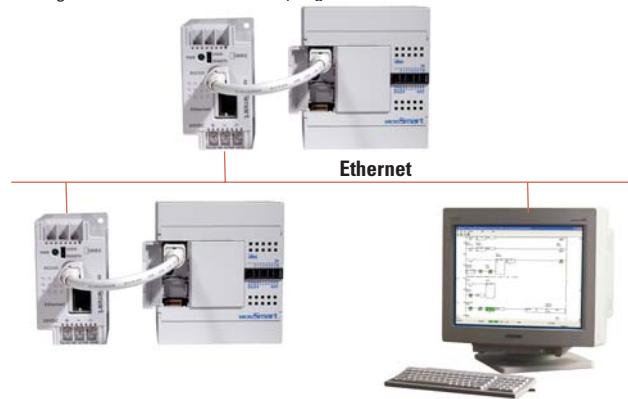

Web Server Functions

- Machine status can be monitored and controlled from any PC using standard internet browsers, such as Internet Explorer.
- A built-in custom template, which allows you to monitor and change system parameters, is included.
- Get more flexibility and control by creating your own custom webpage.

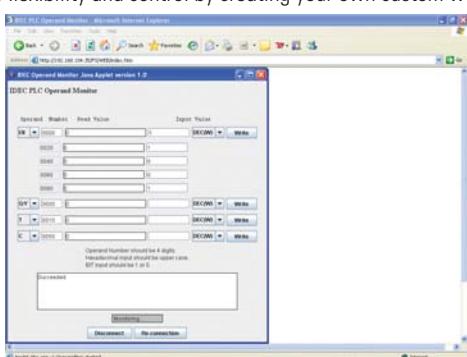

Alarm Messaging


Real-time updates of error status or process conditions can be sent to an email address or cellular phone.

- A maximum of 32 customizable messages can be predefined with up to two email addresses each.




O/I Connectivity

- Using the IDEC Web Server Module on an Ethernet network, an IDEC PLC can be configured as a host to an IDEC operator interface. This allows the touchscreen and PLC to be in separate locations.
- No longer hassle with specialized cables and serial connection limitations.

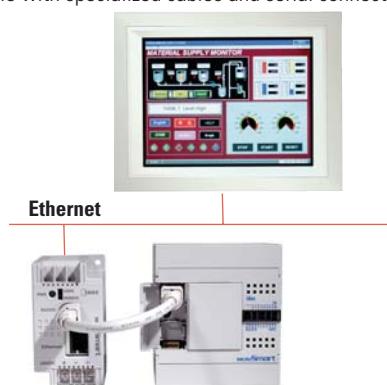

Communication Modules

AS-Interface Module

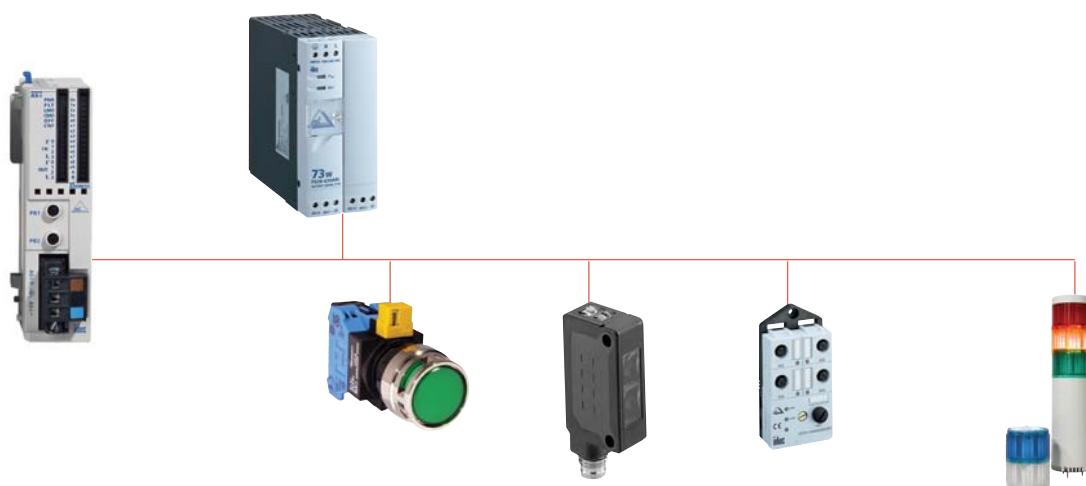

AS-Interface Master Module

Appearance	Part Number	Description
	FC4A-AS62M	MicroSmart AS-Interface Master Module

The Actuator Sensor-interface (AS-Interface) is the simplest and most cost-effective of the PLC-based, industrial-networking protocols. AS-Interface is a truly open, low-cost electromechanical connection system designed to operate over a two-wire cable carrying data and power over a distance of up to 100m. It is especially suitable for lower levels of plant automation where simple - often binary (On/Off) - field devices such as switches, sensors, and actuators need to interoperate in a local area automation network controlled by a PLC. IDEC supports this open technology.

IDE offers a plug-in AS-Interface master module (as well as other AS-Interface devices, please see AS-Interface Communication section) that is easy to configure; it can also connect up to 62 slaves. With this technology, you'll reduce the amount of engineering needed, simplify wiring and enhance your operations; requiring less maintenance. With an average cost of savings of 15 to 40% compared with traditional cabling methods, using an IDEC AS-Interface module is the easy choice.


Master-Slave Principle

The AS-Interface master controls and monitors the status of slave devices connected to the AS-Interface bus. Normally, the AS-Interface master is connected to a PLC (sometimes called 'host') or a gateway.

Various types of slave devices can be connected to the AS-Interface bus, including sensors, actuators, and remote I/O devices. Analog slaves can also be connected to process analog data. Slaves are available in standard slaves and A/B slaves. Standard slaves have an address of 1 through 31 in the standard address

range. A/B slaves have an address of 1A through 31A in the standard address range or 1B through 31B in the expanded address range. Among the A/B slaves, slaves with an address of

1A through 31A are called A slaves, and slaves with an address of 1B through 31B are called B slaves. (see AS-Interface Communication section for more details)

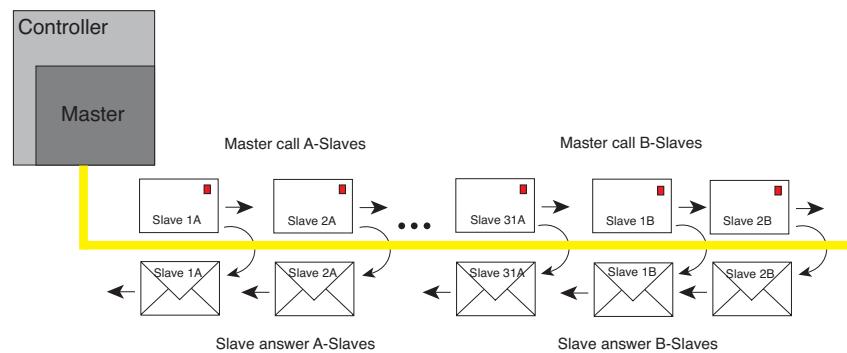

Optional Modules

PLCs

Appearance	Part Number	Description	Usage
	FC4A-HPH1	HMI Base Module	For mounting HMI module and communication ports with slim model CPU module (HMI module is not included)
	FC4A-PH1	HMI Module	For displaying and changing operands
	FC4A-PM32	EEPROM memory cartridge	32KB EEPROM memory cartridge
	FC4A-PM64	EEPROM memory cartridge	64KB EEPROM memory cartridge
	FC4A-PT1	Clock cartridge	Real-time clock cartridge

Communication Ports

Power Supplies

Appearance	Part Number	Description	Terminal
	FC4A-PC1	RS232C	Mini DIN
	FC4A-PC2	RS485	Mini DIN
	FC4A-PC3	RS485	Screw Terminal

Communication & Networking

Optional Modules

Communication Module — for Slim CPU


Appearance	Part Number	Description	Terminal
	FC4A-HPC1	RS232C	Mini DIN
	FC4A-HPC2	RS485	Mini DIN
	FC4A-HPC3	RS485	Screw Terminal

Expansion Power Supply Module


Appearance	Part Number	Description
	FC5A-EXM1M	Master Expansion Power Supply For MicroSmart Pentra
	FC5A-EXM1S	Slave Expansion Power Supply For MicroSmart Pentra
	FC5A-EXM2	Expansion Power Supply For MicroSmart Pentra

Expansion Power Supply System Configuration

FC5A-EXM2 (Expansion Interface Module)

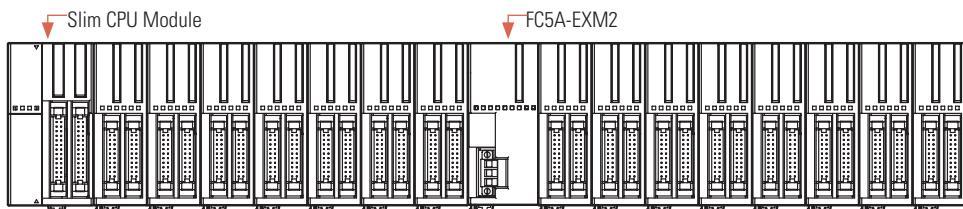

FC5A-EXM1M and FC5A-EXM1S (Expansion Interface Master & Slave Modules)

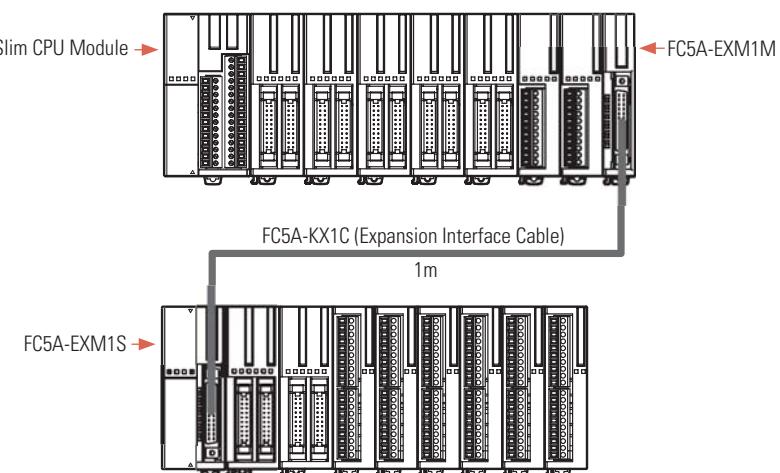

Cables

Communication Cables

Appearance	Part Number	Length	Expanded Description
	FC4A-KC4CA	5ft. (1.53m)	Programming cable (Maintenance/User Communication Mode selectable)
	FC4A-USB	6ft. (1.83m)	USB to Serial Converter (for use with PC without serial port)
	FC4A-KC3C	0.33ft. (100mm)	Web Server Module interface cable

Appearance	Part Number	Length	Expanded Description
	FC2A-KM1C	9.84 Ft. (3m)	Modem cable. Used to connect a modem to the MicroSmart RS232C port.
	FC2A-KP1C	9.84 Ft. (3m)	User communication cable. Used to connect RS232C equipment to the MicroSmart RS232C port.
	FC5A-KX1C	3.28 Ft. (1m)	MicroSmart Pentra expansion power supply interface cable. Used to connect expansion interface master and expansion slave modules.

MIL Connector Cables (use with Breakout Modules)

Use with	Part Number	Model	Length
CPU Module (26-wire) BX1D-S26A, BX1D-T26A	FC9Z-H050B26	Non-shielded	1.64ft. (0.5m)
	FC9Z-H100B26		3.28ft. (1m)
	FC9Z-H200B26		6.56ft (2m)
	FC9Z-H300B26		9.85ft. (3m)
	FC9Z-H050A26	Shielded	1.64ft. (0.5m)
	FC9Z-H100A26		3.28ft. (1m)
	FC9Z-H200A26		6.56ft (2m)
	FC9Z-H300A26		9.85ft. (3m)
	FC9Z-H100C26A	Shielded Single Connectors	5ft. (1.5m)

Use with	Part Number	Model	Length
I/O Expansion Modules (20-wire) BX1D-S20A, BX1D-T20A	FC9Z-H050B20	Non-shielded	1.64ft. (0.5m)
	FC9Z-H100B20		3.28ft. (1m)
	FC9Z-H200B20		6.56ft (2m)
	FC9Z-H300B20	Shielded	9.85ft. (3m)
	FC9Z-H050A20		1.64ft. (0.5m)
	FC9Z-H100A20		3.28ft. (1m)
	FC9Z-H200A20		6.56ft (2m)
	FC9Z-H300A20	Shielded Single Connectors	9.85ft. (3m)
	FC9Z-H100C20A		5ft. (1.5m)

Breakout Modules

Use with	Part Number	Description
26-wire MIL connector cable 	BX1D-S26A	26-terminal breakout module
	BX1D-T26A	26-terminal touch-down terminal breakout module
20-wire MIL connector cable 	BX1D-S20A	20-terminal breakout module
	BX1D-T20A	20-terminal touch-down terminal breakout module

Accessories

Part Number	Use with	Description
FC4A-PMT13P		13-position left-side terminal block for FC4A-D20RK1/-D20RS1 CPU
FC5A-PMT13P	CPU module	13-position left-side terminal block for FC5A-D16RK1/-D16RS1 CPU
FC4A-PMTS16P		16-position right-side terminal block for FC4A-D20RS1 and FC5A-D16RS1 CPU
FC4A-PMTK16P		16-position right-side terminal block for FC4A-D20RK1 and FC5A-D16RK1 CPU
FC4A-PMT11P	I/O expansion modules	11-position terminal block for 8-pt I/O expansion modules
FC4A-PMT10P		10-position terminal block for 16-pt I/O expansion modules
FC4A-PMC20P		20-position connector socket for MIL connector I/O expansion modules
FC4A-PMC26P		26-position connector socket for MIL connector CPU modules
FC4A-PSP1P		Direct mounting strips for mounting on a panel
FC4A-PMAC2P		Analog voltage input cable for slim CPU
FC4A-DS824-SW14		14-pt input simulator switch for 24 I/O CPU
FC4A-DS824-SW9		9-pt input simulator switch for 16 I/O CPU
FC4A-DS824-SW6		6-pt input simulator switch for 10 I/O CPU
BNL6		End clips
BNDN1000		DIN Rail (1m/3.28' long, 10.5mm height)
BAA1000		DIN Rail (1m/3.28' long, 7.5mm height)
FC9Z-SD2		2.5mm flathead IDEC screwdriver
FC9Y-B812-0A		MicroSmart user manual
FC9Y-B927-0		MicroSmart Pentra user manual
FC9Y-B919		Web Server Module user manual
FC9Y-B969-0		FC5A-SIF2 Communication Module user manual
FC9Y-B902-0		Analog I/O user manual
FC9Y-LP2CDW		WindLDR PLC programming software

Specifications

All-in-One

Part Number	AC Power	FC5A-C10R2	FC5A-C16R2	FC5A-C24R2	FC4A-C10R2	FC4A-C16R2	FC4A-C24R2
	DC Power	FC5A-C10R2C	FC5A-C16R2C	FC5A-C24R2C	FC4A-C10R2C	FC4A-C16R2C	FC4A-C24R2C
Rated Voltage	AC power model: 100 to 240V AC, DC power model: 24V DC						
Allowable Voltage Range	AC power model: 85 to 264V AC, DC power model: 20.4 to 28.8V DC (including ripple)						
Rated Power Frequency	AC power model: 50/60 Hz (47 to 63 Hz)						
Maximum Input Current	250mA (85V AC) 160mA (24V DC)	300mA (85V AC) 190mA (24V DC)	450mA (85V AC) ¹ 360mA (24V DC) ²	250mA (85V AC) 160mA (24V DC)	300mA (85V AC) 190mA (24V DC)	450mA (85V AC) ² 360mA (24V DC) ³	
Maximum Power Consumption	AC Power DC Power	FC5A-C10R2/FC4A-C10R2: 30VA (264V AC) / 20VA (100V AC) ³ FC5A-C16R2/FC4A-C16R2: 31VA (264 V AC) / 22VA (100V AC) ³ FC5A-C24R2/FC4A-C24R2: 40VA (264V AC) / 33VA (100V AC) ¹ FC5A-C10R2C/FC4A-C10R2C: 3.9W (24V DC) ⁴ FC5A-C16R2C/FC4A-C16R2C: 4.6W (24V DC) ⁴ FC5A-C24R2C/FC4A-C24R2C: 8.7W (24V DC) ²					
Allowable Momentary Power Interruption	10ms (rated power voltage)						
Dielectric Strength	Between power and or terminals: 1500V AC, 1 minute Between I/O and or terminals: 1500V AC, 1 minute						
Insulation Resistance	Between power and or terminals: 10 MΩ minimum (500V DC megger) Between I/O and or terminals: 10 MΩ minimum (500V DC megger)						
Noise Resistance	AC power terminals: 1.5 kV, 50 ns to 1µs DC power terminals: 1.0 kV, 50 ns to 1µs I/O terminals (coupling clamp): 1.5 kV, 50 ns to 1µs						
Inrush Current	35A	40A	35A	35A	40A	40A	
Power Supply Wire	UL1015 AWG22, UL1007 AWG18						
Operating Temperature	0 to 55°C						
Storage Temperature	-25 to +70°C (no freezing)						
Relative Humidity	Level RH1 (IEC61131-2), 1 to 95% RH (no condensation)						
Altitude	Operation: 0 to 2,000m, Transport: 0 to 3,000m						
Pollution Degree	2 (IEC60664-1)						
Corrosion Immunity	Free from corrosive gases						
Degree of Protection	IP20 (IEC60529)						
Grounding Wire	UL1007, AWG16						
Vibration Resistance	When mounted on a DIN rail or panel surface: 5 to 9 Hz amplitude 3.5 mm, 9 to 150 Hz acceleration 9.8 m/s ² (1G), 2 hours per axis on each of three mutually perpendicular axes (IEC61131-2)						
Shock Resistance	147 m/s ² (15G), 11ms duration, 3 shocks per axis, on three mutually perpendicular axes (IEC61131)						
Weight	AC: 230g DC: 240g	AC: 250g DC: 260g	AC: 305g DC: 310g	AC: 230g DC: 240g	AC: 250g DC: 260g	AC: 305g DC: 310g	



1. CPU module (including 250mA sensor power) + 4 I/O modules
2. CPU module + 4 I/O modules
3. CPU module (including 250mA sensor power)
4. CPU module (24V DC)

Slim

Part Number		FC5A-D16RK1 FC5A-D16RS1	FC5A-D32K3 FC5A-D32S3	FC4A-D20K3 FC4A-D20S3	FC4A-D20RK1 FC4A-D20RS1	FC4A-D40K3 FC4A-D40S3		
Control System		Stored program system						
Instruction Words		35 basic						
Program Capacity ¹		88 advanced	92 advanced	55 advanced	72 advanced			
User Program Storage		62.4 KB (10,400 steps)						
Processing Time		EEPROM (10,000 times rewritable)						
Basic Instruction		83µs (1,000 steps)						
END Processing ³		0.35ms						
Expandable I/O Modules		0.64ms						
I/O Points		7 modules + additional 8 modules using the expansion power supply module						
Input	8	Expansion: 224	16	Expansion: 224	12	Expansion: 224		
	8	Additional: 256	16	Additional: 256	8	16		
Output		7 modules						
Internal Relay		12 modules						
Shift Register		1,024 points						
Data Register		128 points						
Expansion Data Register		42,000 points ⁴						
Counter		1,300 points						
Timer (1-sec, 100-ms, 10-ms, 1-ms)		6,000 points						
Backup Data		—						
Backup Duration		6,000 points						
RAM Backup	Battery	Internal relay, shift register, counter, data register, expansion data register						
	Charging Time	Approx. 30 days (typical) at 25°C after backup battery fully charged						
	Battery Life	Lithium secondary battery						
	Replaceability	Approx. 15 hours for charging from 0% to 90% of full charge						
	Replaceability	5 years						
Self-diagnostic Function		N/A						
Input Filter		Power failure, watchdog timer, data link connection, user program EEPROM sum check, timer/counter preset value sum check, user program RAM sum check, keep data, user program syntax, user program writing, CPU module, clock IC, I/O bus initialize, user program execution						
Catch Input/Interrupt Input		Without filter or 3 to 15ms filter (selectable in increments of 1ms)						
Analog Potentiometer		Four inputs (I2 through I5) Minimum turn on pulse width: 5µs minimum Minimum turn off pulse width: 5µs minimum						
High-speed Counter	Maximum Counting Frequency and High-speed Counter Points	Four inputs (I2 through I5) Single/two-phase selectable: 100 KHz (2 points) Single-phase: 100 KHz (2 points)						
	Counting Range	Total 4 points 0 to 4294967295 (32 bits)						
	Operation Mode	Total 4 points Single/two-phase selectable: 20 KHz (2 points) Single-phase: 5 KHz (2 points)						
Analog Voltage Input		Number Input Voltage Range Input Impedance Data Range	0 to 65535 (16 bits)					
Pulse Output			Rotary encoder mode and adding counter mode					
Sensor Power Supply			1 point					
Port 1			0 to 255					
Port 2 Communication Adapter (option) ⁵		1 point						
Clock Cartridge (option)		0 to 10V DC						
Memory Cartridge (option)		Approx. 100kΩ						
HMI Module (option)		0 to 255 (8 bits)						
Number		2 points						
Maximum Frequency		3 points						
Output Voltage Current		2 points						
Isolation		100kHz						
Isolation		20kHz						
Port 1		—						
Port 2 Communication Adapter (option) ⁵		RS232C (maintenance communication, user communications)						
Clock Cartridge (option)		Possible	Possible	Possible	Possible	Possible		
Memory Cartridge (option)		Possible	Possible	Possible	Possible	Possible		
HMI Module (option)		Possible	Possible	Possible	Possible	Possible		



1. 1 step equals 6 bytes.
2. Expandable up to 64 KB when a memory cartridge is used.
3. Not including expansion I/O service time, clock function processing time, data link processing time, and interrupt processing time.
4. Extra data registers D10000 through D49999 are enabled using WindLDR.

Function Area Settings, then run-time program download cannot be used.
 5. Maintenance communication, user communication, Modem communication, data link, Modbus master/slave communication (FC5A only).
 Note: The maximum number of relay outputs that can be turned on simultaneously is 54 including those on the CPU module.

All-in-One

Part Number	FC5A-C10R2 FC5A-C10R2C	FC5A-C16R2 FC5A-C16R2C	FC5A-C24R2 FC5A-C24R2C	FC4A-C10R2 FC4A-C10R2C	FC4A-C16R2 FC4A-C16R2C	FC4A-C24R2 FC4A-C24R2C
Control System	Stored program system					
Instruction Words	76 advanced	76 advanced	81 advanced	38 advanced	40 advanced	46 advanced
Program Capacity ¹	13.8 KB (2,300 steps)	27 KB (4,500 steps)	54 KB (9,000 steps)	4.8 KB (800 steps)	15 KB (2,500 steps)	27 KB (4,500 steps)
User Program Storage	EEPROM (10,000 times rewritable)					
Processing Time	Basic Instruction END Processing ²	1.16ms (1,000 steps)			1.65ms (1,000 steps)	
Expandable I/O Module	—	4 modules		—	4 modules	
I/O Points	Input Output	6 4	9 7	14 10	Expansion: 64	9 14 10 Expansion: 64
Internal Relay		2,048 points			256 points	1,024 points
Shift Register		128 points			64 points	128 points
Data Register		2,000 points			400 points	1,300 points
Extra Data Register		—			—	
Counter		256 points			32 points	100 points
Timer (1-sec, 100-ms, 10-ms, 1-ms)		256 points			32 points	100 points
RAM Backup	Backup Data	Internal relay, shift register, counter, data register				
	Backup Duration	Approx. 30 days (typical) at 25°C after backup battery fully charged				
	Battery	Lithium secondary battery				
	Charging Time	Approx. 15 hours for charging from 0% to 90% of full charge				
	Battery Life	5 years				
	Replaceability	N/A				
Self-diagnostic Function		Power failure, watchdog timer, data link connection, user program EEPROM sum check, timer/counter preset value sum check, user program RAM sum check, keep data, user program syntax, user program writing, CPU module, clock IC, I/O bus initialize, user program execution				
Input Filter		Without filter or 3 to 15ms filter (selectable in increments of 1ms)				
Catch Input/Interrupt Input		Four inputs (I2 through I5) Minimum turn on pulse width: 40µs minimum Minimum turn off pulse width: 150µs minimum				
High-speed Counter	Maximum Counting Frequency and High-speed Counter Points	Total 4 points Single/two-phase selectable: 50KHz (1 point) Single-phase: 5KHz (3 points)			Total 4 points Single/two-phase selectable: 20KHz (1 point) Single-phase: 5KHz (3 points)	
	Counting Range	0 to 65535 (16 bits)				
	Operation Mode	Rotary encoder mode and adding counter mode				
	Analog Potentiometer	Number Data Range	1 point 0 to 255	2 points	1 point	2 points
Analog Voltage Input	Number					
	Input Voltage Range					
	Input Impedance					
Pulse Output	Data Range					
	Number					
	Max. Frequency					
Sensor Power Supply (AC Power Only)	Output Voltage Current	24V DC (+10% to -15%), 250mA				
	Overload Detection	N/A				
	Isolation	Isolated from the internal circuit				
Port 1		RS232C (maintenance communication, user communication)				
Port 2 Communication Adapter (option) ³		Possible	Possible	Possible	—	Possible
Clock Cartridge (option)		Possible	Possible	Possible	Possible	Possible
Memory Cartridge (option)		Possible	Possible	Possible	Possible	Possible
HMI Module (option)		Possible	Possible	Possible	Possible	Possible



1. 1 step equals 6 bytes.

2. Not including expansion I/O service time, clock function processing time, data link processing time, and interrupt processing time.

3. Maintenance communication, user communication, Modem communication, datalink, Modbus master/slave communication (FC5A only).

Note: The maximum number of relay outputs that can be turned on simultaneously is 33 including those on the CPU module.

Communication Port (RS232C Port 1)

Model	Slim CPU	All-in-One CPU
Standards		EIA RS232C
Maximum Baud Rate	FC5A: 57,600 bps (maintenance communication) FC4A: 19,200 bps (maintenance communication)	
Maintenance Communication	Possible	
User Communication	Possible	
Modem Communication	N/A	
Data Link	N/A	
Cable	Special cable (FC2A-KC4C, FC2A-KP1C, FC4A-KC1C, FC4A-KC2C)	
Isolation between Internal Circuit and Communication Port	Not isolated	

Input Specifications

Part Number	-	FC5A-D16RK1 FC5A-D16RS1	-	FC5A-D32K3 FC5A-D32S3	-	FC5A-C10R2 FC5A-C10R2C	FC5A-C16R2 FC5A-C16R2C	FC5A-C24R2 FC5A-C24R2C	
	FC4A-D20K3 FC4A-D20S3	-	FC4A-D20RK1 FC4A-D20RS1	-	FC4A-D40K3 FC4A-D40S3	FC4A-C10R2 FC4A-C10R2C	FC4A-C16R2 FC4A-C16R2C	FC4A-C24R2 FC4A-C24R2C	
Input Points	12 (12/1 common)	8 (8/1 common)	12 (12/1 common)	16 (8/1 common)	24 (12/1 common)	6 (6/1 common)	9 (9/1 common)	14 (14/1 common)	
Input Voltage	24V DC sink/source input signal								
Input Voltage Range	20.4 to 26.4V DC								
Input Current	FC5A I0, I1, I3, I4, I6, I7: 4.5mA/point (24V DC) I2, I5, I10 to I17: 7mA/point (24V DC) FC4A I0, I1, I6, I7: 5mA/point (24V DC) I2 to I5, I10 to I27: 7mA/point (24V DC)								
Input Impedance	FC5A I0, I1, I3, I4, I6, I7: I2 to I5, I10 to I17:	4.9kΩ 3.4kΩ	FC4A I0, I1, I6, I7: I2 to I5, I10 to I17:	5.7kΩ 3.4kΩ		FC5A I0 and I1: I2 to I7, I10 to I15:	3.7kΩ 3.4kΩ		
Turn ON Time	FC5A I0, I1, I3, I4, I6, I7: I2 and I5: I10 to I17:	5µs + filter value 35µs + filter value 40µs + filter value	FC4A I0, I1, I6, I7: I2 to I5: I10 to I27:	35µs + filter value 35µs + filter value 40µs + filter value		FC5A I0 and I1: I2 to I7: I6, I7, I10 to I15:	2µs + filter value 35µs + filter value 40µs + filter value		
Turn OFF Time	FC5A I0, I1, I3, I4, I6, I7: I2 and I5: I10 to I17:	5µs + filter value 150µs + filter value 150µs + filter value	FC4A I0, I1, I6, I7: I2 to I5: I10 to I27:	45µs + filter value 150µs + filter value 150µs + filter value		FC5A I0 and I1: I2 to I7: I6, I7, I10 to I15:	16µs + filter value 150µs + filter value 150µs + filter value		
Connector	On Mother Board	FL26A2MA (Oki Electric Cable)	MC1.5/18-G-3.81BK (Phoenix Contact)	FL26A2MA (Oki Electric Cable)		FC4A I0 and I1: I2 to I5: I6, I7, I10 to I15:	45µs + filter value 150µs + filter value 150µs + filter value		
	Insertion Durability	100 times minimum							
Isolation	Between input terminals: Photocoupler isolated Internal circuit: Not isolated								
Input	Type 1 (IEC61131-2)								
External Load for I/O Interconnection	Not needed								
Single Determination Method	Static								
Effect of Improper Input Connection	Both sinking and sourcing input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused.								
Cable Length	3 m in compliance with electromagnetic immunity								

PLCs

Transistor Sink and Source Output

Part Number		—	FC5A-D16RK1 FC5A-D16RS1	FC5A-D32K3 FC5A-D32S3
		FC4A-D20RK1 FC4A-D20RS1	—	FC4A-D40K3 FC4A-D40S3
Output Points		2 (2/1 common)	2 (2/1 common)	16 (8/1 common)
Output	Transistor Sink	FC5A-D16K1/D32K3 FC4A-D20K3/D20RK1/D40K3		
	Transistor Source	FC5A-D16RS1/D32S3 FC4A-D20S3/D20RS1/D40S3		
Load Voltage		24V DC		
Operating Load Voltage Range		20.4 to 28.8V DC		
Load Current		0.3A per output point		
Maximum Load Current		1A per common		
Voltage Drop (ON Voltage)		1V maximum (voltage between COM and output terminals when output is on)		
Inrush Current		1A		
Leakage Current		0.1mA maximum		
Clamping Voltage		39V±1V		
Maximum Lamp Load		8W		
Inductive Load		L/R = 10ms (28.8V DC, 1 Hz)		
External Current Draw		Sink output: 100mA maximum, 24V DC (power voltage at the +V terminal) Source output: 100mA maximum, 24V DC (power voltage at the -V terminal)		
Isolation		Between output terminal and internal circuit: Photocoupler isolated Between output terminals: Not isolated		
Connector on Mother Board		FL26A2MA (Oki Electric Cable)	MC1.5/16-G-3.81BK (Phoenix Contact)	FL26A2MA (Oki Electric Cable)
Connector Insertion/ Removal Durability		100 times minimum		
Output Delay	Turn ON Time	FC5A Q0 to Q2: 5µs max. Q3 to Q7, Q10 to Q17: 300µs max. FC4A Q0, Q1: 5µs max. Q2 to Q7, Q10 to Q17: 300µs max.		
	Turn OFF Time	FC5A Q0 to Q2: 5µs max. Q3 to Q7, Q10 to Q17: 300µs max. FC4A Q0, Q1: 5µs max. Q2 to Q7, Q10 to Q17: 300µs max.		

Operator Interfaces

Relay Output

Part Number		FC5A-C10R2 FC5A-C10R2C	FC5A-C16R2 FC5A-C16R2C	FC5A-C24R2 FC5A-C24R2C	FC5A-D16RK1 FC5A-D16RS1
		FC4A-C10R2 FC4A-C10R2C	FC4A-C16R2 FC4A-C16R2C	FC4A-C24R2 FC4A-C24R2C	FC4A-D20RK1 FC4A-D20RS1
No. of Outputs		4	7	10	8
Output Points per Common Line	COM0	3	4	4	2 (Transistor output)
	COM1	1	2	4	3
	COM2	—	1	1	2
	COM3	—	—	1	1
Output		1 NO form A			
Maximum Load Current		2A per point 8A per common line			
Minimum Switching Load		0.1mA/0.1V DC (reference value)			
Initial Contact Resistance		30 mΩ maximum			
Electrical Life		100,000 operations minimum (rated load 1,800 operations/hour)			
Mechanical Life		20,000,000 operations minimum (no load 18,000 operations/hour)			
Rated Load		240V AC/2A (resistive load, inductive load cos φ = 0.4) 30V DC/2A (resistive load, inductive load L/R = 7ms)			
Dielectric Strength		Between output and terminals: 1,500V AC, 1 minute Between output terminal and internal circuit: 1,500V AC, 1 minute Between output terminals (COMs): 1,500V AC, 1 minute			
Connector on Mother Board		—			
Connector Insertion/Removal Durability		—			



*MC1.5/16-G-3.81BK (Phoenix Contact)



Power Supplies

Sensors


Communication & Networking

Input Usage Limits


FC5A-D16RK1/D16RS1

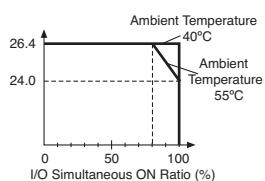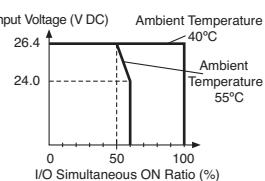FC5A-D32K3/D32S3
FC4A-D40K3/D40S3

FC4A-D20K3/D20S3

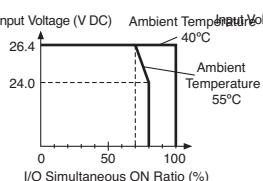

FC4A-D20RK1/D20RS1



All-in-One CPU

FC5A-C10R2

FC5A-C10R2C

FC4A-C10R2

FC4A-C10R2C

FC5A-C16R2

FC5A-C16R2C

FC4A-C16R2




FC4A-C16R2C

FC5A-C24R2

FC5A-C24R2C



FC4A-C24R2

FC4A-C24R2C

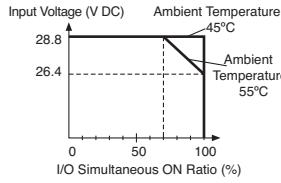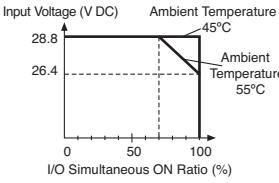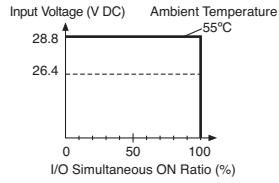


Input Internal Circuit

Slim CPU

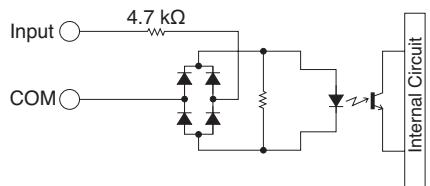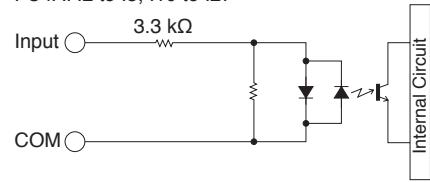FC5A: I0, I1, I3, I4, I6, I7
FC4A: I0, I1, I6, I7FC5A: I2, I5, I10 to I17
FC4A: I2 to I5, I10 to I27


All-in-One CPU

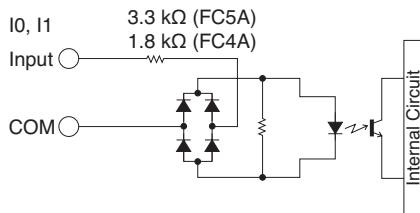


Output Internal Circuit

Slim CPU

Sink Output

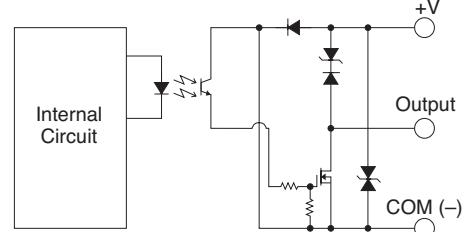

Source Output

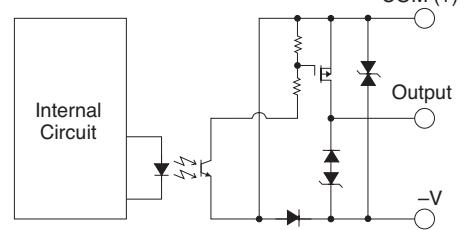

Communication Adapter/Module

Part Number	FC4A-PC1 FC4A-HPC1	FC4A-PC2 FC4A-HPC2	FC4A-PC3 FC4A-HPC3
Standards	EIA RS232C	EIA RS485	EIA RS485
Maximum Baud Rate	FC5A: 57600bps FC4A: 19200bps	FC5A: 57600bps FC4A: 19200bps	FC5A: 57600bps FC4A: 19200bps (38400 bps ¹)
Maintenance Communication	Possible	Possible	Possible
User Communication	Possible	—	Possible ²
Data Link Communication	—	—	Possible
Half-duplex Communication	—	—	Possible
Maximum Cable Length	Special cable ³	Special cable ⁴	200 m
Quantity of Slave Stations	—	—	31
Isolation between Internal Circuit and Communication Port	Not isolated		
Recommended Cable for RS485	—	Twisted-pair shielded cable with a minimum core wire of 0.3 mm ²	
Conductor Resistance		85Ω/km maximum	
Shield Resistance		20Ω/km maximum	

-  1. Maximum speed when data link is used.
 2. FC5A (all types), FC4A-D20RK1, FC4A-D20RS1, FC4A-D40K3, FC4A-D40S3
 3. FC2A-KC4C, FC2A-KM1C, FC4A-KC1C, FC4A-KC2C, FC2A-KP1C
 4. FC2A-KP1C

HMI Module (Optional)

Part Number	FC4A-PH1
Power Voltage	5V DC (supplied from the CPU module)
Weight	20g

Memory Cartridge Specifications (Optional)

Part Number	FC4A-PM32	FC4A-PM64
Memory	EEPROM	
Accessible Memory Capacity	32 KB	64 KB
Hardware for Storing Data	CPU Module	
Software for Storing Data	WindLDR	
Quantity of Stored Programs	One user program can be stored on one memory cartridge	

Clock Cartridge (Optional)

Part Number	FC4A-PT1
Accuracy	±30 sec/month (typical) at 25°C
Backup Duration	Approx. 30 days (typical) at 25°C after backup battery fully charged
Battery	Lithium secondary battery
Charging Time	Approx. 10 hours for charging from 0% to 90% of full charge
Replaceability	N/A

Input Module

Part Number	FC4A-N08B1	FC4A-N16B1	FC4A-N16B3	FC4A-N32B3	FC4A-N08A11
Input Points	8 (8/1 common)	16 (16/1 common)		32 (16/1 common)	8 (4/1 common)
Input Voltage	24V DC sink/source input signal				100 to 120V AC (50/60 Hz)
Input Voltage Range	20.4 to 28.8V DC				85 to 132V AC
Input Current	7mA/point (24V DC)		5mA/point (24V DC)		17mA/point (120V AC, 60 Hz)
Input Impedance	3.4kΩ		4.4kΩ		0.8kΩ (60 Hz)
ON Voltage	15V minimum				9V minimum
OFF Voltage	5V maximum				20V maximum
ON Current	4.2mA minimum (at 15V DC)		3.2mA minimum (at 15V DC)		—
OFF Current	1.2mA maximum		0.9mA maximum		—
Turn ON Time	4ms				25ms
Turn OFF Time	4ms				30ms
Isolation	Between input terminals: Not isolated Internal circuit: Photocoupler isolated				Between input terminals in the same common: Not isolated Between input terminals in different commons: Isolated Between input terminals and internal circuits: Photocoupler isolated
External Load for I/O Interconnection	Not needed				Not needed
Single Determination Method	Static				Static
Effect of Improper Input Connection	Both sink and source input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused.				If any input exceeding the rated value is applied, permanent damage may be caused.
Cable Length	3m in compliance with electromagnetic immunity				—
Connector on Mother Board	MC1.5/10-G-3.81BK (Phoenix Contact)		FL26A2MA (Oki Electric Cable)		MC1.5/10-G-3.81BK (Phoenix Contact)
Connector Insertion/Removal Durability	100 times minimum				
Applicable Ferrule	1-wire: A1 0.5-8 WH 2-wire: A1-TWIN 2×0.5-8 WH		—		—
Internal Current Draw	All Inputs ON	25mA (5V DC)	40mA (5V DC)	35mA (5V DC)	60mA (5V DC), 0mA (24V DC)
	All Inputs OFF	5mA (5V DC)	5mA (5V DC)	5mA (5V DC)	30mA (5V DC), 0mA (24V DC)
Internal Power Consumption (at 24V DC while all inputs ON)	0.17W	0.27W	0.24W	0.44W	—
Weight	85g	100g	65g	100g	80g

Transistor Output Modules

Part Number	FC4A-T08K1 FC4A-T08S1	FC4A-T16K3 FC4A-T16S3	FC4A-T32K3 FC4A-T32S3	Part Number	FC4A-T08K1 FC4A-T08S1	FC4A-T16K3 FC4A-T16S3	FC4A-T32K3 FC4A-T32S3
Output Points	8 (8/1 common)	16 (16/1 common)	32 (16/1 common)	Connector on Mother Board	MC1.5/10-G-3.81BK (Phoenix Contact)	FL26A2MA (Oki Electric Cable)	
Output	FC4A-T®K®: Transistor sink output FC4A-T®S®: Transistor source output			Connector Insertion/Removal Durability	100 times minimum		
Load Voltage	24V DC			Applicable Ferrule	1-wire: A1 0.5-8 WH 2-wire: A1-TWIN 2×0.5-8 WH		
Operating Load Voltage Range	20.4 to 28.8V DC			Internal Current Draw	All outputs ON	10mA (5V DC) 20mA (24V DC)	10mA (5V DC) 40mA (24V DC)
Maximum Load Current	0.3A per point 3A per common	0.1A per point 1A per common			All outputs OFF	5mA (5V DC) 0mA (24V DC)	5mA (5V DC) 0mA (24V DC)
Voltage Drop (ON Voltage)	1V maximum (voltage between COM and output terminals when output is on)			Internal Power Consumption (at 24V DC while all outputs ON)	0.55W	1.03W	1.82W
Inrush Current	1A maximum			Output Delay	Turn ON Time	300μs maximum	
Clamping Voltage	39V±1V			Turn OFF Time		300μs maximum	
Maximum Lamp Load	8W			Weight	85g	70g	105g
Inductive Load	L/R = 10ms (28.8V DC) FC4A-T®K®: 100mA maximum, 24V DC (power voltage at the +V terminal) FC4A-T®S®: 100mA maximum, 24V DC (power voltage at the -V terminal)						
External Current Draw	Between output terminal and internal circuit: Photocoupler isolated Between output terminals: Not isolated						
Isolation							

Relay Output Module Specifications







Part Number	FC4A-R081	FC4A-R161
Output Points	8 (4/1 common)	16 (8/1 common)
Output		1NO (form A)
Maximum Load Current		2A per point
	7A per common	8A per common
Minimum Switching Load		0.1mA/0.1V DC (reference value)
Initial Contact Resistance		30mΩ maximum
Electrical Life		100,000 operations minimum (rated load 1,800 operations/hour)
Mechanical Life		20,000,000 operations minimum (no load 1,800 operations/hour)
Rated Load		240V AC/2A (resistive load, inductive load $\cos \phi = 0.4$) 30V DC/2A (resistive load, inductive load $L/R = 7\text{ms}$)
Dielectric Strength		Between output and \ominus or \oplus terminals: 1,500V AC 1 minute Between output terminal and internal circuit: 1,500V AC, 1 minute Between output terminals (COMs): 1,500V AC, 1 minute
Connector On Mother Board	MC1.5/11-G-3.81BK (Phoenix Contact)	MC1.5/10-G-3.81BK (Phoenix Contact)
Connector Insertion/Removal Durability		100 times minimum
Applicable Ferrule		1-wire: A1 0.5-8 WH 2-wire: A1-TWIN 2×0.5-8 WH
Internal Current Draw	All outputs ON	30mA (5V DC) 40mA (24V DC)
	All outputs OFF	5mA (5V DC) 0mA (24V DC)
Internal Power Consumption (at 24V DC while all outputs ON)	1.16W	2.10W
Weight	110g	145g

Combination I/O Module Specifications

Part Number	FC4A-M08BR1	FC4A-M24BR2
Input Points	4 (4/1 common)	16 (16/1 common)
Input Voltage		24V DC sink/source input signal
Input Voltage Range		20.4 to 28.8V DC
Input Current		7mA/point (24V DC)
Input Impedance		3.4kΩ
ON Voltage		15V minimum
OFF Voltage		5V maximum
ON Current		4.2mA minimum (at 15V DC)
OFF Current		1.2mA maximum
Turn ON Time		4ms (24V DC)
Turn OFF Time		4ms (24V DC)
Isolation		Between input terminals: Not isolated Internal circuit: Photocoupler isolated
External Load for I/O Interconnection		Not needed
Signal Determination Method		Static
Effect of Improper Input Connection		Both sinking and sourcing input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused.
Cable Length		3m in compliance with electromagnetic immunity





Part Number	FC4A-M08BR1	FC4A-M24BR2
Technical Specification Summary	Output Points	4 (4/1 common)
	Output	1NO (form A)
	Maximum Load Current	2A per point 7A per common
	Minimum Switching Load	0.1mA/0.1V DC (reference value)
	Initial Contact Resistance	30 mΩ maximum
	Electrical Life	100,000 operations minimum (rated load 1,800 operations/hour)
	Mechanical Life	20,000,000 operations minimum (no load 18,000 operations/hour)
	Rated Load	240V AC/2A (resistive load, inductive load cos φ = 0.4) 30V DC/2A (resistive load, inductive load L/R = 7ms)
	Dielectric Strength	Between output and ⊕ or ⊖ terminals: 1,500V AC, 1 minute Between output terminal and internal circuit: 1,500V AC, 1 minute Between output terminals (COMs): 1,500V AC, 1 minute
Connector on Mother Board	MC1.5/11-G-3.81BK (Phoenix Contact)	Input: F6018-17P (Fujicon) Output: F6018-11P (Fujicon)
Connector Insertion/Removal Durability	100 times minimum	Not removable
Internal Current Draw	All I/Os ON	25mA (5V DC), 20mA (24V DC)
	All I/Os OFF	5mA (5V DC), 0mA (24V DC)
Internal Power Consumption (at 24V DC while all I/Os are ON)	0.65W	1.52W
Weight	95g	140g

Input Usage Limits

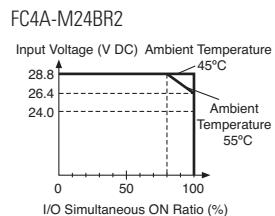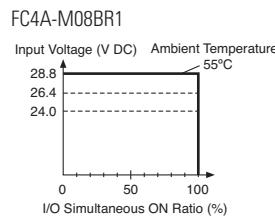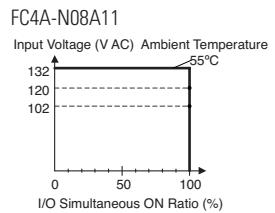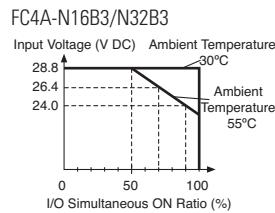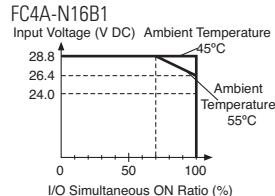
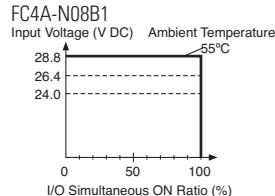


When using at an operating ambient temperature above 40°C, reduce the input voltage or the quantity of I/O points that turn on simultaneously.

Input Internal Circuit

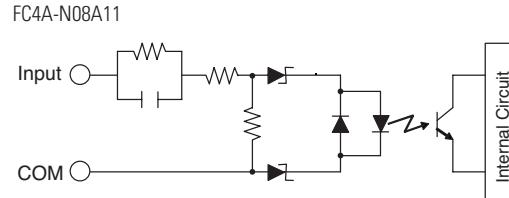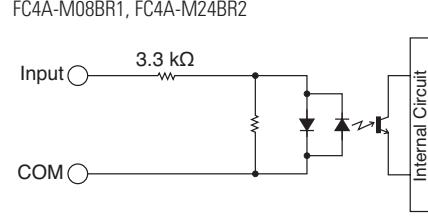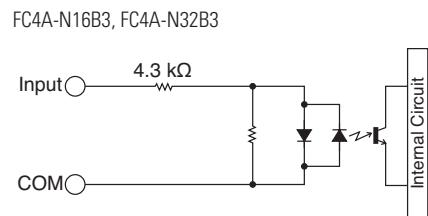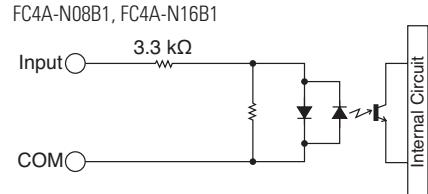

Output Internal Circuit

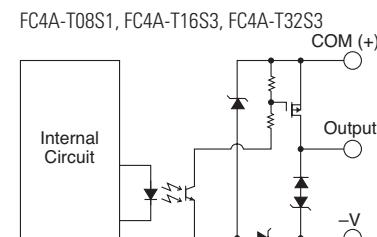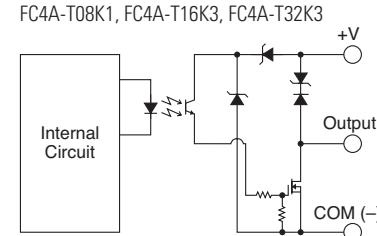

Analog I/O Modules Specifications

Analog I/O Module Specifications


Part Number	FC4A-L03A1	FC4A-L03AP1	FC4A-J2A1	FC4A-K1A1
Input Points	2	2	2	—
Input Signal	Voltage input (0 to 10V DC) Current input (4 to 20mA)	Thermocouple Resistance thermometer	Voltage input (0 to 10V DC) Current input (4 to 20mA)	—
Output Points	1	1	—	1
Output Signal	Voltage output (0 to 10V DC) Current output (4 to 20mA)	Voltage output (0 to 10V DC) Current output (4 to 20mA)	—	Voltage output (0 to 10V DC) Current output (4 to 20mA)
Power Voltage	24V DC			
Allowable Voltage Range	20.4 to 28.8V DC			
External Current Draw *	45mA (24V DC)	40mA (24V DC)	35mA (24V DC)	40mA (24V DC)
Connector on Mother Board	MC1.5/11-G-3.81BK (Phoenix Contact)			
Connector Insertion/Removal Durability	100 times minimum			
Applicable Ferrule	1 terminal: A1 0.5-8 WH, 2 terminals: A1-TWIN 2×0.5-8 WH			
Internal Current Draw	50mA (5V DC)			
Internal Power Consumption	0.34W (at 24V DC while all I/Os are ON)			
Weight	85g			

Part Number	FC4A-J4CN1	FC4A-J8C1	FC4A-J8AT1	FC4A-K2C1
I/O Points	4 inputs	8 inputs	8 inputs	2 outputs
Power Voltage	24V DC			
Allowable Voltage Range	20.4 to 28.8V DC			
Connector on Mother Board	MC1.5/11-G-3.81BK (Phoenix Contact)			
Connector Insertion/Removal Durability	100 times minimum			
Internal Current Draw	5V DC 24V DC	30mA 30mA 30mA 45mA	30mA 30mA 30mA 75mA (24V DC)	0mA 75mA (24V DC)
External Current Draw *	50mA (24V DC) 40mA (24V DC) 25mA (24V DC) 75mA (24V DC)			
Weight	140g 140g 125g 110g			




* The external current draw is the value when all the analog inputs are used and the analog output value is at 100%.

Input Circuit

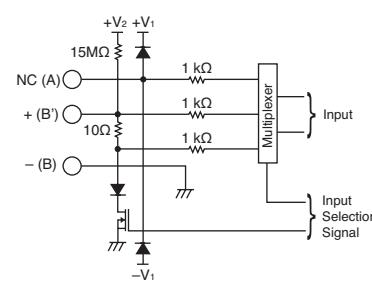

Output Circuit



Analog Input Specifications (1)

Part Number	FC4A-L03A1, FC4A-J2A1		FC4A-L03AP1	
Input Signal	Voltage Input 0 to 10V	Current Input 4 to 20mA	Thermocouple Type K (0 to 1300°C) Type J (0 to 1200°C) Type T (0 to 400°C)	Resistance Thermometer Pt100 3-wire type (-100 to 500°C)
Input Impedance	1 MΩ minimum	10Ω	1 MΩ minimum	1 MΩ minimum
Allowable Conductor Resistance (per wire)	—	—	—	200Ω maximum
Input Detection Current	—	—	—	1.0mA maximum
Sampling Duration Time	20ms maximum	20ms maximum	20ms maximum	20ms maximum
Sampling Repetition Time	20ms maximum	20ms maximum	20ms maximum	20ms maximum
Total Input System Transfer Time	105ms + 1 scan time	200ms + 1 scan time	200ms + 1 scan time	200ms + 1 scan time
Input	Single-ended		Differential	
Operating Mode			Self-scan	
Conversion Method			Σ Δ type ADC	
Input Error	Maximum Error at 25°C Temperature Coefficient Repeatability after Stabilization Time Non-linearity Maximum Error	±0.2% of full scale ±0.006% of full scale /°C ±0.5% of full scale ±0.2% of full scale ±1% of full scale	±0.2% of full scale plus reference junction compensation accuracy (±4°C maximum)	±0.2% of full scale
Digital Resolution	4096 increments (12 bits)			
Output Value of LSB	2.5mV	4µA	Type K: 0.325°C Type J: 0.300°C Type T: 0.100°C	0.15°C
Data Type in Application Program	Default: Optional:	0 to 4095 (12-bit data) -32768 to 32767 (optional range designation) ¹		
Monotonicity		Yes		
Input Data Out of Range		Detectable ²		
Noise Resistance	Maximum Temporary Deviation during Electrical Noise Tests Input Filter Cable Crosstalk	±3% maximum when a 500V clamp voltage is applied to the power and I/O wiring No Twisted pair shielded cable is recommended for improved noise immunity 2 LSB maximum		Accuracy is not assured when noise is applied.
Dielectric Strength		500V (between input and power circuit)		
Type of Protection		Photocoupler-isolated (between input and internal circuit)		
Effect of Improper Input Connection		No damage		
Maximum Permanent Allowed Overload (No Damage)	13V DC	40mA	—	—
Selection of Analog Input Signal		Using software programming		
Calibration or Verification to Maintain Rated Accuracy		N/A		

 1: The 12-bit data (0 to 4095) processed in the analog I/O module can be linear-converted to a value between -32768 and 32767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

2: When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.

Analog Input Specifications (2)

PLCs

Part Number	FC4A-J4CN1, FC4A-J8C1		FC4A-J4CN1		FC4A-J8AT1				
Input Signal	Voltage Input	Current Input	Thermocouple	Resistance Thermometer	NTC Thermistor	PTC Thermistor			
Input Range	0 to 10V	4 to 20mA	Type K (0 to 1300°C) Type J (0 to 1200°C) Type T (0 to 400°C)	Pt100, Pt1000 3-wire type (-100 to 500°C) Ni100, Ni1000 3-wire type (-60 to 180°C)	-50 to +150°C				
Input Impedance	1 MΩ minimum	12 Ω (FC4A-J4CN1) 100Ω (FC4A-J8C1)	0.9 MΩ minimum —	— —	— —				
Input Detection Current	—	—	—	0.1mA	0.1mA				
Sampling Duration Time	FC4A-J4CN1: FC4A-J8C1:	5ms maximum 1ms maximum	—	—	1ms maximum				
Sampling Repetition Time	FC4A-J4CN1: FC4A-J8C1:	5ms maximum 1ms maximum	—	—	10ms × channels				
Total Input System Transfer Time	FC4A-J4CN1: FC4A-J8C1:	40ms/ch + 1 scan time 6ms/ch + 1 scan time	—	—	10ms/ch + 1 scan time				
Input	Single-ended input								
Operating Mode	Self-scan								
Conversion Method	Σ Δ type ADC (FC4A-J4CN1), Successive approximation register method (FC4A-J8C1, FC4A-J8AT1)								
Input Error	Maximum Error at 25°C Plus Reference Junction Compensation Accuracy Temperature Coefficient Repeatability after Stabilization Time Non-linearity Maximum Error	— — — — — —	— — — — — —	±0.005% of full scale /°C ±2°C maximum ±0.005% of full scale /°C ±0.5% of full scale ±0.04% of full scale ±1% of full scale	— — — — — —				
Power Supplies	Digital Resolution	50000 increments (16 bits)	Type K: Approx. 24000 increments (15 bits) Type J: Approx. 33000 increments (15 bits) Type T: Approx. 10000 increments (14 bits)	Pt100: Approx. 6400 increments (13 bits) Pt1000: Approx. 64000 increments (16 bits) Ni100: Approx. 4700 increments (13 bits) Ni1000: Approx. 47000 increments (16 bits)	Approx. 4000 increments (12 bits)				
Sensors	Output Value of LSB	0.2mV	0.32µA	Type K: 0.058°C Type J: 0.038°C Type T: 0.042°C	Pt100: 0.086°C Pt1000: 0.0086°C Ni100: 0.037°C Ni1000: 0.0037°C	30Ω			
	Data Type in Application Program	Default: 0 to 50000 Optional: -32768 to 32767 (optional range designation) ²				Default: 0 to 4000 Optional: -32768 to 32767 (optional range designation) ¹			
		—	Temperature: °C, °F			Temperature: C, F Resistance: 0 to 10000			
Communication & Networking	Monotonicity	Yes							
	Input Data Out of Range	Detectable							
Noise Resistance	Maximum Temporary Deviation during Electrical Noise Tests	Accuracy is not assured when noise is applied.							
	Input Filter	Software selectable							
	Cable	Twisted pair shielded cable is recommended for improved noise immunity	—			Twisted pair shielded cable is recommended for improved noise immunity			
	Crosstalk	2 LSB maximum	Between input and power circuit: Isolated Between input and internal circuit: Photocoupler-isolated						
	Isolation								













Effect of Improper Input Connection	No damage			
Maximum Permanent Allowed Overload (No Damage)	11V DC	22mA DC	—	—
Selection of Analog Input Signal	Using software programming			
Calibration or Verification to Maintain Rated Accuracy	N/A			

-  1: The 16-bit data (0 to 50000) processed in the analog I/O module can be linear-converted to a value between -32768 and 32767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.
2: When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.


Analog Output Specifications

Part Number	FC4A-L03A1	FC4A-L03AP1	FC4A-K1A1	FC4A-K2C1		
Output Voltage		0 to 10V DC		-10 to +10V DC		
Output Range		4 to 20mA				
Load Impedance		Voltage Output: 2kΩ minimum Current Output: 300kΩ maximum				
Load		Resistive load				
Settling Time	50ms	130ms	50ms	1ms/ch		
Total Output Transfer Time	50ms + 1 scan time	130ms + 1 scan time	50ms + 1 scan time	1ms × channels+ 1 scan time		
Output Error	Maximum Error at 25°C	±0.2% of full scale				
	Temperature Coefficient	±0.015% of full scale/°C				
	Repeatability after Stabilization Time	±0.5% of full scale				
	Output Voltage Drop	±1% of full scale				
	Non-linearity	±0.2% of full scale				
	Output Ripple	1 LSB maximum				
	Overshoot	0%				
	Total Error	±1% of full scale				
Digital Resolution		4096 increments (12 bits)	50000 increments (16 bits)			
Output Value of LSB	Voltage	2.5mV	0.4mV			
	Current	4μA	0.32μA			
Data Type in Application Program		Default: 0 to 4095 (standard)	-25000 to 25000 (voltage) 0 to 50000 (current)			
		Optional: -32768 to 32767 (optional range designation) ¹				
Monotonicity		Yes				
Current Loop Open		Undetectable				
Noise Resistance	Maximum Temporary Deviation during Electrical Noise Tests	±3% maximum when a 500V clamp voltage is applied to the power and I/O wiring				
	Cable	Twisted pair shielded cable is recommended for improved noise immunity				
Isolation	Crosstalk	None				
	Between output and power circuit	500V				
	Between output and internal circuit	Photocoupler-isolated				
Effect of Improper Output Connection		No damage				
Selection of Analog Output Signal		Using software programming				
Calibration or Verification to Maintain Rated Accuracy		N/A				

-  1: The 12-bit data (0 to 4095) processed in the analog I/O module can be linear-converted to a value between -32768 and 32767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

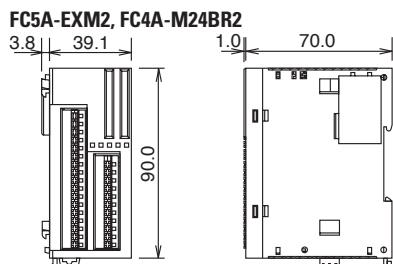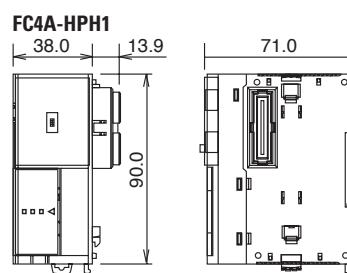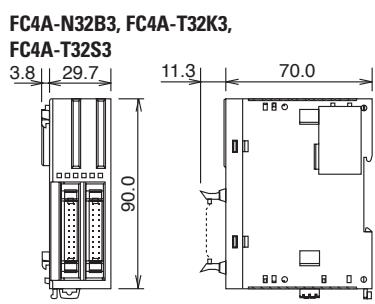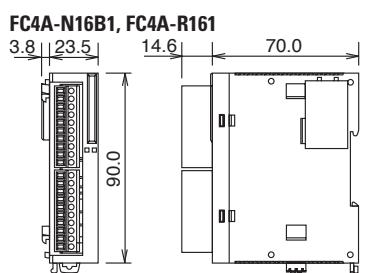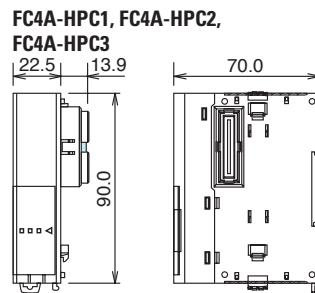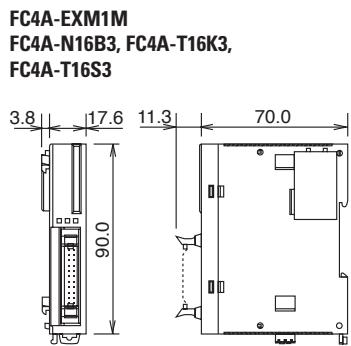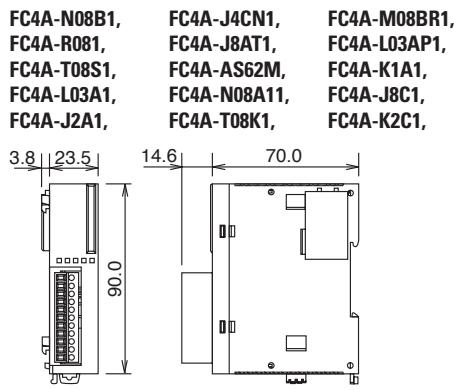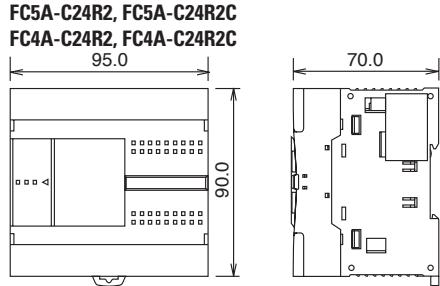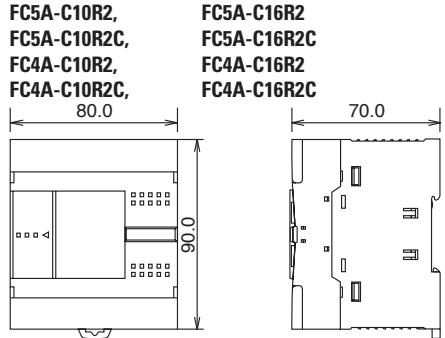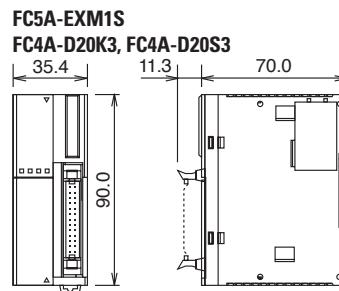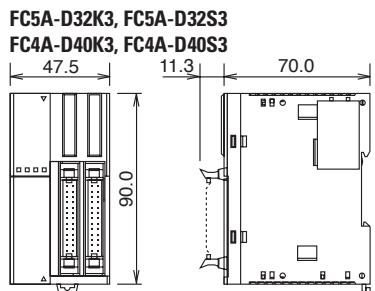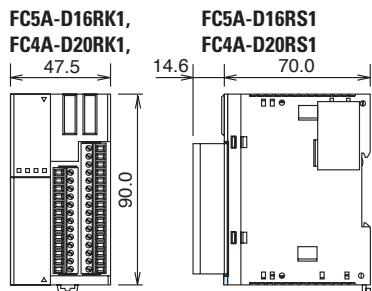


Example

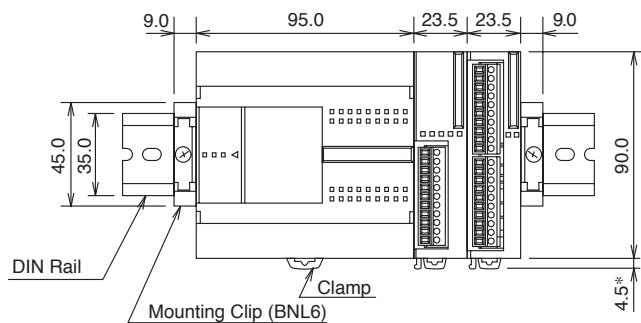


The figure illustrates a system setup consisting of the all-in-one 24-I/O CPU module, an 8-point relay output module, and a 16-point DC input module mounted on a 35-mm-wide-DIN rail using BNL6 mounting clips.

Mounting Hole Layout (mm)


FC5A-C10R2, FC5A-C16R2
FC5A-C10R2C, FC5A-C16R2C
FC4A-C10R2, FC4A-C16R2
FC4A-C10R2C, FC4A-C16R2C

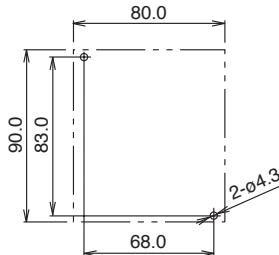


FC4A-N08A11, FC4A-R081
FC4A-R161, FC4A-T08K1
FC4A-T08S1, FC4A-M08BR1
FC4A-L03A1, FC4A-L03AP1
FC4A-J2A1, FC4A-K1A1
FC4A-J4CN1, FC4A-T8C1
FC4A-J8AT1, FC4A-K2C1

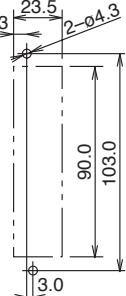


FC5A-EXM2
FC4A-M24BR2

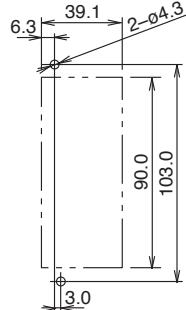


FC5A-EXM1S, FC4A-D20K3
FC4A-D20S3

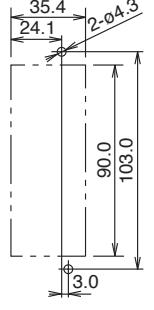


FC5A-C24R2,
FC4A-C24R2C
FC4A-C24R2,
FC4A-C24R2C

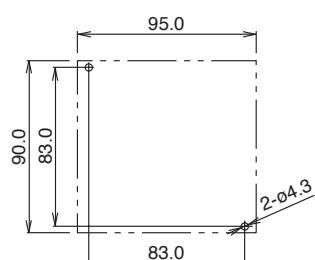


FC5A-EXM1M
FC4A-N16B3, FC4A-T16K3,
FC4A-T16S3

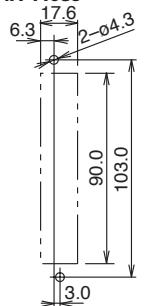


FC4A-HPC1
FC4A-HPC2
FC4A-HPC3

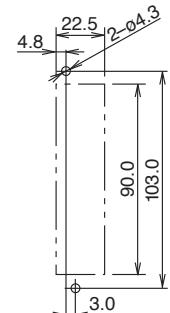


FC4A-N32B3, FC4A-T32K3,
FC4A-T32S3

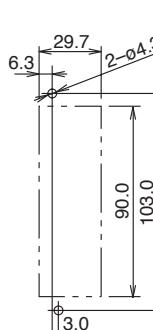


FC5A-D16RK1
FC5A-D16RS1
FC5A-D32K3
FC5A-D32S3
FC4A-D20RK1
FC4A-D20RS1
FC4A-D40K3
FC4A-D40S3

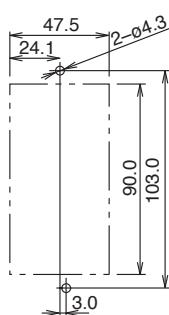

FC4A-HPH1

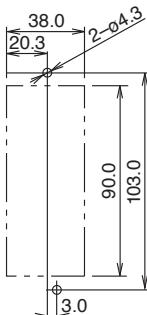


FC4A-HPH1

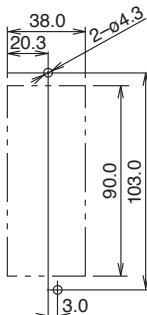

Examples

Mounting hole layout for FC5A-C24R2 or FC4A-C24R2 and four 23.5mm-wide I/O modules

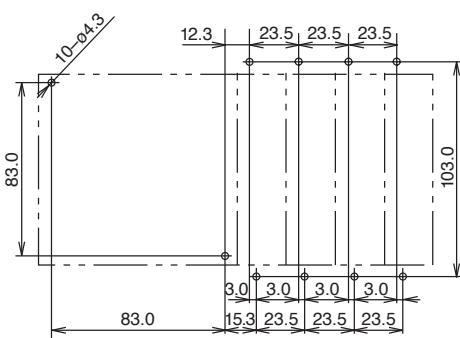

Mounting hole layout from left, FC4A-HPH1, FC4A-D20K3, FC4A-N16B3, FC4A-N32B3, and FC4A-M24BR2 modules

