


General Purpose Relay G7L

- A high-capacity, high-withstand voltage relay compatible with momentary voltage drops.
- No contact chattering for momentary voltage drops up to 50% of rated voltage.
- UL Class B construction standard.
- Wide-range AC-activated coil that handles 100 to 120 VAC at either 50 or 60 Hz.
- Miniature hinge for maximum switching capacity, particularly for inductive loads.
- Flame resistant materials (UL94V-0-qualifying) used for all insulation material.
- Quick-connect, screw, and PCB terminals available.
- Standard models are UL, CSA, and TUV approved; VDE versions now available.
- Conforming to IEC 950.

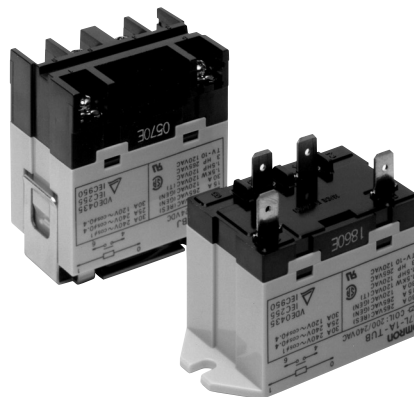

Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G7L-1A-T-CB-AC100/120).

Replaces G5D series.

| Type | Contact form | Model | | |
|-------------------------------------|--------------|---------------------------|---------------------------|--------------|
| | | Quick-connect terminal | Screw terminal | PCB terminal |
| E bracket | SPST-NO | G7L-1A-T-CB (see note 1) | G7L-1A-B-CB (see note 1) | — |
| | DPST-NO | G7L-2A-T-CB (see note 1) | G7L-2A-B-CB (see note 1) | — |
| E bracket (with test button) | SPST-NO | G7L-1A-TJ-CB (see note 1) | G7L-1A-BJ-CB (see note 1) | — |
| | DPST-NO | G7L-2A-TJ-CB (see note 1) | G7L-2A-BJ-CB (see note 1) | — |
| Upper bracket | SPST-NO | G7L-1A-TUB-CB | G7L-1A-BUB-CB | — |
| | DPST-NO | G7L-2A-TUB-CB | G7L-2A-BUB-CB | — |
| Upper bracket (with test button) | SPST-NO | G7L-1A-TUBJ-CB | G7L-1A-BUBJ-CB | — |
| | DPST-NO | G7L-2A-TUBJ-CB | G7L-2A-BUBJ-CB | — |
| PCB mounting | SPST-NO | — | — | G7L-1A-P-CB |
| | DPST-NO | — | — | G7L-2A-P-CB |

Note: 1. E bracket or socket must be used for mounting (part number R99-07G5D). Refer to “Accessories” section for options and part numbers.

2. For VDE approved versions, please consult OMRON.

Model Number Legend

G7L-□□-□□□□
1 2 3 4 5 6

1. Contact form

- 1A: SPST-NO
- 2A: DPST-NO

2. Terminal shape

- T: Quick-connect terminals
- P: PCB terminals
- B: Screw terminals

3. Mounting construction

- No symbol: E bracket type
- UB: Upper bracket type

4. Special functions

- No symbol: Without test button
- J: With test button

5. 80: VDE approved version

(includes UL, CSA and TÜV)

6. CB: Class B insulation

7. Rated coil voltage

Accessories

Quick-connect Terminals

| Description | Model | | | | Model |
|-------------------------|--------------|-----------|----------|-----------|--------------------|
| | Contact form | | | | |
| | SPST-NO | | DPST-NO | | |
| E-brackets | G7L-1A-T | G7L-1A-TJ | G7L-2A-T | G7L-2A-TJ | R99-07G5D |
| Track mounting adaptor | | | | | P7LF-D |
| Front connecting socket | | | | | P7LF-06 (see note) |
| Cover | | | | | P7LF-C |

Screw Terminals

| Description | Model | | | | Model |
|------------------------|--------------|-----------|----------|-----------|-----------|
| | Contact form | | | | |
| | SPST-NO | | DPST-NO | | |
| E-brackets | G7L-1A-B | G7L-1A-BJ | G7L-2A-B | G7L-2A-BJ | R99-07G5D |
| Track mounting adaptor | | | | | P7LF-D |

Note: P7LF-C cover is supplied with the P7LF-06 socket.

Specifications


Contact Data

| Load | G7L-1A-T, G7L-1A-B | | G7L-2A-T, G7L-2A-B | | G7L-1A-P, G7L-2A-P | |
|-------------------------|------------------------------|--------------------------------|------------------------------|--------------------------------|------------------------------|--------------------------------|
| | Resistive load (cosφ = 1) | Inductive load (cosφ = 0.4) | Resistive load (cosφ = 1) | Inductive load (cosφ = 0.4) | Resistive load (cosφ = 1) | Inductive load (cosφ = 0.4) |
| Rated load | 30 A, 220 VAC | 25 A, 220 VAC | | | 20 A, 220 VAC | |
| Contact material | Ag-alloy | | | | | |
| Carry current | 30 A | | 25 A | | 20 A | |
| Max. operating voltage | 250 VAC | | | | | |
| Max. operating current | 30 A | | 25 A | | 20 A | |
| Max. switching capacity | 6,600 VA | 5,500 VA | | | 4,400 VA | |
| Min. permissible load | 100 mA, 5 VDC | | | | | |


Note: P level: λ₆₀ = 0.1 x 10⁻⁶ operation.

Coil Internal Circuit

DC operating coil



AC operating coil



■ Coil Data

AC

| Rated voltage (V) | Rated current (mA) | Resistance (Ω) | Must operate | Must release | Max. voltage | Power consumption |
|-------------------|--------------------|----------------|--------------------|--------------|--------------|------------------------|
| | | | % of rated voltage | | | |
| 6 | 283 | 18.90 | 75% max. | 15% min. | 110% max. | Approx.1.70 to 2.50 VA |
| 12 | 142 | 75 | | | | |
| 24 | 71 | 303 | | | | |
| 50 | 34 | 1,310 | | | | |
| 100/120 | 17.00/20.40 | 5,260 | 75 volts | 18 volts | 132 volts | |
| 200/240 | 8.50/10.20 | 21,000 | 150 volts | 36 volts | 264 volts | |

DC

| Rated voltage (V) | Rated current (mA) | Resistance (Ω) | Must operate | Must release | Max. voltage | Power consumption |
|-------------------|--------------------|----------------|--------------------|--------------|--------------|-------------------|
| | | | % of rated voltage | | | |
| 6 | 317 | 18.90 | 75% max. | 15% min. | 110% max. | Approx.1.90 W |
| 12 | 158 | 75 | | | | |
| 24 | 79 | 303 | | | | |
| 48 | 40 | 1,220 | | | | |
| 100 | 19 | 5,260 | | | | |

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C (73°F) with tolerances of +15%/-20% for AC rated current and ±15% for DC coil resistance.

2. Performance characteristic data are measured at a coil temperature of 23°C (73°F).


■ Characteristics

| | | |
|----------------------------------|-------------------------------|---|
| Contact resistance | | 50 mΩ max. |
| Operate time | | 30 ms max. |
| Release time | | 30 ms max. |
| Max. operating frequency | Mechanical | 1,800 operations/hour |
| | Electrical | 1,800 operations/hour (under rated load) |
| Insulation resistance | | 1,000 MΩ min. (at 500 VDC) |
| Dielectric strength | | 4,000 VAC, min./5,000 VAC typical, 50/60 Hz for 1 minute between coil and contacts |
| | | 2,000 VAC, 50/60 Hz for 1 minute between contacts of same pole |
| | | 2,000 VAC, 50/60 Hz for 1 minute between contacts of different poles (DPST-NO type) |
| Impulse withstand voltage | | Between coil and contact: 10,000 V (impulse wave used: 1.20 x 50 μs) |
| Vibration | Mechanical durability | 10 to 55 Hz; 1.50 mm (0.06 in) double amplitude |
| | Malfunction durability | 10 to 55 Hz; 1.50 mm (0.06 in) double amplitude |
| Shock | Mechanical durability | 1,000 m/s ² (approx. 100 G) |
| | Malfunction durability | 1,000 m/s ² (approx. 10 G) |
| Life expectancy | Mechanical | 5,000,000 operations min. (at 1,800 operations/hour) |
| | Electrical | 100,000 operations min. (at 1,800 operations/hour under rated load) |
| Ambient temperature | | -20° to 85°C (-4° to 185°F) |
| Humidity | | 35% to 85% RH |
| Weight | | Quick-connect terminal type: approx. 90 g (3.17 oz) |
| | | PCB terminal type: approx. 100 g (3.52 oz) |
| | | Screw terminal type: approx. 120 g (4.23 oz) |


Note: Data shown are of initial value.

Characteristic Data

Maximum switching capacity

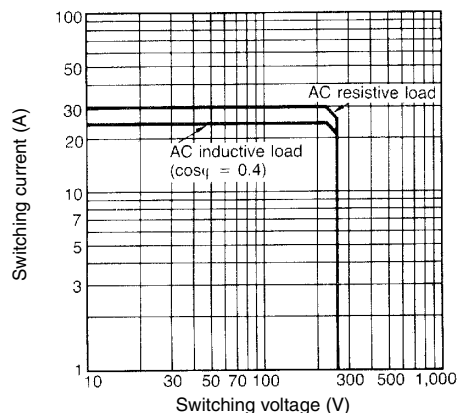

Electrical service life

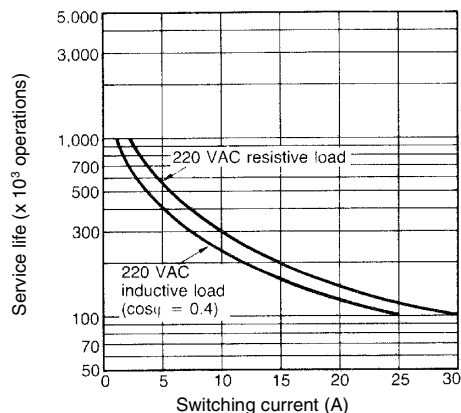


Dimensions


Unit: mm (inch)

Relays


G7L-1A-T (E Bracket Attached)*

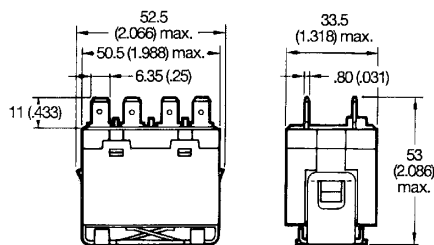


Terminal arrangement/ Internal connections (Top view)




Mounting holes (Bottom view)




G7L-2A-T (E Bracket Attached)*

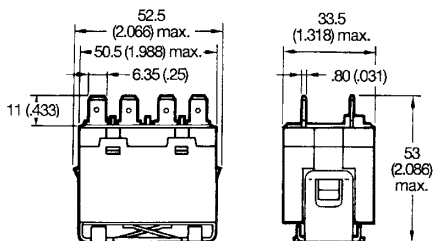

Terminal arrangement/ Internal connections (Top view)




Mounting holes (Bottom view)




* E bracket must be ordered separately.


**G7L-1A-TJ
(E Bracket Attached)***

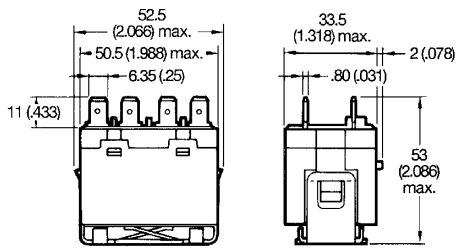


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




**G7L-2A-TJ
(E Bracket Attached)***

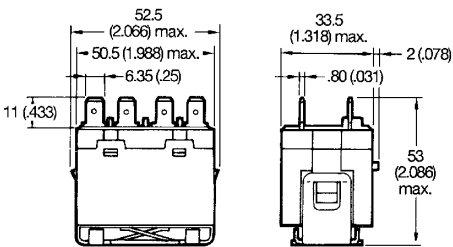


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




G7L-1A-TUB

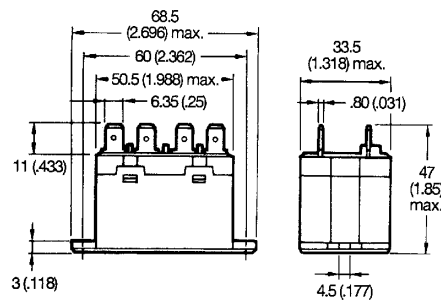


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




G7L-2A-TUB

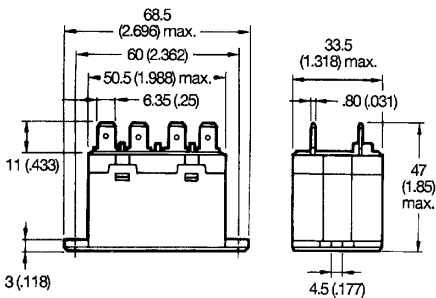

**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




*E bracket must be ordered separately.

Unit: mm (inch)


G7L-1A-TUBJ

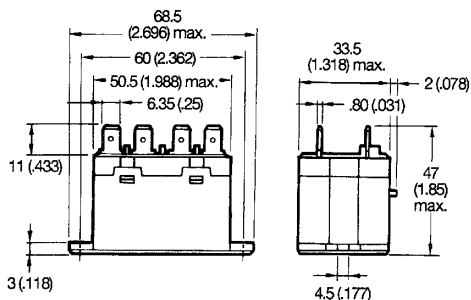


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




G7L-2A-TUBJ

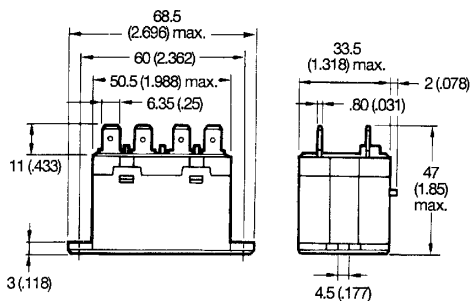


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




**G7L-1A-B
(E bracket Attached)***

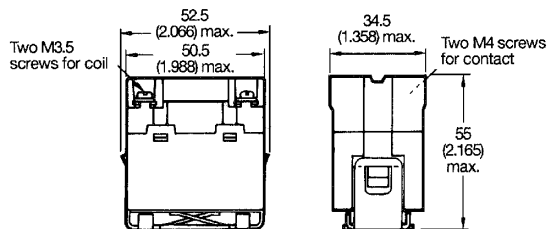


**Terminal arrangement/
Internal connections
(Top view)**




**Mounting holes
(Bottom view)**




**G7L-2A-B
(E bracket Attached)***

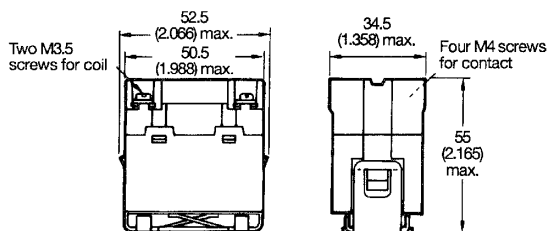

**Terminal arrangement/
Internal connections
(Top view)**






**Mounting holes
(Bottom view)**






* E bracket must be ordered separately.



**G7L-1A-BJ
(E bracket Attached)***

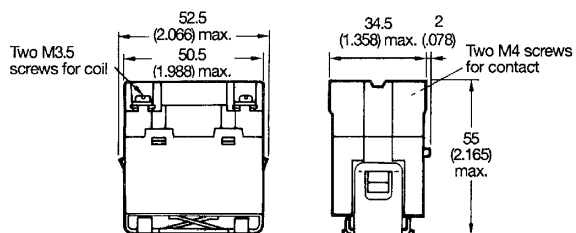




**G7L-2A-BJ
(E bracket Attached)***

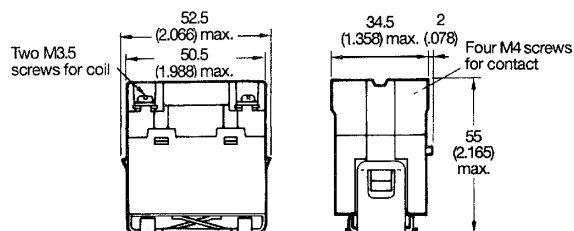

G7L-1A-BUB

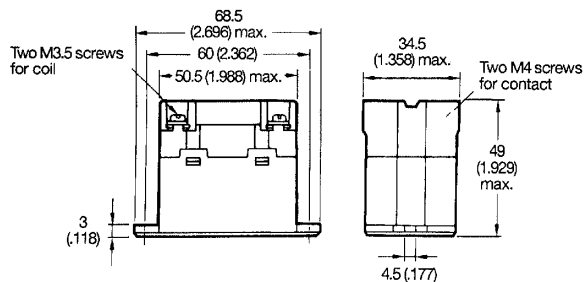


G7L-2A-BUB

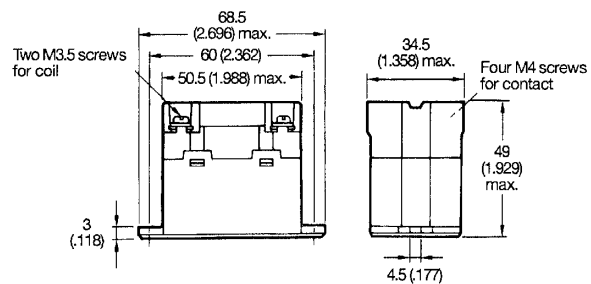


* E bracket must be ordered separately.

Unit: mm (inch)


G7L-1A-BUBJ

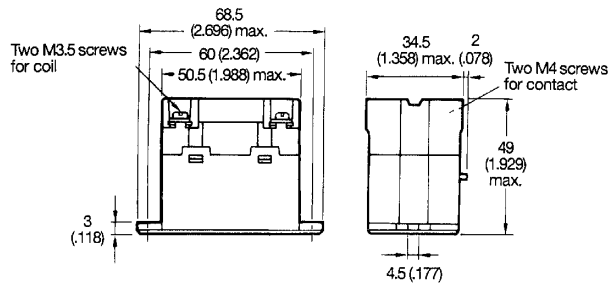


**Terminal arrangement/
Internal connections**
(Top view)




Mounting holes
(Bottom view)




G7L-2A-BUBJ

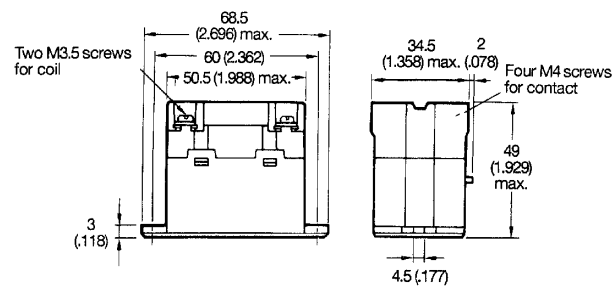


**Terminal arrangement/
Internal connections**
(Top view)




Mounting holes
(Bottom view)




G7L-1A-P

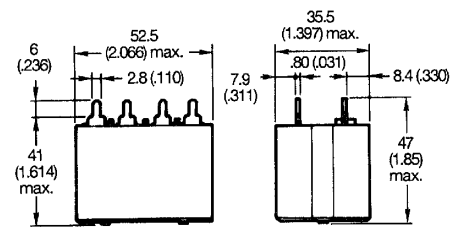


**Terminal arrangement/
Internal connections**
(Top view)




Mounting holes
(Bottom view)




G7L-2A-P

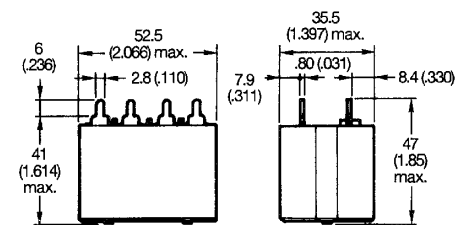

**Terminal arrangement/
Internal connections**
(Top view)




Mounting holes
(Bottom view)




Accessories


E bracket R99-07G5D

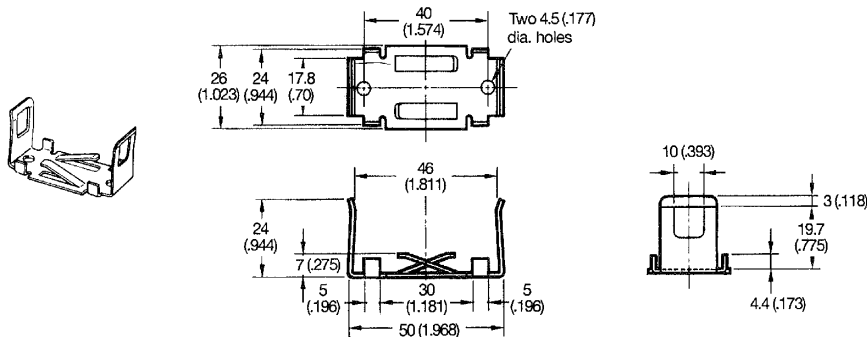


Mounting holes (Bottom view)




Adaptor P7LF-D

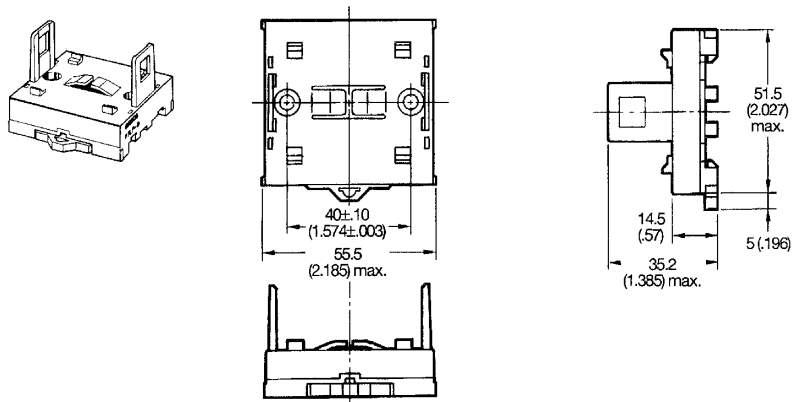


Mounting holes (Bottom view)



Front connecting socket P7LF-06

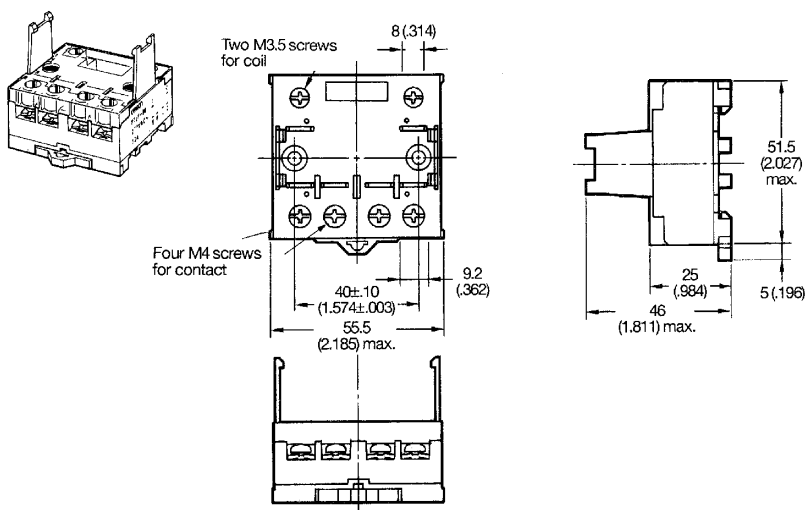


Mounting holes (Bottom view)



- Note:** 1. To protect against electric shock, use the P7LF-C cover on terminals.
2. P7LF-C cover is supplied with P7LF-06 socket.

Unit: mm (inch)


Cover
P7LF-C

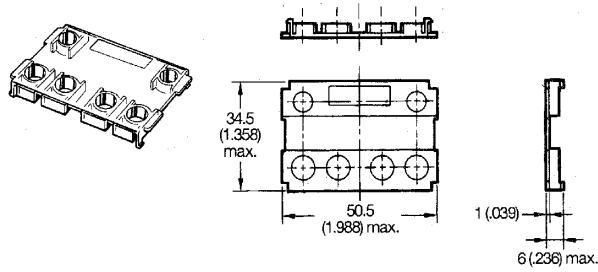


Note: P7LF-C cover is supplied with P7LF-06 socket.

Mounting track

PFP-100N, PFP-50N

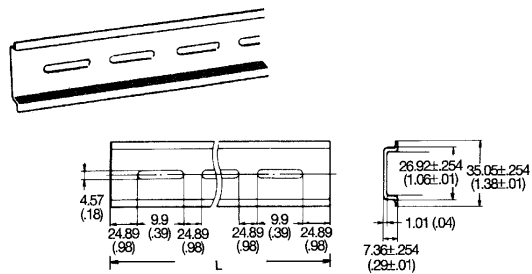

PFP-100N2

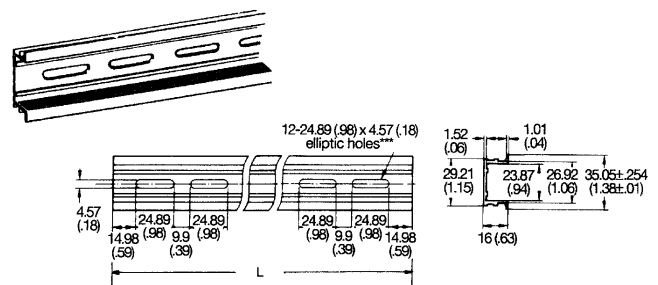

Note: 1. It is recommended that a panel thickness of 1.60 to 2.00 mm (0.06 to 0.08 in) be used.

2. L = Length


PFP-100N L = 1 m (39.00 in)

PFP-50N L = 50 cm (19.60 in)

PFP-100N2 L = 1 m (39.00 in)


End plate

PFP-M

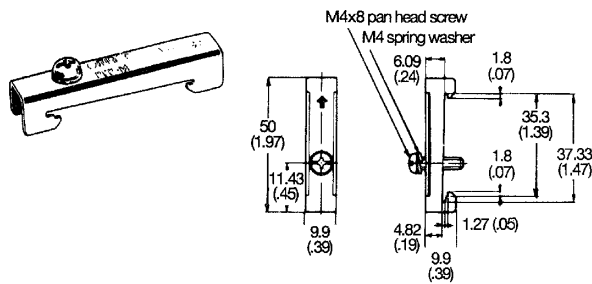

Spacer

PFP-S

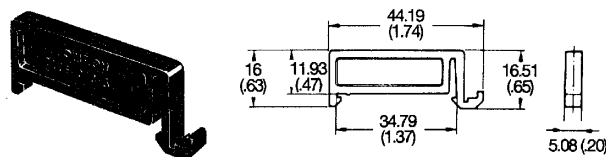

■ Approvals

UL recognized type (File No. E41643)/CSA certified type (File No. LR35535)

| Type | Contact form | Terminal type | Contact ratings |
|--|--------------|---------------|--|
| G7L-1A-T-CB G7L-1A-TJ-CB G7L-1A-TUB-CB G7L-1A-TUBJ-CB | SPST-NO | Quick-connect | 30 A, 277 VAC, General Use, 100,000 c 1.5 kW, 120 VAC, Tungsten 1.5 HP, 120 VAC 3 HP, 240/265/277 VAC, 100,000 c |
| G7L-1A-B-CB G7L-1A-BJ-CB G7L-1A-BUB-CB G7L-1A-BUBJ-CB | | Screw | 20 FLA/120 LRA, 120 VAC, 30,000 c 17 FLA/102 LRA, 277 VAC, 30,000 c TV-10, 120 VAC 20 A (2.4 kW), 120 VAC, Tungsten |
| G7L-1A-P-CB | | PCB | 20 A, (4.8 kW), 240 VAC, Tungsten 6,000 20 A, 277 VAC, Ballast 10,000 c |
| G7L-2A-T-CB G7L-2A-TJ-CB G7L-2A-TUB-CB G7L-2A-TUBJ-CB | DPST-NO | Quick-connect | 20 A, 277 VAC, Ballast 10,000 c |
| G7L-2A-B-CB G7L-2A-BJ-CB G7L-2A-BUB-CB G7L-2A-BUBJ-CB | | Screw | |
| G7L-2A-P-CB | | PCB | |

TÜV (File No. R9251551)

| Type | Contact form | Coil ratings | Terminal type | Contact ratings |
|--|--------------|---|---------------|---|
| G7L-1A-T-CB G7L-1A-TJ-CB G7L-1A-TUB-CB G7L-1A-TUBJ-CB | SPST-NO | 6, 12, 24, 48, 100, 110, 200, 220 VDC | Quick-connect | 25 A, 240 VAC, (cosφ = 1) 25 A, 240 VAC, (cosφ = 0.4) |
| G7L-1A-B-CB G7L-1A-BJ-CB G7L-1A-BUB-CB G7L-1A-BUBJ-CB | | | Screw | 30 A, 240 VAC, (cosφ = 1) 25 A, 240 VAC, (cosφ = 0.4) 30 A, 240 VAC, (cosφ = 0.4) |
| G7L-1A-P-CB | | | | PCB |
| G7L-2A-T-CB G7L-2A-TJ-CB G7L-2A-TUB-CB G7L-2A-TUBJ-CB | DPST-NO | 12, 24, 50, 100/120, 200/240 VAC | Quick-connect | 25 A, 240 VAC, (cosφ = 1) 25 A, 240 VAC, (cosφ = 0.4) |
| G7L-2A-B-CB G7L-2A-BJ-CB G7L-2A-BUB-CB G7L-2A-BUBJ-CB | | | Screw | 25 A, 240 VAC, (cosφ = 1) 25 A, 240 VAC, (cosφ = 0.4) |
| G7L-2A-P-CB | | | | PCB |

VDE recognized type (Licence no. 1530 UG)

Note: 1. Please consult OMRON for details of VDE approvals.

2. The G7L relay conforms to the following standards: Electrical safety: DIN IEC 255 Teil 1-00/DIN VDE 0435 Teil 201/05. 83
DIN VDE 0435 Teil 201 A1/05. 90
DIN IEC 255 Teil 0-20/DIN VDE 0435 Teil 120/10. 81
DIN EN 60 950/VDE 0805/11. 93

EMC: prEN 50082-2, EN 55022

3. The rated values approved by each of the safety standards (e.g., UL and CSA) may be different from the performance characteristics individually defined in this catalog.
4. In the interest of product improvement, specifications are subject to change.

Precautions

■ Handling

- To preserve initial performance, do not drop or otherwise subject the power relay to shock.
- The case is not designed to be removed during normal handling and operation. Doing so may affect performance.
- Use the power relay in a dry environment free from excessive dust, SO₂, H₂S, or organic gas.
- Do not allow a voltage greater than the maximum allowable coil voltage to be applied continuously.
- Do not use the power relay outside of specified voltages and currents.
- Do not allow the ambient operating temperature to exceed the specified limit.

■ Installation

- Although there are not specific limits on the installation site, it should be as dry and dust-free as possible.
- PCB terminal-equipped relays weigh approximately 100 g. Be sure that the PCB is strong enough to support them. We recommend dual-side through-hole PCBs to reduce solder cracking from heat stress.
- Quick-connect terminals can be connected to fast on receptacle #250 and positive-lock connectors.
- Allow suitable slack on leads when wiring, and do not subject the terminals to excessive force.

■ Cleaning PCB Terminals

- PCB terminals have semi-sealed construction which prevents flux from entering the relay base. It is recommended that the user should apply a tape seal over the vent hole prior to wave soldering or cleaning. The tape should then be removed after processing.


■ Applications

- Compressors for package air conditioners and heater switching controllers
- Switching controllers for power tools or motors
- Power controllers for water heaters
- Power controllers for dryers
- Lamp control, motor drivers, and power supply switching in copy machines, facsimiles, and other OA equipment
- Lighting controllers
- Power controllers for packers or food processing equipment
- Magnetron control in microwaves

■ Operating Coil

- As a rule, either a battery or a DC power supply with a maximum 5% ripple is used for the operating voltage for DC relays. Before using a rectified AC supply, confirm that the ripple is not greater than 5%. Ripple greater than this can lead to variations in the operating and reset voltages.

As excessive ripple can generate beats, the insertion of a smoothing capacitor is recommended as shown below.

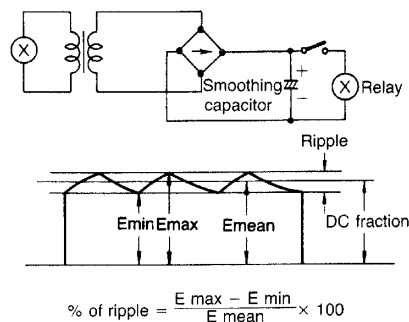

$$\% \text{ of ripple} = \frac{E_{\text{max}} - E_{\text{min}}}{E_{\text{mean}}} \times 100$$

E max: Max. ripple
E min: Min. ripple
E mean: Mean DC value

- When driving a transistor, check the leakage current and connect a bleeder resistor if necessary.
- Momentary voltage drops on coil input voltage should not exceed one second duration after contact mating with no shock or vibration.

Terms and Conditions of Sale

1. Offer; Acceptance. These terms and conditions (these "Terms") are deemed part of all quotations, acknowledgments, invoices, purchase orders and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronic Components LLC ("Seller"). Seller hereby objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. Prices; Payment. All prices stated are current, subject to change without notice by Seller. Buyer agrees to pay the price in effect at time of shipment. Payments for Products received are due net 30 days unless otherwise stated in the invoice.
3. Discounts. Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Seller's payment terms and (ii) Buyer has no past due amounts owing to Seller.
4. Currencies. If the prices quoted herein are in a currency other than U.S. dollars, Buyer shall make remittance to Seller at the then current exchange rate most favorable to Seller and which is available on the due date; provided that if remittance is not made when due, Buyer will convert the amount to U.S. dollars at the then current exchange rate most favorable to Seller available during the period between the due date and the date remittance is actually made.
5. Governmental Approvals. Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
6. Taxes. All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Seller or required to be collected directly or indirectly by Seller for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Seller.
7. Financial. If the financial position of Buyer at any time becomes unsatisfactory to Seller, Seller reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Seller may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
8. Cancellation; Etc. Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Seller fully against all costs or expenses arising in connection therewith.
9. Force Majeure. Seller shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
10. Shipping; Delivery. Unless otherwise expressly agreed in writing by Seller:
 1. Shipments shall be by a carrier selected by Seller;
 2. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 3. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Seller), at which point title to and all risk of loss of the Products shall pass from Seller to Buyer, provided that Seller shall retain a security interest in the Products until the full purchase price is paid by Buyer;
 4. Delivery and shipping dates are estimates only.
 5. Seller will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
11. Claims. Any claim by Buyer against Seller for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Seller within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Seller in the condition claimed.
12. Warranties. (a) Exclusive Warranty. Seller's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Seller (or such other period expressed in writing by Seller). Seller disclaims all other warranties, express or implied. (b) Limitations. SELLER MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Seller further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Seller's sole obligation hereunder shall be to replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product or, at Seller's election, to repay or credit Buyer an amount equal to the purchase price of the Product; provided that in no event shall Seller be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Seller's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Seller before shipment. Seller shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies, or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing are not to be construed as an amendment to the above warranty.
13. Limitation on Liability; Etc. SELLER SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Seller exceed the individual price of the Product on which liability is asserted.
14. Indemnities. Buyer shall indemnify and hold harmless Seller, its affiliates and its employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Seller is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Seller and defend or settle any action brought against Seller to the extent that it is based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
15. Property; Confidentiality. The intellectual property embodied in the Products is the exclusive property of Seller and its affiliates and Buyer shall not attempt to duplicate it in any way without the written permission of Seller. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling supplied by Seller to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
16. Miscellaneous. (a) Waiver. No failure or delay by Seller in exercising any right and no course of dealing between Buyer and Seller shall operate as a waiver of rights by Seller. (b) Assignment. Buyer may not assign its rights hereunder without Seller's written consent. (c) Law. These Terms are governed by Illinois law (without regard to conflict of law principles). Federal and state courts in Illinois shall have exclusive jurisdiction for any dispute hereunder. (d) Amendment. These Terms constitute the entire agreement between Buyer and Seller relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) Severability. If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) Setoff. Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) Definitions. As used herein, "including" means "including without limitation".

Certain Precautions on Specifications and Use

1. **Suitability for Use.** Seller shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in Buyer's application or use of the Product. At Buyer's request, Seller will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
 - (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
 - (ii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - (iii) Use in consumer products or any use in significant quantities.
 - (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Seller shall not be responsible for the user's programming of a programmable product, or any consequence thereof.
3. **Performance Data.** Performance data given in this publication is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Seller's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to Seller's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Seller representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** The information in this publication has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors, or omissions.
6. **RoHS Compliance.** Where indicated, our products currently comply, to the best of our knowledge as of the date of this publication, with the requirements of the European Union's Directive on the Restriction of certain Hazardous Substances ("RoHS"), although the requirements of RoHS do not take effect until July 2006. These requirements may be subject to change. Please consult our website for current information.

Complete "Terms and Conditions of Sale" for product purchase and use are on Omron's website at www.components.omron.com – under the "About Us" tab, in the Legal Matters section.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON®

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON CANADA, INC.

885 Milner Avenue
Toronto, Ontario M1B 5V8

416-286-6465

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Canada - <http://www.omron.ca>