



**Magnecraft**  
Your Contact for Industrial Relays

relay  
solutions

PRODUCTS

COMPANY

SALES CHANNELS

SEARCH

LIBRARY

**Features & Benefits:**

[Plug-In & Power Relays](#)

[Sockets](#)

[Accessories](#)

[Solid State Relays](#)

[Time Delay & Sensor Relays](#)

[Power Relays](#)

[Latching & Sequencing Relays](#)

[Printed Circuit Board Relays](#)

**-- Quick Search**

--

Search Distributor Inventory & Buy Online

Locate A Distributor

Cross-Reference A Part Number

Product Search

Select one of the Quick Search categories to conduct a search

[3D Modeling & 2D Drawings](#)

[Order Solutions Guide](#)

[Order Free Samples](#)

[Tell Us How We're Doing](#)

[RoHS Compliant Products](#)

[All Categories](#) > [Relays](#) > [Solid State](#) > Item # 6340AXXMDS-DC3

**Request Information**

Item # 6340AXXMDS-DC3 Class 6 Solid State Relay / SPST-NO, 40 Amp Rating

[Download PDF](#)

[Email This Page](#)

[Save To Favorites](#)

**Class 6 Solid State Relay / SPST-NO, 40 Amp Rating**


Class 6 Series:

- Hockey puck design
- Finger-safe cover\*
- LED status indicator
- Optically coupled circuitry

\*Available for products up to 40 Amps (AC) and 12 Amps (DC).



[larger image](#)

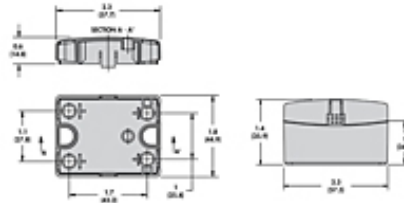

[larger image](#)

**MORE IMAGES**

- [6 Wiring Diagram](#)
- [6 Part Description](#)
- [Max. Ambient Temperature at 40 & 50A](#)


**VIEW CAD DRAWING**

- [Front View](#)
- [Right Side View](#)
- [3D](#)

**DOWNLOADS**

[Catalog PDF\(PDF\)](#)

**Heat Sink**



[SSR-HS-1 Heat Sink](#)

[Specifications](#) · [Output Characteristics](#) · [Input Characteristics](#) · [Performance Characteristics](#) · [Environment](#) · [Miscellaneous Characteristics](#) · [Product Certifications](#)

**Specifications**

|                       |              |
|-----------------------|--------------|
| Component Type        | Solid State  |
| Mounting Type         | Panel Mount  |
| Superceding Part No.  | W6240DDX-1   |
| Contact Rating        | 40 A         |
| Contact Configuration | SPST-NO      |
| Output Voltage Range  | 3 to 200 VDC |
| Load Type             | DC           |
| Switching Type        | DC Switching |

**Output Characteristics**

|  |              |
|--|--------------|
| Switching Device                       | MOSFET       |
| Switching Voltage                      | 3 to 200 VDC |
| Min. Load Current to Maintain On       | 20 mA        |
| Non-Repetitive Surge Current (1 cycle) | 90 A         |
| Max. Off State Leakage Current [rms]   | 8 mA         |
| Typical On State Voltage Drop [rms]    | 1.6 V        |
| Max. On State Voltage Drop [rms]       | 2.83         |

#### Input Characteristics

|                             |             |
|-----------------------------|-------------|
| Voltage Range               | 3 to 32 VDC |
| Must Release Voltage        | 1 VDC       |
| Nominal Input Impedance     | 1000 Ohm    |
| Reverse Polarity Protection | No          |

#### Performance Characteristics

|  |             |
|--|-------------|
| Electrical Life (UL508), Operations at Rated Current (Resistive) | 100000      |
| Mechanical Life, Unpowered                                       | 10000000    |
| Operating Time (Response Time) - On                              | 600 $\mu$ s |
| Operating Time (Response Time) - Off                             | 2.6 ms      |
| Rated Insulation Voltage, Input to Output                        | 2500 VAC    |
| Dielectric Strength, Terminals to Chassis                        | 2500 VAC    |

#### Environment

|   |                |
|---|----------------|
| Ambient Air Temperature around the Device - Storage   | -40 to +100 °C |
| Ambient Air Temperature around the Device - Operation | -40 to +80 °C  |
| Degree of Protection                                  | IP 20          |

#### Miscellaneous Characteristics

|                                       |           |
|---------------------------------------|-----------|
| Thermal Resistance (Junction to Case) | 1.06 °C/W |
| LED Input                             | Green     |
| Input Terminal                        | M3.5      |
| Output Terminal                       | M4        |

#### Product Certifications

|                  |                 |
|------------------|-----------------|
| Agency Approvals | UL<br>CE<br>CSA |
|------------------|-----------------|

## Solid State Relays – Application Data

**Definition:** A SSR (solid state relay) can perform many tasks that an EMR (electromechanical relay) can perform. The SSR differs in that it has no moving mechanical parts within it. It is essentially an electronic device that relies on the electrical, magnetic and optical properties of semiconductors, and electrical components to achieve its isolation and relay switching function.

**Principle of Operation:** Solid State Relays are similar to electromechanical relays, in that both use a control circuit and a separate circuit for switching the load. When voltage is applied to the input of the SSR, the relay is energized by a light emitting diode. The light from the diode is beamed into a light sensitive semiconductor which, in the case of zero voltage crossover relays, conditions the control circuit to turn on the output solid state switch at the next zero voltage crossover. In the case of nonzero voltage crossover relays, the output solid state switch is turned on at the precise voltage occurring at the time. Removal of the input power disables the control circuit and the solid state switch is turned off when the load current passes through the zero point of its cycle.

**Applications:** Since its introduction the SSR, as a technology, has gained acceptance in many areas, which had previously been the sole domain of the EMR or the Contactor. The major growth areas have come from Industrial Process Control applications; particularly heat/cool temperature control, motors, lamps, solenoids, valves, and transformers. The list of applications for the SSR is almost limitless.

The following are typical examples of SSR applications: industrial automation, electronic appliances, industrial appliances, packaging machines, tooling machines, manufacturing equipment, food equipment, security systems, industrial lighting, fire and security systems, dispensing machines, production equipment, on-board power control, traffic control, instrumentation systems, vending machines, test systems, office machines, medical equipment, display lighting, elevator control, metrology equipment, and entertainment lighting.


INDUSTRIAL  
AUTOMATION



ALARM  
SYSTEMS



ELECTRONIC  
APPLIANCES



INDUSTRIAL  
APPLIANCES



MEDICAL  
EQUIPMENT



PACKING  
MACHINES



TOOLING  
MACHINES



**Advantages:** When used correctly in the intended application, the SSR provides many of the characteristics that are often difficult to find in the EMR; a high degree of reliability, long service life, significantly reduced electromagnetic interference, fast response and high vibration resistance are significant benefits of the SSR. The SSR has no moving parts to wear out or arcing contacts to deteriorate, which are often the primary cause of failure with an EMR.

- Long life (reliability) > 10<sup>9</sup> operations
- Zero voltage turn on, low EMI / RFI
- Shock and Vibration resistant
- Random turn-on, proportional control
- No contact bounce
- Arc-less switching
- No acoustical noise
- Microprocessor compatible
- Fast response
- No moving parts

**Thermal Considerations:** One of the major considerations when using a SSR is properly managing the heat that is generated when switching currents higher than about 5 amps. In this scenario one must mount the base plate of the SSR onto a good heat conductor, typically aluminum; along with utilizing a good thermal transfer medium such as thermal grease or heat transfer pad. Using this technique, the SSR case to heat sink thermal resistance is reduced to a negligible value of 0.1 °C/W.

## Advantages of the Class 6 Solid State Relay

### The Complete System Solution!



Optional Heat Sink  
(SSR-HS-1)  
Section 3 p.20



Optional Thermal Pad  
(SSR-TP-1)  
Section 3 p.21

We at Magnecraft strive to be your one-stop-shop for all of your solid state relay needs. The new line of 6 series solid-state relays give industrial relay users an energy-efficient current switching alternative. Depending on the application, these solid-state relays offer a number of advantages over electromechanical relays, including longer life cycles, less energy consumption and reduced maintenance costs. This is why great care and attention was given when developing the next generation of "Hockey Puck" style SSRs. These new SSRs will be finger-safe, fit a pre-cut heat transfer thermal pad (sold separately) and have the ability to be mounted onto a factory tested pre-drilled and tapped heat sink (sold separately).

Magnecraft's expertise in both SSR design and thermal management enables us to provide customers with a solution to their solid state relay requirements. This solution comes ready-to-use, virtually eliminating in-house assembly and complex heat sink calculations. Furthermore, each SSR, thermal pad (sold separately) and heat sink assembly (sold separately) utilizes the reliability and technology only available in our 6 series solid state relays. These features, coupled with Magnecraft's superior customer service and engineering support team, provide our customers with a level of convenience not easily found in the market today!



Evolut

Legacy


The Class 6 is also available with Blade Terminals.



The new finger-safe Class 6\* "Hockey Puck" Style Solid State Relay (SSR) expands and enhances the current Magnecraft Solid State Relay product line.

This product features a finger-safe cover and LED Status Indicator. The optically coupled circuitry isolates the input from the output to give pure solid state performance. This product carries with it agency certifications from UL, CSA, and CE.

\*Available for products up to 40 Amps (AC Load) and 12 Amps (DC Load).

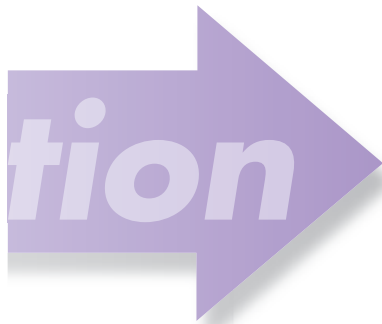

**Finger Safe**  
Protects Operators from live circuits.

**Input Indication**  
Green LED.

**Optically Coupled Circuit**  
NO Interference between separate circuits.

**Solid State Circuitry**  
No Moving Parts Involved.

**Internal Snubber**  
Protects from Transients.

**Panel Mounting**




**New**



**Thermal Pad  
(SSR-TP-1)**  
Section 3 p.21



**Blade Terminals  
DPST-NO**

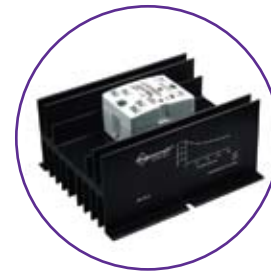

**Heat Sink  
(SSR-HS-1)**  
Section 3 p.20

| 6210AXXTZS-DC3 | 6425BXXAZB-DC3*   | 6312AXXMDS-DC3 | 6325AXXMDS-DC3 | 6340AXXMDS-DC3 |
|----------------|-------------------|----------------|----------------|----------------|
| 6210DTX-1      | 6425DTX-3*        | 6212DDX-1      | 6225DDX-1      | 6240DDX-1      |
| SPST-NO        | DPST-NO           | SPST-NO        | SPST-NO        | SPST-NO        |
| Triac          | Alternistor       | MOSFET         | MOSFET         | MOSFET         |
| 10             | 25                | 12             | 25             | 40             |
| 24....280 AC   | 48....480 AC      | 3....200 DC    | 3....200 DC    | 3....200 DC    |
| Zero Cross     | Zero Cross        | DC Switching   | DC Switching   | DC Switching   |
| 250            | 250               | N/A            | N/A            | N/A            |
| 16             | N/A               | N/A            | N/A            | N/A            |
| 8              | N/A               | N/A            | N/A            | N/A            |
| 120            | 80                | 20             | 20             | 20             |
| 250            | 250               | 27             | 50             | 90             |
| 80             | 80                | N/A            | N/A            | N/A            |
| 10             | 10                | 8              | 8              | 8              |
| 300            | 300               |                |                |                |
| 1.6            | 1.1               | 1.6            | 1.6            | 1.6            |
| 1.6            | 1.6               | 2.83           | 2.83           | 2.83           |
| 300            | 200               | N/A            | N/A            | N/A            |
| <hr/>          |                   |                |                |                |
| 3....32        | 3.5....32         | 3....32        | 3....32        | 3....32        |
| 1 DC           | 1 DC              | 1 DC           | 1 DC           | 1 DC           |
| 1.5 K          | Current Regulator | 1K             | 1K             | 1K             |
| 2              | 16                | 10             | 10             | 10             |
| Yes            | Yes               | No             | No             | No             |
| <hr/>          |                   |                |                |                |
| 8.3            | 8.3               | 300 μs         | 600 μs         | 600 μs         |
| 8.3            | 8.3               | 1              | 2.6            | 2.6            |
| 4000 AC        | 4000 AC           | 4000 AC        | 4000 AC        | 4000 AC        |
| 4000 AC        | 4000 AC           | 2500 AC        | 2500 AC        | 2500 AC        |
| <hr/>          |                   |                |                |                |
| UR, CSA, CE    | UR, CSA, CE       | UR, CSA, CE    | UR, CSA, CE    | UR, CSA, CE    |
| -40...+100     | -40...+100        | -40...+100     | -40...+100     | -40...+100     |
| -40...+80      | -40...+80         | -40...+80      | -40...+80      | -40...+80      |
| IP 20          | IP 20             | IP 20          | IP 20          | IP 20          |
| <hr/>          |                   |                |                |                |
| 1.45           | 1.20              | 1.06           | 1.06           | 1.06           |
| 100 (3.5)      | 100 (3.5)         | 110 (3.9)      | 135 (4.8)      | 135 (4.8)      |
| Green          | Green             | Green          | Green          | Green          |
| M3.5           | 0.187" QC         | M3.5           | M3.5           | M3.5           |
| M4             | 0.250" QC         | M4             | M4             | M4             |
| 1.0            | 1.0               | 1.0            | 1.0            | 1.0            |

\*Blade Terminal

Class 6 Solid State Relays/SPST-NO, SPST-NC, DPST-NO, 10-125 Amp Rating *continued*



**NEW**  
**NEW**  
**NEW**  
**NEW**  
**NEW**







**Screw Terminals**  
SPST-NO



**Blade Terminals**  
DPST-NO

\*Finger-safe safety cover is available for products up to 40 Amps.

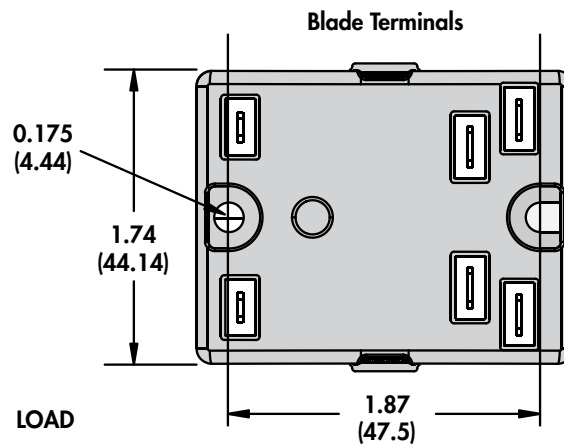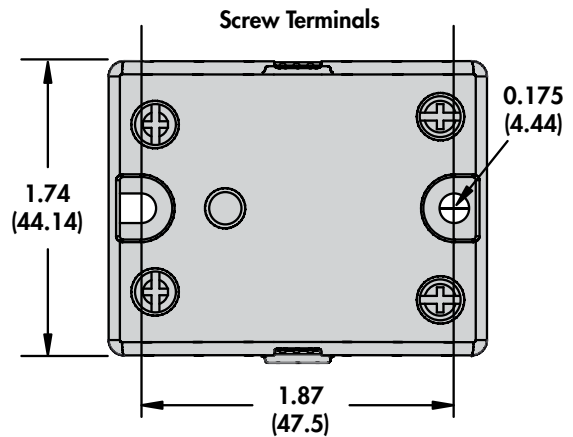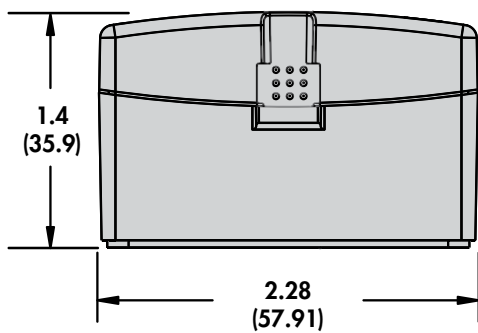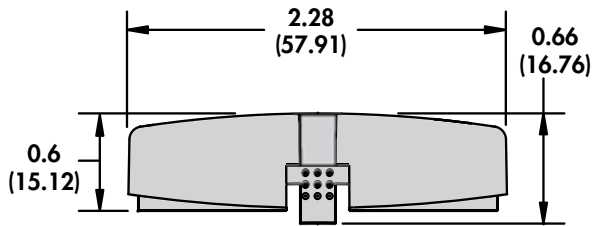


SECTION 4

# Class 6 Solid State Relays/SPST-NO, SPST-NC, DPST-NO, 10-125 Amp Rating *continued*



**NEW**  
**NEW**  
**NEW**  
**NEW**  
**NEW**

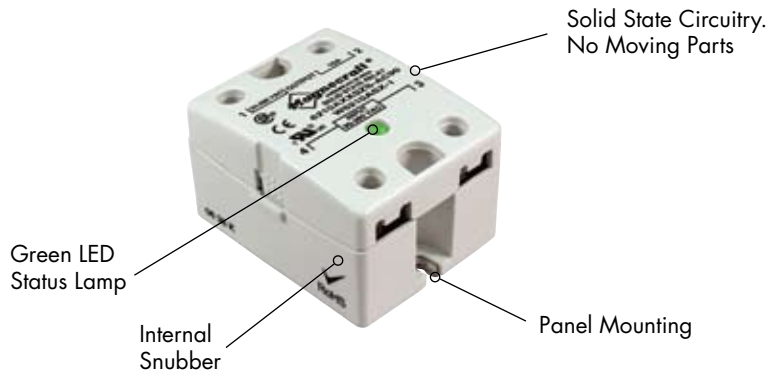

## Standard Part Numbers

**BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED**

| AC Operated, DUAL MARKED        |                    | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|---------------------------------|--------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| <b>New Part #</b>               | <b>Supersedes</b>  |                     | <b>SCR Output</b>    |                       |                |                           |
| <b>6210AXXSZS-AC90</b>          | W6210ASX-1         | 90...280 VAC        | 24...280 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6225AXXSZS-AC90</b>          | W6225ASX-1         | 90...280 VAC        | 24...280 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6240AXXSZS-AC90</b>          | W6240ASX-1         | 90...280 VAC        | 24...280 VAC         | SPST-NO               | Zero Cross     | 40                        |
| 6250AXXSZS-AC90**               | <b>W6250ASX-1</b>  | 90...280 VAC        | 24...280 VAC         | SPST-NO               | Zero Cross     | 50                        |
| 6275AXXSZS-AC90**               | <b>W6275ASX-1</b>  | 90...280 VAC        | 24...280 VAC         | SPST-NO               | Zero Cross     | 75                        |
| <b>6410AXXSZS-AC90</b>          | W6410ASX-1         | 90...280 VAC        | 48...480 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6425AXXSZS-AC90</b>          | W6425ASX-1         | 90...280 VAC        | 48...480 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6440AXXSZS-AC90</b>          | W6440ASX-1         | 90...280 VAC        | 48...480 VAC         | SPST-NO               | Zero Cross     | 40                        |
| 6450AXXSZS-AC90**               | <b>W6450ASX-1</b>  | 90...280 VAC        | 48...480 VAC         | SPST-NO               | Zero Cross     | 50                        |
| 6475AXXSZS-AC90**               | <b>W6475ASX-1</b>  | 90...280 VAC        | 48...480 VAC         | SPST-NO               | Zero Cross     | 75                        |
| 6690AXXSZS-AC90**               | <b>W6690ASX-1</b>  | 90...280 VAC        | 48...600 VAC         | SPST-NO               | Zero Cross     | 90                        |
| 66125AXXSZS-AC90**              | <b>W66125ASX-1</b> | 90...280 VAC        | 48...600 VAC         | SPST-NO               | Zero Cross     | 125                       |
| <b>DC Operated, DUAL MARKED</b> |                    |                     |                      |                       |                |                           |
| <b>New Part #</b>               | <b>Supersedes</b>  |                     |                      |                       |                |                           |
| <b>6210AXXSZS-DC3</b>           | W6210DSX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6225AXXSZS-DC3</b>           | W6225DSX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6240AXXSZS-DC3</b>           | W6240DSX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 40                        |
| 6250AXXSZS-DC3**                | <b>W6250DSX-1</b>  | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 50                        |
| 6275AXXSZS-DC3**                | <b>W6275DSX-1</b>  | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 75                        |
| <b>6410AXXSZS-DC3</b>           | W6410DSX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6425AXXSZS-DC3</b>           | W6425DSX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6440AXXSZS-DC3</b>           | W6440DSX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 40                        |
| 6450AXXSZS-DC3**                | <b>W6450DSX-1</b>  | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 50                        |
| 6475AXXSZS-DC3**                | <b>W6475DSX-1</b>  | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 75                        |
| 6690AXXSZS-DC3**                | <b>W6690DSX-1</b>  | 3...32 VDC          | 48...600 VAC         | SPST-NO               | Zero Cross     | 90                        |
| 66125AXXSZS-DC3**               | <b>W66125DSX-1</b> | 3...32 VDC          | 48...600 VAC         | SPST-NO               | Zero Cross     | 125                       |
| <b>DC Operated, DUAL MARKED</b> |                    |                     |                      |                       |                |                           |
| <b>New Part #</b>               | <b>Supersedes</b>  |                     | <b>TRIAC Output</b>  |                       |                |                           |
| <b>6210AXXTZS-DC3</b>           | W6210DTX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6225AXXTZS-DC3</b>           | W6225DTX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6240AXXTZS-DC3</b>           | W6240DTX-1         | 3...32 VDC          | 24...280 VAC         | SPST-NO               | Zero Cross     | 40                        |
| <b>6210BXXTZB-DC3</b>           | W6210DTX-3         | 3...32 VDC          | 24...280 VAC         | DPST-NO               | Zero Cross     | 10                        |
| <b>6210XXATRS-DC3</b>           | W6210DTX-4         | 3...32 VDC          | 24...280 VAC         | SPST-NC               | Random         | 10                        |
| 6225XXATRS-DC3                  | W6225DTX-4         | 3...32 VDC          | 24...280 VAC         | SPST-NC               | Random         | 25                        |
| 6240XXATRS-DC3                  | W6240DTX-4         | 3...32 VDC          | 24...280 VAC         | SPST-NC               | Random         | 40                        |
| <b>6410AXXTZS-DC3</b>           | W6410DTX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 10                        |
| <b>6425AXXTZS-DC3</b>           | W6425DTX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 25                        |
| <b>6440AXXTZS-DC3</b>           | W6440DTX-1         | 3...32 VDC          | 48...480 VAC         | SPST-NO               | Zero Cross     | 40                        |
| <b>DC Operated, DUAL MARKED</b> |                    |                     |                      |                       |                |                           |
| <b>New Part #</b>               | <b>Supersedes</b>  |                     | <b>MOSFET Output</b> |                       |                |                           |
| <b>6312AXXMDS-DC3</b>           | W6212DDX-1         | 3...32 VDC          | 3...200 VDC          | SPST-NO               | Random         | 12                        |
| 6325AXXMDS-DC3**                | <b>W6225DDX-1</b>  | 3...32 VDC          | 3...200 VDC          | SPST-NO               | Random         | 25                        |
| 6340AXXMDS-DC3**                | <b>W6240DDX-1</b>  | 3...32 VDC          | 3...200 VDC          | SPST-NO               | Random         | 40                        |

\*\*Only Legacy (superceding) part is currently available.

SECTION 4