


Products | The Max Clip System<sup>™</sup> | Search Result


#### 78010

This part is in stock!								
Inventory Snapshot:			22.4 feet* (Last Updated February 18, 2009)					
*Current inventory on hand, listed in FEET. Due to fluctuating demand for material, contact your local sales rep to confirm availability, specifically for production volumes.								
¥	Part	Thermal Resis	tanco	Width	Height	Surface Area	Weight	Part

	Part Number	Thermal Resistance °C/W at 98.4in length	Width in	Height in	Surface Area in/in		Part Class
Ш	78010	0.33	1.34	2.95	37.1	1.60	Α

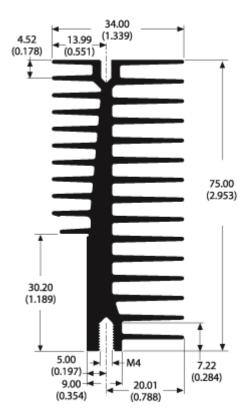


Need a Clip? Select the package to be cooled




Thermal Curves based on 98.400 in length


New Le	ngth 98.400	●in ○mm
(	ngth	

## **Natural Convection**

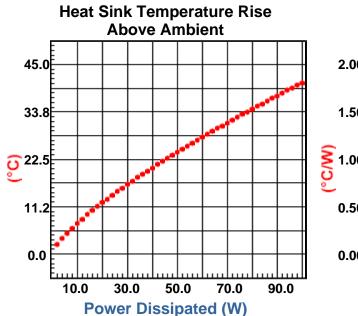



### **Forced Convection**

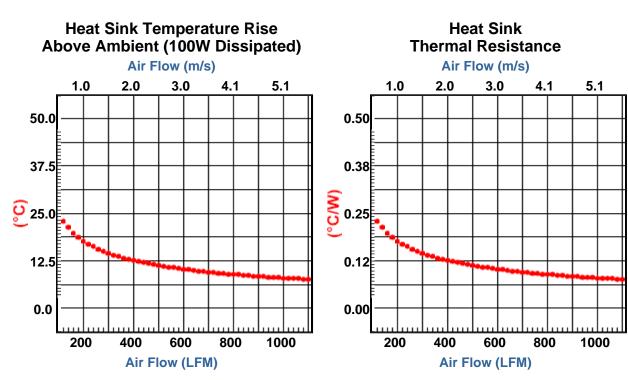

#### **Building a Part Number**

Full Bar Length = 8.20ft

Base Part #	Bar Length	Finish	Length (use zeros for full or half bars)
78010	<u>1</u> Full	<u>F</u> Unfinished	00000
	<u>2</u> Half	<u>F</u> Unfinished	00000
	<u>3</u> Custom	<u>B</u> Black Anodized <u>C</u> Gold Chromate <u>U*</u> Unfinished <u>V</u> AavSHIELD <sup>3</sup>	indicate length <b>in inches</b> to three decimal places; 1 5 2 5 0 = 15.250 "

#### 78010

\*For unfinished extrusions with cut lengths other than half bar, the finish designation is a U.

Standard Aavid Thermalloy parts require all 12 positions to be complete.

### **Non-Standard Extrusions**

Aavid Thermalloy has over 10,000 extrusion profile designs on file, most with the extrusion die already available. These parts have minimum order requirements and longer lead times, but may be cost effective compared to a new design.

\_ \_\_\_ \_\_\_ \_\_\_

# **Customizing & Advanced Capabilities**

We offer several options for those applications which require a more unique solution. Challenge us with your thermal requirements - we can design custom solutions.