


PART NO.	REV
1280 -101 -103	
PROPRIETARY NOTICE This drawing, and the designs and information contained thereon, are the property of Herman H. Smith, Inc. They are not to be reproduced or disclosed to third parties.	

**ELECTRICAL RATING:**  
 Rated voltage - 125 VOLTS  
 Current rating - 15 AMPS

**LEAD WIRES:**  
 AWG #14 (plastic wire leads) & AWG #16 (ground lead), AWM, 600V, 105°C, 6" long with 1/2" strip length or per customer specs.

**HARDWARE:**  
 Spring clip - spring steel, blue tempered

**MOLDED MATERIAL:**  
 Black phenolic or white urea.  
 Other colors available on special order.



CSA FILE NO. LR 9105      UL FILE NO. E18487

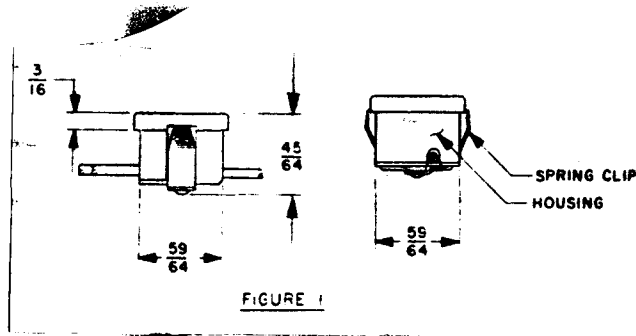


FIGURE 1


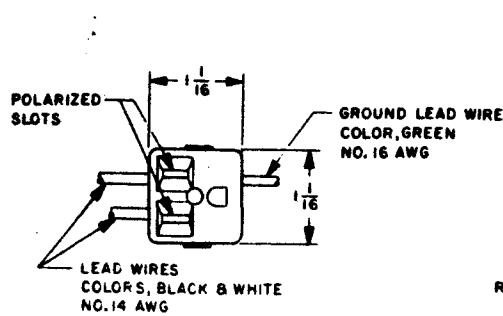


FIGURE 2

UNLESS OTHERWISE SPECIFIED		<b>HHSmith</b>					
Threads are Unified National Series (UNL): External _____ Class 2A Internal _____ Class 2B Threads shall be to gauge fit after plating or other finish Surfaces shall be smooth, and free of tool marks. Break all sharp corners, and remove burrs.		TITLE					
<b>TOLERANCES</b> ALL DIMENSIONS IN: <b>INCHES (MM)</b> Fractions _____ ± 1/64 (0,4) Decimals (.XX) _____ ± .010 (0,2) Decimals (.XXX) _____ ± .005 (0,1) Angles _____ ± 1° Hole Dia _____ + .003 (0,08) Concentricity to center axis _____ - .001 (0,02) _____ - .002 (0,06)		CONVENIENCE OUTLET SCALE: <i>YH</i> STOCK:      BY: <i>SS</i> CHK: <i>FK</i> APP: <i>FK</i> DATE: 12-30-83					
		MATERIAL			FINISH		
		THIRD ANGLE PROJECTION				PART NO.	
						REV.	
						1280	

ASSEM WITH				NEXT ASSY		LTR	DATE	CHANGE
REVISIONS								

BRUNING 40-21 55453