

E3X-DA-S/MDA

OMRON's Next-generation Platform for a Wide Range of Detection

- Features a Power Tuning function that optimizes light reception at the press of a button.
- Combines newly developed 4-element LEDs with an APC circuit to ensure stable, long-term LED performance.
- Utilizes OMRON's innovative wire-saving connector.
- 2-channel models achieve the thinnest profile in the industry, at only 5 mm per channel.
- 2-channel models also offer AND/OR control output.

⚠ Be sure to read *Safety Precautions* on page 15.




Features

Equipped with an Industry's First Power Tuning (Optimum Light Setting) Function

The E3X-DA-S/MDA features a Power Tuning function that optimizes power at the press of a button.

This function easily but securely resolves saturation due to short sensing distances or insufficient incident light due to long sensing distances.


In addition, the response speed does not change as mode selection has tuned the power.

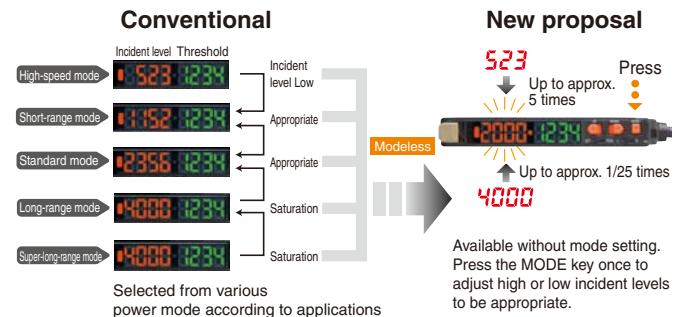

Adoption of Newly Developed 4-Element LEDs and an APC (Auto Power Control) Circuit Achieves Long-term Reliable Detection at the Highest Level in the Industry

The long-term reliable detection at the highest level in the industry is achieved with the innovative APC circuit whose performance is proved by E3X-DA-N series and the newly developed high-power LEDs (4-element type) to ensure super stable, long-term LED performance.


Stable performance is always available without the ON/OFF setting of an APC circuit.

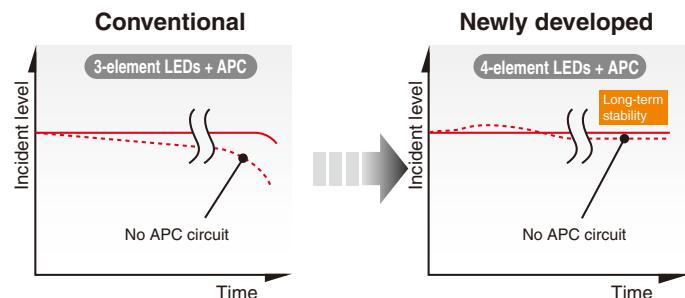

OMRON's Innovative Wire-saving Connector Inherited from the E3X-DA-N

The amplifier units with connectors supply the power to slave connectors via a master connector. This offers three following advantages.

1. Greatly reduced wiring work
2. Improved space usability due to the unnecessary of relay connectors
3. Simple stock management due to the unnecessary of distinction between master and slave for amplifiers

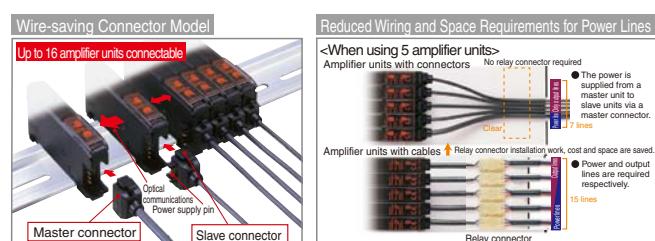

Models available for a wide variety of applications at manufacturing sites

Industry Leading Two Amplifiers Loaded in a Small Body ··· 2-channel models

Two amplifiers are loaded in a 10 mm-wide body.

Space usability can be approximately doubled.


In addition, approximately 40% of the energy can be saved.

(compared to the value per channel of the former model)



Simpler Digital Fiber Sensors ··· Simple & Easy Single-function Models


Required performance and functions have been reviewed from basic points to improve high-performance but hard-to-use digital models. Digital fiber sensors, used in the sense as if using volume type sensors, are added to the basic functions such as an APC function and digital display.

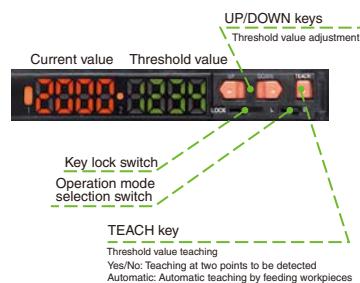

High-speed and High-resolution Analog Output Supports Wide Variety of Applications ··· Advanced Analog Output Models

Analog Control Output

The voltage in the range of 1 to 5 V is output according to the incident level (digital display). Wide variety of applications is possible including positioning control or difference detection with multiple levels.

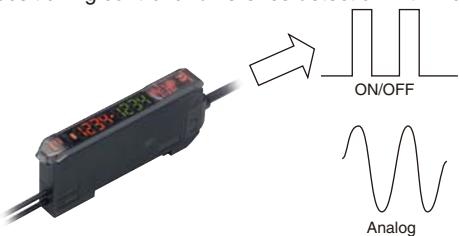




Area Output Function Area Judgment Is Possible ··· Advanced, Twin-output Models

Only one sensor is enough for area judgment for height or others that has required multiple sensors.

Setting two threshold values allows easy output inside and outside range.

High-speed and High Resolution


Detection modes can be switched in accordance with applications. High-speed response of 80 µs (super-high-speed mode) supports the positioning controls that require high-speed control.



Remote Input Function Sensors Controlled from Outside ··· Advanced, External-input Models



Remote settings for teaching/power tuning/light OFF are possible with input signals.

The remote input function meets the diversifying demands such as remote settings made for frequent teaching due to level change corresponding to workpiece change or remote operation check of sensors before operation.



Equipped with an Industry's First ATC Function that Resolves Problems at Manufacturing Sites ··· Advanced ATC Models

OMRON's unique algorithm is equipped to distinguish dust or dirt and the change of workpieces. Automatic correction of threshold values by sensors in accordance with changes prevents malfunctions and improves the operating rates of machines. The ATC function is especially effective for the applications that require high-resolution detection.

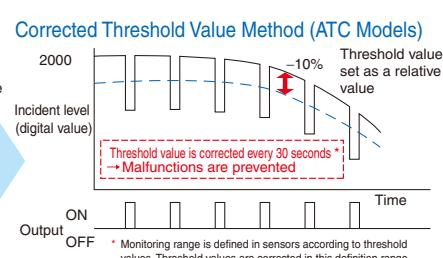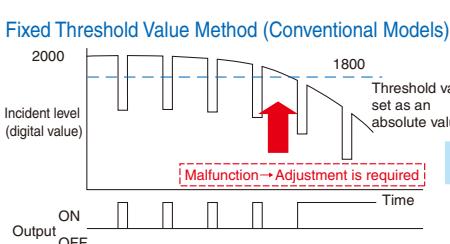

Ordering Information

Amplifier Units

Amplifier Units with Cables

Item	Appearance	Functions	Model	
			NPN output	PNP output
Single-function models		---	E3X-DA11SE-S	E3X-DA41SE-S
Standard models			E3X-DA11-S	E3X-DA41-S
Mark-detecting models (multiple color light sources)	Green LED Blue LED Infrared LED	Timer, Response speed change	E3X-DAG11-S E3X-DAG41-S E3X-DAB11-S E3X-DAB41-S E3X-DAH11-S E3X-DAH41-S	
Advanced models	External-input models	Remote setting, counter, differential operation	E3X-DA11RM-S	E3X-DA41RM-S
	Twin-output models	Area output, self-diagnosis, differential operation	E3X-DA11TW-S	E3X-DA41TW-S
	ATC function models	ATC (Threshold value automatic correction)	E3X-DA11AT-S	E3X-DA41AT-S
	Analog output models	Analog output models	E3X-DA11AN-S	E3X-DA41AN-S
2-channel models		AND/OR output	E3X-MDA11	E3X-MDA41

Amplifier Units with Connectors

Item	Appearance	Functions	Model	
			NPN output	PNP output
Single-function models		---	E3X-DA6SE-S	E3X-DA8SE-S
Standard models			E3X-DA6-S	E3X-DA8-S
Mark-detecting models (multiple color light sources)	Green LED Blue LED Infrared LED	Timer, Response speed change	E3X-DAG6-S E3X-DAG8-S E3X-DAB6-S E3X-DAB8-S E3X-DAH6-S E3X-DAH8-S	
Advanced models	External-input models	Remote setting, counter, differential operation	E3X-DA6RM-S	E3X-DA8RM-S
	Twin-output models	Area output, self-diagnosis, differential operation	E3X-DA6TW-S	E3X-DA8TW-S
	ATC function models	ATC (Threshold value automatic correction)	E3X-DA6AT-S	E3X-DA8AT-S
2-channel models		AND/OR output	E3X-MDA6	E3X-MDA8

Ratings and Specifications

	Light source	Response time	Control output/input			Functions					
			ON/OFF output	Input	Analog output	Power tuning	Timer	Interference prevention	Differential detection	counter	ATC
Single-function models	Red LED	1ms	Only main	---	---	---	---	○	---	---	---
Standard models		50μs to 4ms	Only main	---	---	○	○				
Mark-detecting models	E3X-DA□G-S 3X-DA□B-S E3X-DA□H-S	Green LED Blue LED Infrared LED	50μs to 4ms	Only main	---	○	○	○	---	---	---
Advanced models	Twin-output models External-input models ATC function models	Red LED		Only main Main + sub (2 lines)	○ ---	○	○	○	○	○	---
	Analog output	80μs to 4ms	○	○	○	---	---	○			
		130μs to 4ms	○	○	○	---	---	○			
		80μs to 4ms	Only main	○ (1 line)	○	○	○	---	---	---	
2-channel models	Red LED	130μs to 4ms	Main + main (2 independent lines)	---	---	○	○	○	---	---	---

Amplifier Unit Connectors (Order Separately)

Item	Appearance	Cable length	No. of conductors	Model
Master Connector		2 m	3	E3X-CN11
			4	E3X-CN21
Slave Connector			1	E3X-CN12
			2	E3X-CN22

Combining Amplifier Units and Connectors

Amplifier Units and Connectors are sold separately. Refer to the following tables when placing an order.

Amplifier Unit			Applicable Connector (Order Separately)	
Model	NPN output	PNP output	Master Connector	Slave Connector
Single-function models	E3X-DA6SE-S	E3X-DA8SE-S		
Standard models	E3X-DA6-S	E3X-DA8-S		
Mark-detecting models (multiple color light sources)	E3X-DAG6-S	E3X-DAG8-S	+ E3X-CN11	E3X-CN12
	E3X-DAB6-S	E3X-DAB8-S		
	E3X-DAH6-S	E3X-DAH8-S		
Advanced models	E3X-DA6TW-S	E3X-DA8TW-S	E3X-CN21	
	E3X-DA6RM-S	E3X-DA8RM-S		
	E3X-DA6AT-S	E3X-DA8AT-S		E3X-CN22
2-channel models	E3X-MDA6	E3X-MDA8		

When Using 5 Amplifier Units

Amplifier Units (5 Units) + 1 Master Connector + 4 Slave Connectors

Mobile Console (Order Separately)

Appearance	Model	Remarks
	E3X-MC11-SV2 (model number of set)	Mobile Console with Head, Cable, and AC adapter provided as accessories
	E3X-MC11-C1-SV2	Mobile Console
	E3X-MC11-H1	Head
	E39-Z12-1	Cable (1.5 m)

Note: Use the E3X-MC11-SV2 Mobile Console for the E3X-DA-S/MDA-series Amplifier Units.

The E3X-MC11-SV2 is an upgraded version of the E3X-MC11-S that is fully interchangeable with the older model.

Accessories (Order Separately)

Mounting Bracket

Appearance	Model	Quantity
	E39-L143	1

End Plate

Appearance	Model	Quantity
	PFP-M	1

Ratings and Specifications

Refer to pages 17 to 20 for dimensions.

Amplifier Units

Item	Model	Type	Single-function models	Standard models	Mark-detecting models (multiple color light sources)						
			E3X-DA□SE-S	E3X-DA□-S	E3X-DAG□-S	E3X-DAB□-S	E3X-DAH□-S				
Light source (wavelength)		Red LED (635 nm)			Green LED (525 nm)	Blue LED (470 nm)	Infrared LED (870nm)				
Power supply voltage		12 to 24 VDC ±10%, ripple (p-p) 10% max.									
Power consumption		960 mW max. (current consumption: 40 mA max. at power supply voltage of 24 VDC)									
Control output		Load power supply voltage: 26.4 VDC; NPN/PNP open collector; load current: 50 mA max.; residual voltage: 1 V max.									
Protection circuits		Reverse polarity for power supply connection, output short-circuit									
Response time	Super-high-speed mode	--	Operate: 48 µs, reset: 50 µs *1, *2								
	High-speed mode	--	Operate/reset: 250 µs								
	Standard mode	Operate or reset: 1 ms									
	High-resolution mode	--	Operate or reset: 4 ms								
Sensitivity setting		Teaching or manual method									
Functions	Power tuning	--	Light emission power and reception gain, digital control method								
	Timer function	--	Select from OFF-delay, ON-delay, or one-shot timer. 1 ms to 5 s (1 to 20 ms set in 1-ms increments, 20 to 200 ms set in 10-ms increments, 200 ms to 1 s set in 100-ms increments, and 1 to 5 s set in 1 s-increments)								
	Automatic power control (APC)	High-speed control method for emission current									
	Zero-reset	--	Negative values can be displayed. (Threshold value is shifted.)								
	Initial reset	Settings can be returned to defaults as required.									
	Mutual interference prevention	Possible for up to 10 Units *3									
Display		Operation indicator (orange)	Operation indicator (orange), Power Tuning indicator (orange)								
Digital display		incident level + threshold	Select from incident level + threshold or other 6 patterns								
Display orientation		--	Switching between normal/reversed display is possible.								
Ambient illumination (Receiver side)		Incandescent lamp: 10,000 lux max. Sunlight: 20,000 lux max.									
Ambient temperature range		Operating: Groups of 1 to 2 Amplifiers: -25°C to 55°C Groups of 3 to 10 Amplifiers: -25°C to 50°C Groups of 11 to 16 Amplifiers: -25°C to 45°C Storage: -30°C to 70°C (with no icing or condensation)									
Ambient humidity range		Operating and storage: 35% to 85% (with no condensation)									
Insulation resistance		20 MΩ min. (at 500 VDC)									
Dielectric strength		1,000 VAC at 50/60 Hz for 1 minute									
Vibration resistance		Destruction: 10 to 55 Hz with a 1.5-mm double amplitude for 2 hrs each in X, Y and Z directions									
Shock resistance		Destruction: 500 m/s², for 3 times each in X, Y and Z directions									
Degree of protection		IEC 60529 IP50 (with Protective Cover attached)									
Connection method		Pre-wired or amplifier unit connector									
Weight (packed state)		Pre-wired model: Approx. 100 g, Amplifier unit connector model: Approx. 55 g									
Materials	Case	Polybutylene terephthalate (PBT)									
	Cover	Polycarbonate (PC)									
Accessories		Instruction manual									

*1. Communications are disabled if the detection mode is selected during super-high-speed mode, and the communications functions for mutual interference prevention and the Mobile Console will not function.

*2. PNP output is as follows: Operate: 53 µs, reset: 55 µs.

*3. Mutual interference prevention can be used for only up to 6 Units if power tuning is enabled.

Item	Type Model	Advanced models				2-channel models
		External input models E3X-DA□RM-S	Twin output models E3X-DA□TW-S	ATC function models E3X-DA□AT-S	Analog output models E3X-DA□AN-S	
Light source (wavelength)		Red LED (635 nm)				
Power supply voltage		12 to 24 VDC ±10%, ripple (p-p) 10% max.				
Power consumption		1,080mW max. (current consumption: 45 mA max. at power supply voltage of 24 VDC)				
Control output	ON/OFF output	Load power supply voltage: 26.4 VDC; NPN/PNP open collector; load current: 50 mA max.; residual voltage: 1 V max.				
Control output	Analog output	---	---	Control output Voltage output: 1 to 5 VDC (Connection load 10 kΩ min.) Temperature characteristics 0.3%F.S./°C Response speed/repeat accuracy Super-high-speed mode: 80 µs/1.5%F.S. High-speed mode: 250 µs/1.5%F.S. Standard mode: 1 ms/1%F.S. High-resolution mode: 4 ms/0.75%F.S.	---	
Protection circuits		Reverse polarity for power supply connection, output short-circuit				
Response time	Super-high-speed mode	Operate: 48 µs, reset: 50 µs *1, *2, *3	Operate or reset: 80 µs *1	Operate or reset: 130 µs *1	Operate or reset: 80 µs *1	Operate or reset: 130 µs *1, *4
	High-speed mode	Operate or reset: 250 µs				Operate or reset: 450 µs
	Standard mode	Operate or reset: 1ms				
	High-resolution mode	Operate or reset: 4ms				
Sensitivity setting		Teaching or manual method				
Functions	Power tuning	Light emission power and reception gain, digital control method				
	Differential detection	Switchable between single edge and double edge detection mode Single edge: Can be set to 250 µs, 500 µs, 1 ms, 10 ms, or 100 ms. Double edge: Can be set to 500 µs, 1 ms, 2 ms, 20 ms, or 200 ms.			---	---
	Timer function	Select from OFF-delay, ON-delay, or one-shot timer. 1 ms to 5 s (1 to 20 ms set in 1-ms increments, 20 to 200 ms set in 10-ms increments, 200 ms to 1 s set in 100-ms increments, and 1 to 5 s set in 1 s-increments)				
	Automatic power control (APC)	High-speed control method for emission current				
	Zero-reset	Negative values can be displayed. (Threshold value is shifted.)				
	Initial reset	Settings can be returned to defaults as required.				
	Mutual interference prevention	Possible for up to 10 Units *5			Possible for up to 9 Units (18 channels) *6	
	Counter	Switchable between up counter and down counter. Set count: 0 to 9,999,999			---	
	I/O setting	External input setting (Select from teaching, power tuning, zero reset, light OFF, or counter reset.)	Output setting (Select from channel 2 output, area output, or self-diagnosis.)	Output setting (Select from channel 2 output, area output, self-diagnosis output, or ATC error output)	Analog output setting (offset voltage adjustable)	Output setting (Select from channel 2 output, AND, OR, leading edge sync, falling edge sync, or differential output)
Display		Operation indicator (orange), Power Tuning indicator (orange)	Operation indicator for channel 1 (orange), Operation indicator for channel 2 (orange)	Operation indicator (orange), Power Tuning indicator (orange)	Operation indicator for channel 1 (orange), Operation indicator for channel 2 (orange)	Operation indicator for channel 1 (orange), Operation indicator for channel 2 (orange)

*1. Communications are disabled if the detection mode is selected during super-high-speed mode, and the communications functions for mutual interference prevention and the Mobile Console will not function.

*2. PNP output is as follows: Operate: 53 µs, reset: 55 µs.

*3. When counter is enabled: 80 µs for operate and reset respectively.

*4. When differential output is selected for the output setting, the second channel output is 200 µs for operation and reset respectively.

*5. Mutual interference prevention can be used for only up to 6 Units if power tuning is enabled.

*6. Mutual interference prevention can be used for up to 5 Units (10 channels) if power tuning is enabled.

Item	Type Model	Advanced models				2-channel models E3X-MDA			
		E3X-DA□RM-S	E3X-DA□TW-S	E3X-DA□AT-S	E3X-DA□AN-S				
Digital display	Select from incident level + threshold or other 7 patterns	Select from incident level + threshold or other 6 patterns			Select from incident level for channel 1 + incident level for channel 2 or other 7 patterns				
Display orientation	Switching between normal/reversed display is possible.								
Ambient illumination (Receiver side)	Incandescent lamp: 10,000 lux max. Sunlight: 20,000 lux max.								
Ambient temperature range	Operating: Groups of 1 to 2 Amplifiers: -25°C to 55°C Groups of 3 to 10 Amplifiers: -25°C to 50°C Groups of 11 to 16 Amplifiers: -25°C to 45°C Storage: -30°C to 70°C (with no icing or condensation)								
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)								
Insulation resistance	20 MΩ min. (at 500 VDC)								
Dielectric strength	1,000 VAC at 50/60 Hz for 1 minute								
Vibration resistance	Destruction: 10 to 55 Hz with a 1.5-mm double amplitude for 2 hrs each in X, Y and Z directions								
Shock resistance	Destruction: 500 m/s ² , for 3 times each in X, Y and Z directions								
Degree of protection	IEC 60529 IP50 (with Protective Cover attached)								
Connection method	Pre-wired or amplifier unit connector								
Weight (packed state)	Pre-wired model: Approx. 100 g, Amplifier unit connector model: Approx. 55 g								
Materials	Case	Polybutylene terephthalate (PBT)							
	Cover	Polycarbonate (PC)							
Accessories	Instruction manual								

Amplifier Unit Connectors

Item	Model	E3X-CN11/21/22	E3X-CN12
Rated current	2.5 A		
Rated voltage	50 V		
Contact resistance	20 mΩ max. (20 mVDC max., 100 mA max.) (The figure is for connection to the Amplifier Unit and the adjacent Connector. It does not include the conductor resistance of the cable.)		
No. of insertions	Destruction: 50 times (The figure for the number of insertions is for connection to the Amplifier Unit and the adjacent Connector.)		
Materials	Housing	Polybutylene terephthalate (PBT)	
	Contacts	Phosphor bronze/gold-plated nickel	
Weight (packed state)	Approx. 55 g	Approx. 25 g	

Mobile Console

Item	Model	E3X-MC11-SV2
Applicable Sensors	E3X-DA-S E3X-MDA E3C-LDA E2C-EDA	
Power supply voltage	Charged with AC adapter	
Connection method	Connected via adapter	
Weight (packed state)	Approx. 580 g (Console only: 120 g)	
Refer to <i>Instruction Manual</i> provided with the Mobile Console for details.		

Sensing Distance
Through-beam Models

(Unit: mm)

Type	Model	E3X-DA□-S				E3X-MDA□				
		High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	
Standard models	Flexible (new standard)	E32-T11R/E32-T12R/E32-T15XR/ E32-TC200BR(B4R)	700	530	350	140	450	350	230	140
		E32-T14LR/E32-T15YR/E32-T15ZR	270	210	130	50	170	130	85	50
		E32-T21R/E32-T22R/E32-T222R/ E32-T25XR/E32-TC200FR(F4R)	160	130	75	30	100	75	50	30
		E32-T24R/E32-T25YR/E32-T25ZR	60	50	25	10	35	27	18	10
	Standard	E32-TC200/E32-T12/E32-T15X/ E32-TC200B(B4)	1,000	760	500	200	650	500	330	200
		E32-T14L/E32-T15Y/E32-T15Z	600	460	300	120	390	300	200	120
		E32-TC200A	900	680	450	180	580	450	300	180
		E32-TC200E/E32-T22/E32-T222/ E32-T25X/E32-TC200F(F4)	270	220	125	50	170	130	85	50
		E32-T24/E32-T25Y/E32-T25Z	160	130	75	30	100	70	45	30
	Break-resistant	E32-T11/E32-T12B/E32-T15XB	900	680	450	180	580	450	300	180
		E32-T21/E32-T221B/E32-T22B	240	200	110	45	150	110	70	45
		E32-T25XB	180	150	85	35	125	95	60	35
	Fluorine coating	E32-T11U	900	680	450	180	580	450	300	180
Special-beam models	Long-distance, high power	E32-T17L	20,000*1	20,000*1	10,000	4,000	13,000	10,000	6,500	4,000
		E32-TC200 + E39-F1	4,000*2	4,000*2	2,600	1,500	4,000	3,700	2,400	1,500
		E32-T11R + E39-F1	4,000*2	3,700	2,400	970	3,100	2,400	1,600	970
		E32-T11 + E39-F1	4,000*2	3,600	2,300	930	3,000	2,300	1,500	930
		E32-T14	4,000*2	3,400	2,250	900	2,900	2,200	1,450	900
		E32-T11L/E32-T12L	1,700	1,330	870	350	1,100	870	580	350
		E32-T11L + E39-F2	910	800	500	180	600	520	340	180
		E32-T11R + E39-F2	520	400	250	100	330	260	170	100
		E32-T11 + E39-F2	820	660	430	160	530	430	280	160
		E32-T21L/E32-T22L	540	440	250	100	340	260	170	100
	Ultracompact, ultrafine sleeve	E32-T223R	160	130	75	30	110	85	55	30
		E32-T33-S5	53	44	25	10	35	28	18	10
		E32-T333-S5	12	10	6	4	8	6	5	4
		E32-T334-S5	6	5	3	2	4	3	2	2
	Fine beam	E32-T22S	2,500	1,900	1,250	500	1,600	1,250	830	500
		E32-T24S	1,750	1,300	870	350	1,100	870	580	350
	Area sensing	E32-T16PR	1,100	840	560	220	730	560	370	220
		E32-T16P	1,500	1,100	750	300	970	750	500	300
		E32-T16JR	980	750	480	190	600	480	320	190
		E32-T16J	1,300	1,000	650	260	800	650	430	260
		E32-T16WR	1,700	1,300	850	340	1,100	860	570	340
		E32-T16W	2,300	1,800	1,150	450	1,400	1,100	730	450
		E32-T16	3,700	2,800	1,850	740	2,400	1,800	1,200	740
		E32-M21	750	610	350	140	470	360	240	140

*1. The optical fiber for the E32-T17L is 10 m long on each side, so the value is 20,000 mm

*2. The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

Type	Model	E3X-DA□-S				E3X-MDA□				
		High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	
Environment resistive models	Heat-resistant	E32-T51	1,000	760	500	200	650	500	330	200
		E32-T54	300	230	150	60	190	150	100	60
		E32-T81R-S	360	280	180	70	230	180	120	70
		E32-T61-S + E39-F2	600	450	300	120	390	300	200	120
		E32-T61-S + E39-F1	4,000	3,400	2,200	900	3,000	2,200	1,450	900
		E32-T84S-S	1,750	1,300	870	350	1,100	870	570	350
		E32-T61-S	600	450	300	120	390	300	200	120
	Chemical resistant	E32-T11F	2,500	2,000	1,300	520	1,600	1,300	850	520
		E32-T12F	4,000*	3,000	2,000	800	2,600	2,000	1,300	800
		E32-T14F	500	400	250	100	320	250	160	100
		E32-T51F	1,800	1,400	900	350	1,190	920	600	350
		E32-T81F-S	920	700	460	190	600	460	300	190
	Vacuum resistant	E32-T51V	260	200	130	50	170	130	85	50
		E32-T51V + E39-F1V	1,350	1,000	680	260	850	650	430	260
		E32-T54V	210	130	100	35	110	85	55	35
		E32-T54V + E39-F1V	660	500	330	180	420	320	210	180
		E32-T84SV	630	480	320	130	410	310	200	130

* The optical fiber for the E32-T12F is 2 m long on each side, so the sensing distance is 4,000 mm.

Reflective Models

(Unit: mm)

Type	Model	E3X-DA□-S				E3X-MDA□				
		High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	
Standard models	Flexible (new standard)	E32-D11R/E32-D12R/E32-D15XR/ E32-DC200BR(B4R)	300	170	120	50	170	120	80	50
		E32-D14LR	80	45	30	14	45	33	22	14
		E32-D15YR/E32-D15ZR	70	40	26	12	40	29	19	12
		E32-D211R/E32-D21R/E32-D22R/ E32-D25XR/E32-DC200FR(F4R)	50	30	20	8	30	22	14	8
		E32-D24R	26	15	10	4	15	10	6	4
		E32-D25YR/E32-D25ZR	14	8	5	2	8	5	3.3	2
		E32-DC200/E32-D15X/ E32-DC200B(B4)	500	300	200	90	300	210	130	90
	Standard	E32-D12	400	230	160	70	230	160	100	70
		E32-D14L	200	110	80	36	110	80	50	36
		E32-D15Y/E32-D15Z	170	100	65	30	100	70	45	30
		E32-D211/E32-DC200E/E32-D22/ E32-D25X/E32-DC200F(F4)	130	80	50	22	80	55	35	22
		E32-D24	50	30	20	8	30	22	14	8
		E32-D25Y/E32-D25Z	35	20	12	6	20	14	9	6
		E32-D11/E32-D15XB	300	170	120	50	170	125	80	50
	Break-resistant	E32-D21B/E32-D221B	110	70	45	20	70	50	30	20
		E32-D21/E32-D22B	50	30	20	8	30	22	14	8
		E32-D25XB	85	50	30	15	50	35	23	15
		E32-D11U	300	170	120	50	170	125	80	50

Type		Model	E3X-DA□-S				E3X-MDA□			
			High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode
Special-beam models	Long distance, high power	E32-D16	40 to 1,000	40 to 700	40 to 450	40 to 240	40 to 600	40 to 490	40 to 300	40 to 240
		E32-D11L	650	400	260	110	400	270	180	110
		E32-D21L/E32-D22L	210	130	80	35	130	85	55	35
	Ultracompact, ultrafine sleeve	E32-D33	25	16	10	4	16	10	6	4
		E32-D331	5	3	2	0.8	3	2	1.3	0.8
	Coaxial/small spot	E32-CC200R	250	150	100	45	150	105	65	45
		E32-CC200	500	300	200	90	300	210	140	90
		E32-D32L	250	150	100	45	150	100	65	45
		E32-C31/E32-D32	120	75	50	22	75	50	30	22
		E32-C42 + E39-F3A	Spot diameter variable in the range 0.1 to 0.6 mm at distances in the range 6 to 15 mm.							
		E32-D32 + E39-F3A	Spot diameter variable in the range 0.5 to 1 mm at distances in the range 6 to 15 mm.							
		E32-C41 + E39-F3A-5	0.1-mm dia. spot at a distance of 7 mm.							
		E32-C31 + E39-F3A-5	0.5-mm dia. spot at a distance of 7 mm.							
		E32-C41 + E39-F3B	0.2-mm dia. spot at a distance of 17 mm.							
		E32-C31 + E39-F3B	0.5-mm dia. spot at a distance of 17 mm.							
		E32-C31 + E39-F3C	Spot diameter of 4 mm max. at distances in the range 0 to 20 mm.							
Environment-resistant models	Area sensing	E32-D36P1	250	150	100	45	150	100	65	45
	Retroreflective	E32-R21 + E39-R3 (provided)	10 to 250							
		E32-R16 + E39-R1 (provided)	150 to 1,500							
	Convergent-reflective	E32-L25/E32-L25A	3.3							
		E32-L24S	0 to 4							
		E32-L24L	2 to 6 (center 4)							
		E32-L25L	5.4 to 9 (center 7.2)							
		E32-L86	4 to 10							
		E32-L16	0 to 15			0 to 12	0 to 15			0 to 12
	Heat-resistant	E32-D51	400	230	160	72	230	165	110	72
		E32-D81R-S E32-D61-S	150	90	60	27	90	63	40	27
		E32-D73-S	100	60	40	18	60	40	25	18
	Chemical-resistant	E32-D12F	160	95	65	30	95	70	45	30
		E32-D14F	70	40	30	10	40	28	18	10

Application-specific Models

(Unit: mm)

Type	Model	E3X-DA□-S				E3X-MDA□			
		High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode
Application-specific models	Label detection	E32-G14	10						
		E32-T14	4,000*	3,400	2,250	900	2,900	2,200	1,450
	Liquid-level detection	E32-L25T	Applicable tube: Transparent tube with a diameter in the range 8 to 10 mm and a recommended wall thickness of 1 mm						
		E32-D36T	Applicable tube: Transparent tube (no restriction on diameter)						
		E32-A01	Applicable tube: Transparent tube with a diameter of 3.2, 6.4, or 9.5 mm and a recommended wall thickness of 1 mm						
		E32-A02	Applicable tube: Transparent tube with a diameter in the range 6 to 13 mm and a recommended wall thickness of 1 mm						
		E32-D82F1(F2)	Liquid-contact model						
	Glass-substrate alignment	E32-L16	0 to 15		0 to 12	0 to 15		0 to 12	
		E32-A08	10 to 20		--	10 to 20		--	
		E32-A07E1(E2)	15 to 25		--	15 to 25		--	
		E32-L66	5 to 18	5 to 16	--	5 to 18	5 to 14	--	
	Glass-substrate Mapping	E32-A09/E32-A09H	15 to 38		--	15 to 38		--	
		E32-A09H2	20 to 30		--	20 to 30		--	
	Wafer mapping	E32-A03/E32-A03-1	1,150	890	600	250	750	580	380
		E32-T24S	1,750	1,300	870	350	1,100	870	580
		E32-A04/E32-A04-1	460	340	225	100	300	220	145

* The optical fiber for the E32-T14 is 2 m long on each side, so the sensing distance is 4,000 mm.

Green, Blue, and Infrared Light Sources

(Unit: mm)

Type		Model	E3X-DAG□-S/DAB□-S				E3X-DAH□-S			
			High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode	High-resolution mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam models	Standard	E32-T11R/E32-T12R/E32-T15XR/ E32-TC200BR(B4R)	65	50	35	30	280	190	130	55
		E32-T14LR/E32-T15YR/ E32-T15ZR	25	20	22	12	100	75	80	21
		E32-TC200/E32-T12/E32-T15X/ E32-TC200B(B4)	100	75	50	45	400	280	180	80
		E32-T14L/E32-T15Y/E32-T15Z	50	40	30	25	240	160	110	45
	Special beam	E32-T11L/E32-T12L	150	120	85	75	700	490	320	140
Reflective models	Standard	E32-D11R/E32-D12R/E32-D15XR/ E32-DC200BR(B4R)	17	14	10	8	120	90	60	21
		E32-D14LR	4.4	3.5	2.5	2.2	32	24	16	5.5
		E32-D15YR/E32-D15ZR	4.2	3.3	2.2	2.1	28	20	13	5
		E32-DC200/E32-D15X/ E32-DC200B(B4)	32	25	16	16	200	150	100	35
		E32-D14L	11	9	6	5.5	80	60	40	14
		E32-D15Y/E32-D15Z	10	8	5.5	5	65	50	33	11
	Special beam	E32-D11L	44	35	22	22	260	190	130	45
		E32-CC200R	15	12	8	7.5	100	75	50	17
		E32-CC200	32	25	16	16	200	150	100	35
		E32-D32L	15	12	8	7.5	100	75	50	17
		E32-C31/E32-D32	7.5	6	4	3.5	50	37	25	8.5
Application-specific models	Label detection	E32-T14	320	260	220	160	1,800	1,200	820	360
		E32-G14	10				10			

Refer to E32 Series for details on Fiber Units.

(Unit: mm)

Dimensions

Amplifier Units

Amplifier Units with Cables

E3X-DA11-S

E3X-DA41-S

E3X-DAG11-S

E3X-DAG41-S

E3X-DAB11-S

E3X-DAB41-S

E3X-DA11RM-S

E3X-DA41RM-S

E3X-DA11TW-S

E3X-DA41TW-S

E3X-DA11SE-S

E3X-DA41SE-S

E3X-DA11AT-S


E3X-DA41AT-S

E3X-DA11AN-S

E3X-DA41AN-S

E3X-MDA11


E3X-MDA41

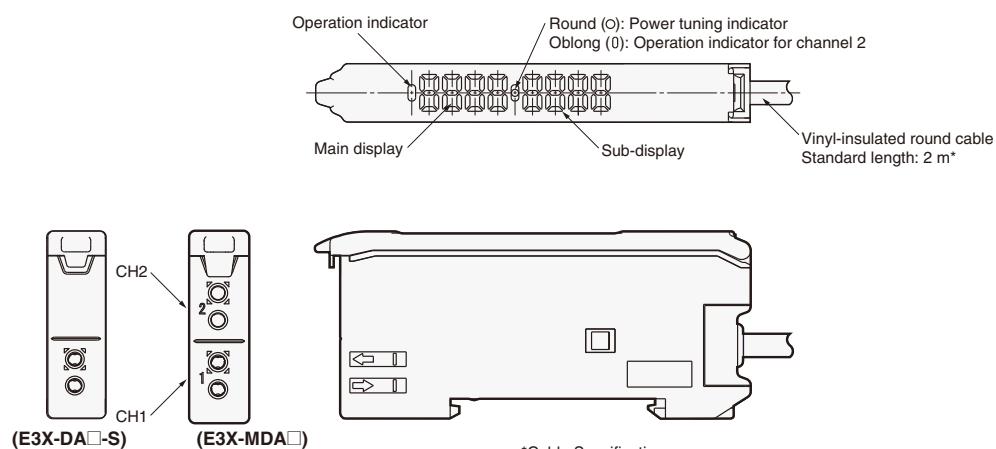





*Cable Specifications

E3X-DA11-S -DA41-S -DAG11-S -DAG41-S -DAB11-S -DAB41-S	4-dia., 3-conductor (Conductor cross section: 0.2 mm ² , insulator diameter: 1.1 mm)
E3X-DA11TW-S -DA41TW-S -DA11RM-S -DA41RM-S	4-dia., 4-conductor (Conductor cross section: 0.2 mm ² , insulator diameter, 1.1 mm)
E3X-MDA11 -MDA41	4-dia., 2-conductor (Conductor cross section: 0.2 mm ² , insulator diameter: 1.1 mm)

With Mounting Bracket Attached

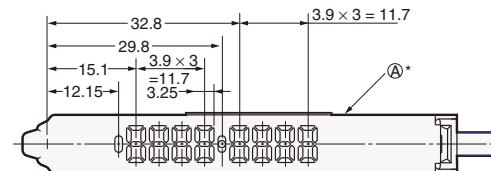



* The Mounting Bracket can also be used on this side.

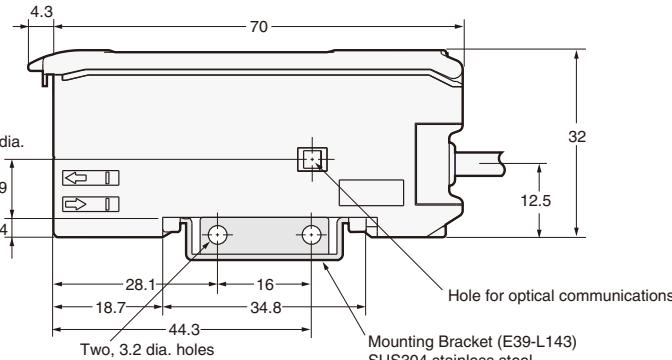

Mounting Holes


Amplifier Units with Connectors

E3X-DA6-S
E3X-DA8-S
E3X-DAG6-S
E3X-DAG8-S
E3X-DAB6-S
E3X-DAB8-S
E3X-DA6RM-S
E3X-DA8RM-S
E3X-DA6TW-S
E3X-DA8TW-S
E3X-DA6SE-S
E3X-DA8SE-S
E3X-DA6AT-S
E3X-DA8AT-S
E3X-MDA6
E3X-MDA8

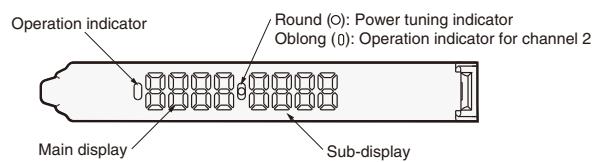

With Mounting Bracket Attached

*1 The Mounting Bracket can also be used on this side.
 *2 Cable Diameters

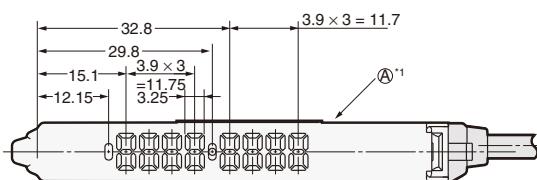

E3X-CN22 (2 conductors)	4.0-mm dia.
E3X-CN21 (4 conductors)	
E3X-CN11 (3 conductors)	
E3X-CN12 (1 conductor)	2.6-mm dia.

