

# QUINT-PS/ 1AC/12DC/15

Order No.: 2866718



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866718>

DIN rail power supply unit 12 V DC/15 A, primary switched-mode, 1-phase. The SFB technology (Selective Fuse Breaking Technology) can now also be used to trigger standard power circuit breakers reliably and quickly.



| Commercial data          |                    |
|--------------------------|--------------------|
| EAN                      | 4046356307888      |
| Pack                     | 1 pcs.             |
| Customs tariff           | 85044081           |
| Weight/Piece             | 1.50 KG            |
| Catalog page information | Page 568 (IF-2009) |

### Product notes

WEEE/RoHS-compliant since: 04/12/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Product description

QUINT POWER power supply units – Maximum system availability with SFB technology

Compact power supply units of the new QUINT POWER generation maximize the availability of your system. With the SFB technology (Selective Fuse Breaking Technology), six times the nominal current for 12 ms, even the standard power circuit-breakers can now also be triggered reliably and quickly. Faulty current paths are switched off selectively, the fault is located and important system parts continue to operate. Comprehensive diagnostics are provided through constant monitoring of output voltage and current. This preventive function monitoring visualizes critical operating modes and reports them to the control unit before an error can occur.

## Technical data

### Input data

|                              |  |
|------------------------------|--|
| Nominal input voltage        | 100 V AC ... 240 V AC                                |
| AC input voltage range       | 85 V AC ... 264 V AC                                 |
| DC input voltage range       | 90 V DC ... 350 V DC                                 |
| Short-term input voltage     | 300 V AC   |
| AC frequency range           | 45 Hz ... 65 Hz                                      |
| DC frequency range           | 0 Hz   |
| Current consumption          | Approx. 1.9 A (120 V AC)<br>Approx. 0.9 A (230 V AC) |
| Inrush surge current         | < 15 A (typical)                                     |
| Power failure bypass         | > 65 ms (120 V AC)<br>> 65 ms (230 V AC)             |
| Input fuse                   | 6.3 A (slow-blow, internal)                          |
| Recommended backup fuse      | 10 A (characteristic B)<br>16 A (characteristic B)   |
| Name of protection           | Transient surge protection                           |
| Protective circuit/component | Varistor   |

### Output data

|                                     |  |
|-------------------------------------|--|
| Nominal output voltage              | 12 V DC $\pm$ 1%   |
| Setting range of the output voltage | 5 V DC ... 18 V DC (> 12 V constant capacity)  |
| Output current                      | 15 A (-25 °C ... 60 °C)<br>16 A (with POWER BOOST, -25°C ... 40°C permanent)<br>60 A (with SFB technology, 12 ms)                        |
| Magnetic fuse tripping              | max 6 A (characteristic B)   |
| Derating                            | From +60°C to 70°C: 2.5% per Kelvin  |
| Connection in parallel              | Yes, for redundancy and increased capacity   |
| Connection in series                | Yes  |
| Control deviation                   | < 1 % (change in load, static 10% ... 90%)<br>< 2 % (change in load, dynamic 10% ... 90%)<br>< 0.1 % (change in input voltage $\pm$ 10%) |
| Residual ripple                     | < 10 mVPP (with nominal values)  |
| Maximum power dissipation idling    | 5 W  |
| Power loss nominal load max.        | 21 W   |

**General data**

|  |   |
|--|---|
| Width  | 60 mm   |
| Height   | 130 mm  |
| Depth  | 125 mm  |
| Weight   | 1.1 kg  |
| Efficiency   | > 89 % (for 230 V AC and nominal values)  |
| Insulation voltage input/output  | 4 kV AC (type test)<br>2 kV AC (routine test)   |
| Degree of protection   | IP20  |
| Class of protection  | I, with PE connection   |
| MTBF   | > 500 000 h in acc. with IEC 61709 (SN 29500)   |
| Ambient temperature (operation)  | -25 °C ... 70 °C (> 60 °C derating)   |
| Ambient temperature (storage/transport)  | -40 °C ... 85 °C  |
| Max. permissible relative humidity (operation)   | 95 % (at 25 °C, no condensation)  |
| Mounting position  | Horizontal DIN rail NS 35, EN 60715   |
| Assembly instructions  | Can be aligned: horizontally 5 mm, in addition to active components of 15 mm, vertically 5 cm |
| Electromagnetic compatibility  | Conformance with EMC guideline 2004/108/EC and for low-voltage guideline 2006/95/EC           |
| Emitted interference   | EN 50081-2  |
| Immunity to interference   | EN 61000-6-2:2005   |
| Standard – Electrical equipment of machines  | EN 60204  |
| Standard - Safety of transformers  | IEC 61558-2-17  |
| Standard - Electrical safety   | IEC 60950/VDE 0805 (SELV)   |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)  |
| Standard – Safety extra-low voltage  | IEC 60950 (SELV) and EN 60204 (PELV)  |
| Standard - Safe isolation  | DIN VDE 0100-410<br>DIN VDE 0106-1010   |
| Standard – Protection against electric shock   | DIN 57100-410   |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment               | DIN VDE 0106-101  |
| Standard – Limitation of mains harmonic currents   | EN 61000-3-2  |
| Standard – Equipment safety  | GS (tested safety)  |
| Standard network variation (undervoltage)  | Semi F47-0706   |
| Certificate  | CB Scheme   |

|              |                             |
|--------------|-----------------------------|
| UL approvals | UL Listed UL 508            |
|              | UL/C-UL Recognized UL 60950 |

**Connection data, input**

|  |                            |
|--|----------------------------|
| Type of connection                     | Pluggable screw connection |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup>        |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>        |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG/kcmil min. | 16                         |
| Conductor cross section AWG/kcmil max  | 12                         |
| Stripping length                       | 7 mm                       |
| Screw thread                           | M3                         |

**Connection data, output**

|  |                            |
|--|----------------------------|
| Type of connection                     | Pluggable screw connection |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup>        |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>        |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG/kcmil min. | 16                         |
| Conductor cross section AWG/kcmil max  | 12                         |
| Stripping length                       | 7 mm                       |

**Signaling**

|  |   |
|--|---|
| Output name                            | DC OK active                                      |
| Output description                     | $U_{OUT} > 0.9 \times U_N$ : High signal          |
| Maximum inrush current                 | $\leq 20$ mA (short circuit resistant)            |
| Continuous load current                | $\leq 20$ mA                                      |
| Status display                         | $U_{OUT} > 0.9 \times U_N$ : "DC OK" LED green    |
| Note on status display                 | $U_{OUT} < 0.9 \times U_N$ : Flashing "DC OK" LED |
|  | $I_{OUT} < I_N$ : LED ON                          |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>                               |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup>                               |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>                               |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>                               |
| Conductor cross section AWG/kcmil min. | 16  |

|                                       |  |
|---------------------------------------|--|
| Conductor cross section AWG/kcmil max | 12   |
| Tightening torque, min                | 0.5 Nm   |
| Tightening torque max                 | 0.6 Nm   |
| Screw thread                          | M3   |
| Output name                           | DC OK floating   |
| Output description                    | Relay contact, $U_{OUT} > 0.9 \times U_N$ : Contact closed |
| Maximum switching voltage             | $\leq 30$ V AC/DC ( $\leq 0.5$ A / at 60 V AC/DC)          |
| Maximum inrush current                | $\leq 1$ A   |
| Continuous load current               | $\leq 1$ A   |
| Status display                        | $U_{OUT} > 0.9 \times U_N$ : "DC OK" LED green             |
| Note on status display                | $U_{OUT} < 0.9 \times U_N$ : Flashing "DC OK" LED          |
| Output name                           | POWER BOOST, active  |
| Output description                    | $I_{OUT} < I_N$ : High signal                              |
| Maximum inrush current                | $\leq 20$ mA (short circuit resistant)                     |
| Continuous load current               | $\leq 20$ mA   |
| Status display                        | $I_{OUT} > I_N$ : LED "BOOST" yellow                       |

#### Certificates / Approvals



Certification CB, CSA, CUL, UL, UL Listed


#### Accessories

| Item           | Designation          | Description   |
|----------------|----------------------|---|
| <b>General</b> |                      |   |
| 2938206        | QUINT-PS-ADAPTERS7/2 | Assembly adapter for QUINT POWER 10A on S7-300 rail |
| 2938235        | UWA 182/52           | Universal wall adapter                              |

## Diagrams/Drawings

### Block diagram

---

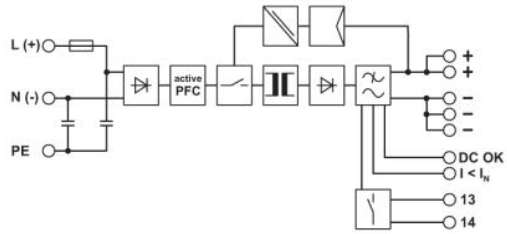

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;