

Enclosed or L Bracket

PCB Mount

Non Isolated

# DC-DC Selector

Nominal Input Voltage	# of Outputs	Output Power (W)							
		3	10	30	50	100	150	300	600
5V	Single	CC-E							
		iAC, iBA							
	Dual	CC-E							
12V	Single	CC-E							
		iA, iBC							
		PXD,PXE, PXF							
	Dual	CC-E							
		PXD,PXE, PXF							
Triple			PXF						
24V	Single	CC-E							
		PXD,PXE, PXF							
		PH-F							
		PH-S							
		iQ						PAH300	
		PAF							
	Dual	CC-E							
		PXD,PXE, PXF							
		PAH75D*							
	Triple			PXF					
48V	Single	CC-E							
		PXD,PXE, PXF							
		iSA, PAE*, iE, iP*							
		iQ, PAQ*							
		PH-F							
		PH-S							
		iH, PAH							
	PAF								
	Dual	CC-E							
		PXD,PXE, PXF							
		PAQ*							
		PAH75D*							
	Triple			PXF					
Multiple							Vega*		
82-185VDC	Single	PH-F							
		PH-S							
200-400VDC	Single	PH-F							
		PH-S							
								PAF	

\* See website



## 48V Input Full brick DC-DC Converters

- ◆ 12V output for driving non-isolated converters
- ◆ Safety Approved
- ◆ Full power at 85°C baseplate, operation to 100°C
- ◆ Opto Isolated Remote On / Off
- ◆ Wide Adjustable Output Range



### Key Market Segments & Applications

Central Office:	ATM, Sonet, DSL, ISDN, Frame Relay
Broadband:	Switching Equipment, Routers
Wireless/Cellular:	Micro Cells (larger in size/10 sq. mi.) Pico Cells (smaller in size/1 to 2 sq. mi.)
Remote Electronics:	Fixed Local Loop, Fiber Optic Transmission, Microwave Transmission, Wireless Local Loop
Base Station Power Amplifiers	

### PAF Features and Benefits


Feature	Benefit
◆ Wide Adjustment Range	◆ Reduces need for custom modules
◆ Parallel Pin	◆ Modules can be connected together for higher current
◆ ASIC Design	◆ Reduced component count, increased MTBF

### Specifications

MODEL		PAF700F48-12	PAF700F48-28
ITEMS			
Nominal Output Voltage	VDC	12	28
Output Current (Max)	A	58.5	25
Output Power (Max)	W	702	700
Efficiency (Typ)	%	90 to 91%	
Input Voltage Range	VDC	36-76	
Input Current (Typ)	A	16.5	16.4
Output Voltage Accuracy	%	±1	
Output Voltage Adjustment	VDC	7.2 - 13.8	16.8 - 32.2
Ripple & Noise (Max)	mV	200	280
Line Regulation (Max)	mV	24	56
Load Regulation (Max)	mV	24	56
Temperature Coefficient	-	0.02%/°C	
Overcurrent Protection	%	105 - 140%	
Overvoltage Protection	%	120 - 135%	
Signals & Control	-	Remote sense, remote On/Off, Parallel Pin, DC Good, 7-10V Auxiliary voltage	
Operating Temperature	-	-40°C to +100°C baseplate	
Humidity (operating)	-	20-95% RH Non condensing	
Humidity (storage)	-	10-95% RH Non condensing	
Cooling	-	Conduction (See Installation Manual for heatsink selection)	
Isolation Voltage	VDC	Input - Baseplate 1500V, Input - Output 1500V, Output-Baseplate 500V (for 1 min.)	
Shock	-	196.1m/s <sup>2</sup>	
Vibration	-	Non Operating, 10-55Hz (sweep for 1 min.) Amplitude 0.825mm constant (Max 49 m/s <sup>2</sup> ) X,Y,Z 1 hour each	
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1, CE LVD	
Weight (Typ)	g	200	
Size (WxHxD)	in(mm)	2.4 x 0.5 x 4.6 (61 x 12.7 x 116.8) See outline drawing	
Warranty	-	2 years	

Note: See Installation Manual for full details, test methods of parameters and application notes.


## PAF Outline Drawing

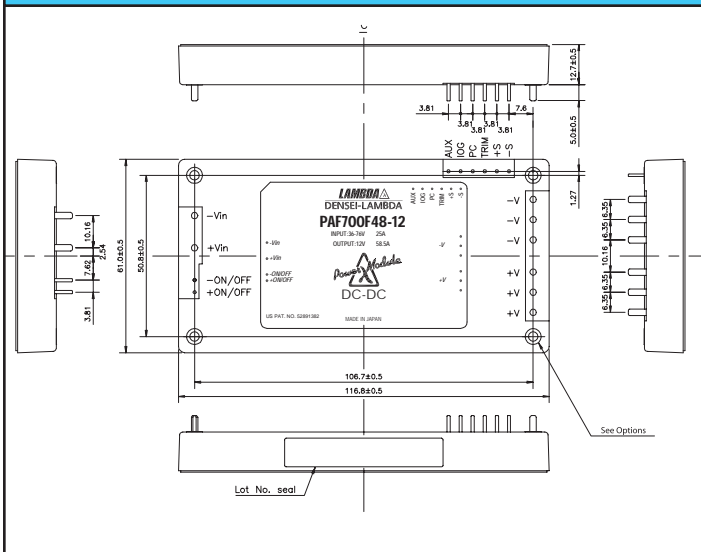

## Other Lambda DC-DC Products

PAF	Full Brick 400-700W DC-DC
PAH	Half brick DC-DC
PAQ	Quarter brick DC-DC
PX	10-40W, 12-48V DC-DC

## Connection Example

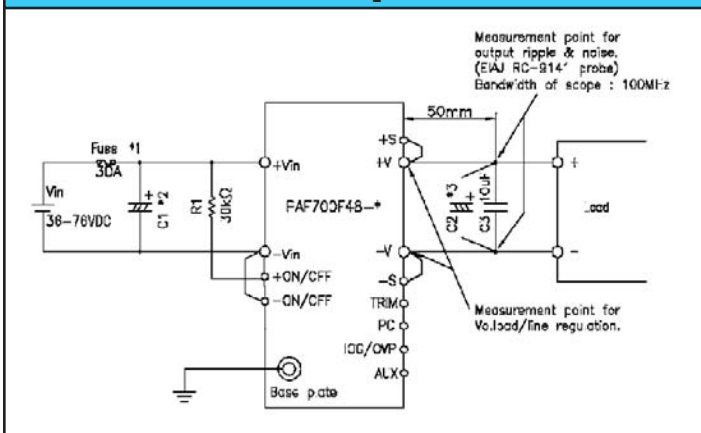


## Heatsink Table

Heatsink	Size (mm)	Thermal Resistance
HAF-10L	116.8 x 25.4 x 61	2.2°C/W
HAF-15L	116.8 x 38.1 x 61	1.9°C/W
HAF-15T	116.8 x 38.1 x 61	1.5°C/W

## Pinout

PIN	Description	Function
-Vin		Negative Input Terminal
+Vin		Positive Input Terminal
- ON/OFF		Remote On/Off Negative Terminal
+ON/OFF		Remote On/Off Positive Terminal
+V		Positive Output Terminal
-V		Negative Output Terminal
AUX		7-10V Aux Voltage
IOG		DC Good
PC		Parallel Control Connection
TRIM		Output Adjustment Trim Pin
+S		Positive Remote Sense
-S		Negative Remote Sense

## Derating Curve

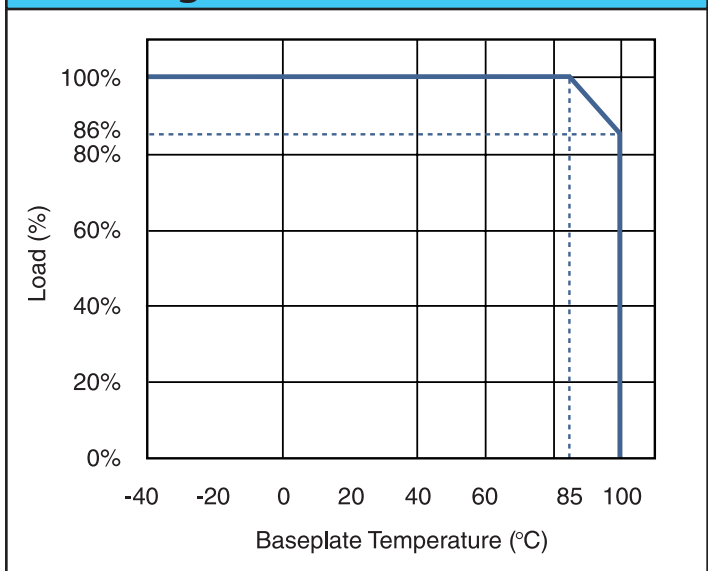

## Options

Suffix	Description
Blank	M3 tapped inserts (4)
/T	3.3mm non-threaded inserts (4)