

NEW ISOLATION TRANSFORMERS FOR 115-230-460 VOLT LINE APPLICATIONS



- These new units are designed for convenient connections
 - Solder Terminals on 50 VA & 100 VA Sizes
 - Screw Terminals on All Higher VA sizes
- 23V600 Series Transformers can be used for:
 - Step-Up,
 - Step-Down,
 - Straight Isolation.
- Primary 115 or 230 VAC & 230 or 460 VAC, 50/60Hz.
- Secondary 115/230 VAC.
- 5.0 Mil Thick Electrostatic Shield Grounded to Laminations.



Part Number	Primary	Secondary	VA	Fig.	Dimensions-Inches					Wt. Lbs.
					Case			Mounting		
					H	W	D	MW	MD	
23V601	115/230	115/230	50	B	2 9/16	3	2 3/4	2 1/2	2 3/8	3.0
23V602	115/230	115/230	100	B	2 9/16	3	3 5/8	2 1/2	3 1/4	4.5
23V603	115/230	115/230	250	A	3 13/16	4 1/2	3 3/4	3 3/4	2 7/8	9.5
23V604	115/230	115/230	500	A	4 7/16	5 1/4	5	4 3/8	3 7/8	18.0
23V605	115/230	115/230	750	A	4 7/16	5 1/4	6 1/4	4 3/8	4 15/16	24.5
23V606	115/230	115/230	1000	A	5 11/16	6 3/4	6 5/8	6 1/8	4	30.5
23V607	115/230	115/230	1500	A	5 11/16	6 3/4	7 1/4	6 1/8	5 3/8	44.0
23V608	115/230	115/230	2000	A	5 11/16	6 3/4	8	6 1/8	6 1/8	52.5
23V609	230/640	115/230	100	B	2 9/16	3	3 5/8	2 1/2	3 1/4	4.5
23V610	230/460	115/230	250	A	3 13/16	4 1/2	3 3/4	3 3/4	2 7/8	9.5
23V611	230/640	115/230	500	A	4 7/16	5 1/4	5	4 3/8	3 8/8	18.0
23V612	230/460	115/230	750	A	4 7/16	5 1/4	6 1/4	4 3/8	4 15/16	24.5
23V613	230/460	115/230	1000	A	5 11/16	6 3/4	6 5/8	6 1/8	4	30.5
23V614	230/460	115/230	1500	A	5 11/16	6 3/4	7 1/4	6 1/8	5 3/8	44.0
23V615	230/460	115/230	2000	A	5 11/16	6 3/4	8	6 1/8	6 1/8	52.5




Fig. A Screw Terminals

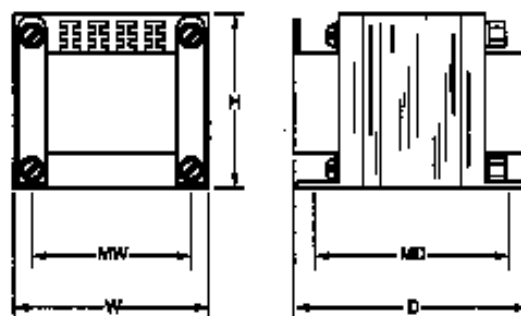


Fig. B Solder Lugs