

[HOME](#)[LOG IN](#)[YOUR CART](#)[CHECK OUT](#)[SERVICE](#)[ABOUT US](#)[Advanced](#)

**New Item**

SOS TurboFlare

### Custom Cable Assemblies

Build Your Own Cable!

### Cable Assemblies

Unshielded Jumpers  
Shielded Patch Cords  
Power\_Cords  
Mini\_DIN  
Coaxial  
Audio\_Extension


### Connectors

RCA  
UHF\_Coaxial  
Standard\_MIC  
Primary\_Power\_Receptacles  
Miniature\_Audio  
Gold\_Audio  
DC\_Power

### Jacks and Plugs

Test\_Probes  
Phono\_Plugs  
Phono\_Jacks  
Phone\_Plugs\_Subminiature  
Phone\_Plugs\_Standard  
Phone\_Plugs\_Miniature  
Phone\_Jacks\_Subminiature  
Phone\_Jacks\_Standard  
Phone\_Jacks\_Miniature  
Phone\_Jacks\_In-Line  
DIN\_Receptacles  
DIN\_Plugs  
Binding\_Posts

## DIN\_Plugs



*"8 pins, ext. barrel"*

[View schematic](#)

Quantity:

# ALECTRON CORPORATION

935 NORTH MAIN STREET  
FORT WORTH, TEXAS 76106




S/N 282-7045 P/N JR2704-5P

S/N 282-7048 P/N JR2704-8P

## SHIELDED STRAIGHT CORD PLUG

Metal Tube with Flexible Strain Relief  
Pin Contacts

JR-2704

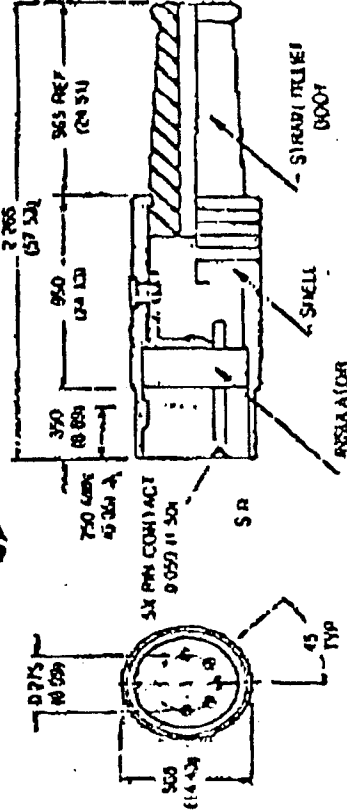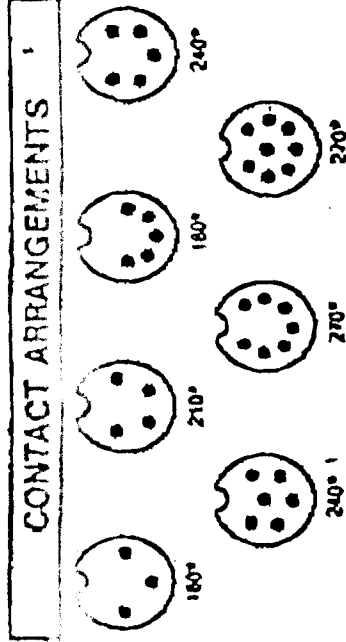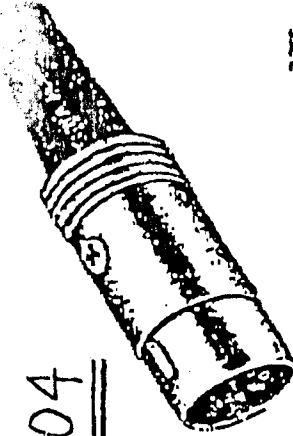

PART NUMBER	DESCRIPTION
2704/3P	3 Pins at 180°
2704/4P	4 Pins at 210°
2704/5P	5 Pins at 180°
2704/5P	6 Pins at 240°
2704/6P	6 Pins at 240°
2704/7P	7 Pins at 270°
2704/8P	8 Pins at 270°

### General Information

ELECTRICAL DATA	MATERIALS
Insulator Resistance: 100 megohms minimum at 500 VOC. DWV: 1000 Vrms. Contact Resistance: 10 milliohms max. Rating: 100 VAC, 2 AMPS.	Shell: Brass-nickel plated. Insulator: Thermoplastic. Contacts: Copper alloy-silver plated; consult factory for gold plated contacts.