

[HOME](#)[LOG IN](#)[YOUR CART](#)[CHECK OUT](#)[SERVICE](#)[ABOUT US](#)

SEARCH  
[Advanced](#)

**New Item**

SOS TurboFlare

### Custom Cable Assemblies

Build Your Own Cable!

### Cable Assemblies

Unshielded Jumpers

Shielded Patch Cords

Power\_Cords

Mini\_DIN

Coaxial

Audio\_Extension

### Connectors

RCA

UHF\_Coaxial

Standard\_MIC

Primary\_Power\_Receptacles

Miniature\_Audio

Gold\_Audio

DC\_Power

### Jacks and Plugs

Test\_Probes

Phono\_Plugs

Phono\_Jacks

Phone\_Plugs\_Subminiature

Phone\_Plugs\_Standard

Phone\_Plugs\_Miniature

Phone\_Jacks\_Subminiature

Phone\_Jacks\_Standard

Phone\_Jacks\_Miniature


Phone\_Jacks\_In-Line

DIN\_Receptacles

DIN\_Plugs

Binding\_Posts

## DIN\_Receptacles



*"3 contacts @ 180°, lock ring,  
panel mt."*

Straight DIN Receptacle. Mates with JR-2731-3P.

JR 2732

282-7323

(S+) 282-7325  
(5 PIN (180))


282-7326  
(5 PIN (240))

THE TOTAL LENGTH

(W/ PIN)


(E)

實物圖  
圖樣  
圖樣

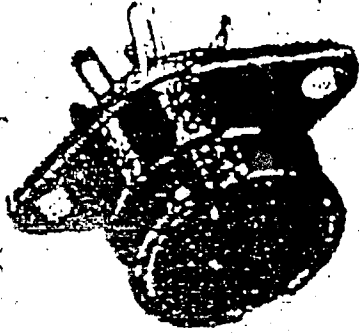



(一)

實物圖

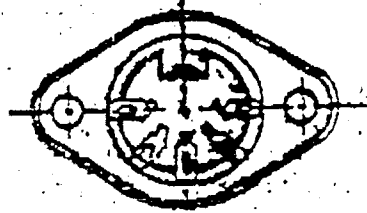


(二)

圖樣

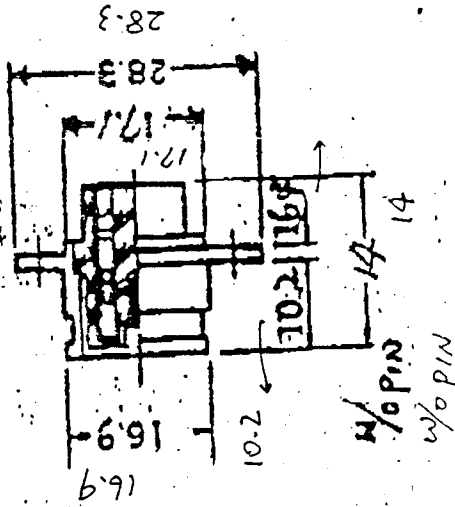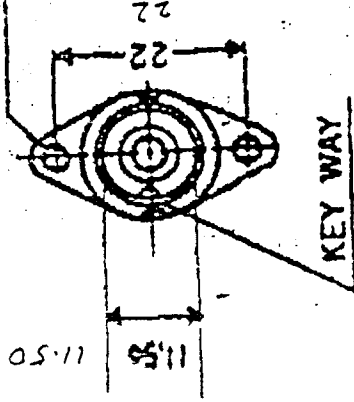

單位 = mm

UNIT = mm



	5PA (80)	5PB > 40	5PC > 60	6P	7P	8PA 270°

180°

> 40°