semiconductors :: product :: Bridge Rectifiers (Power)

Product: Bridge Rectifiers (Power)

Bridge Rectifiers are key devices in many applications where a rectifier signal is required as Input voltage. Linear Power Supplies, SMPS, Battery Chargers, Electronic Ballast... are some applications where they are used.


Manufactured using HYPERECTIFIER© technology, we offer these devices in several different packages: SMD, Dual In Line, Round, In Line and Square Power.

Product	Family	$I_{F(AV)}(A)$	I _{FSM} (A)	$V_{RRM}(V)$	$V_F(V)$	OUTLINE
FR1010L-R500/440-10L	FR10-I	10.0	200	1000	1 1	Power - Wire leads





10 Amp. Glass Pasivated Bridge Rectifiers

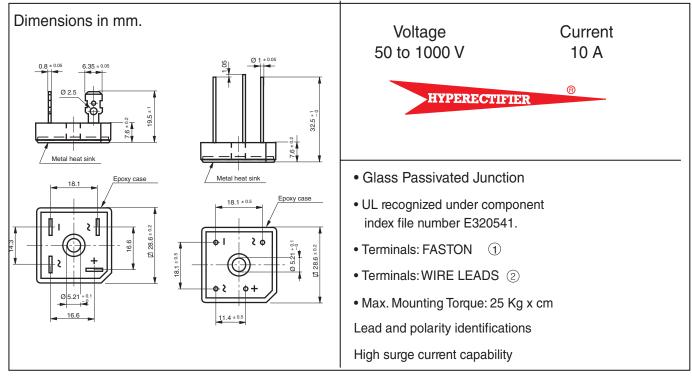

Maximum Ratings, according to IEC publication No. 134

	1	FB1000	FB1001	FB1002	FB1004	FB1006	FB1008	FB1010		
	2	FB1000L	FB1001L	FB1002L	FB1004L	FB1006L	FB1008L	FB1010L		
V _{RRM}	Peak Recurrent ReverseVoltage (V)	50	100	200	400	600	800	1000		
V _{RMS}	Maximum RMS Voltage (V)	35	70	140	280	420	560	700		
V _R	Recommended Input Voltage (V)	20	40	80	125	250	380	500		
I _{F(AV)}	Max. forward current R-load: At T case = 55° C At T case = 90° C With Al Square Chassis (200 cm ² x 3 mm.) Tamb = 45° C		10 A 7.5 A 5 A							
I _{FRM}	M Recurrent peak forward current		50 A							
IFSM	л 10 ms. peak forward current		200 A							
I ² t	I ² t value for fusing (t = 10 ms)		200 A ² sec							
Tj	Operating temperature range		− 55 to + 150 °C							
T _{stg}	Storage temperature range		− 55 to + 150 °C							

Electrical Characteristics at Tamb = 25 °C

VF	Max. forward voltage drop per element at I _F = 5 A	1.1 V
I _R	Max. reverse current per element at V _{RRM} d.c.	5 μ Α
R _{thj-c}	Typical thermal resistance junction to case	2 °C/W
	Isolation voltage from case to leads	2500 Vac