

Metered Rack PDU

Rack PDU, Metered, Zero U, 30A, 200/208V, (20) C13 & (4)C19



APC Metered Rack PDU , Input: 208V , Input
Connections: NEMA L6-30P , Cord Length:
10 feet (3.05 meters) , Output: 200V, 208V ,
Output Connections: IEC 320 C13,IEC 320 C19

Includes: Installation guide, Rack Mounting
brackets, Toolless Mounting Kit

Standard Lead Time: Usually in Stock

AP7841 Features

Toolless Mounting Capabilities	Units do not require additional tools to mount into APC NetShelter VX, which allows the users to quickly and easily mount units in the rear of the enclosure.
Vertical Mounting Capabilities	Easily mounts vertically in racks or enclosures and occupies zero U of valuable rack space, which allows more equipment in the rack. Units that mount vertically are optimized to fit in a NetShelter VX enclosures.
Resettable circuit breakers	Enables a quick recovery from overload events.

Metered Rack PDU Features & Benefits

Availability

Remote Management Capabilities Full-featured network management interfaces that provide standards-based management via Web, SNMP, and Telnet. Allows users to access, configure, and manage units from remote locations to save valuable time. Associated with this feature is the ability to quickly and easily upgrade the firmware via network download to installed units for future product enhancements. (Note: Only applicable for units categorized as Networked).

Local Current Monitoring Display The aggregate current draw per power distribution unit is displayed on the unit via a digital display. The local digital display helps installers avoid overloaded circuits by providing a visible warning when the current draw is close to the maximum amperage draw of the strip.

Alarm Thresholds Define alarm thresholds in order to avoid overloaded circuits. Network and visual alarms inform the user of possible problems. (Note: Only available on units with the current monitoring capabilities. Please see SKU specifications for availability)

Load indicator LED Indicates overload and warning conditions based on the user-defined alarm thresholds. Alerts users of potential overloaded circuits.

Integrates with InfraStruXure Central An IT-ready, scalable monitoring system that collects, organizes, and distributes critical alerts, surveillance video and key information, providing a unified view of complex physical infrastructure environments from anywhere on the network

Flash Upgradeable Quickly and easily upgrade firmware via network download for future product enhancements. Eliminates the need to replace products already installed in the field when new features are released. (Note: Networked units only)


Agility

Rack-Mountable Includes horizontal, vertical, and toolless-mount varieties. Puts power where it is needed most - in the racks near the equipment.


Single input power source Supply power from one branch whip to multiple pieces of equipment, conveniently powering rack-mount equipment. Saves time and money during installation by using one branch whip and standard connections.

Wide range of input and output connections Product family includes a variety of input and output connections to distribute 120V, 208V, or 230V power to multiple outlets. Having a variety of inputs and outputs allow users to adapt to varying power requirements. APC offers units that bring up to 14.4kW using a single branch whip.

Output

Nominal Output Voltage	200V,208V	
Maximum Total Current Draw per Phase	30A	
Output Connections	(20) IEC 320 C13 (4) IEC 320 C19	
Overload Protection	Yes	

Input

Nominal Input Voltage	208V	
Input Frequency	50/60 Hz	
Regulatory Derated Input Current (North America)	24A	
Input Connections	NEMA L6-30P	
Cord Length	3.05 meters	
Number of Power Cords	1	
Maximum Input Current per phase	30A	
Load Capacity	4992 VA	

Physical

Net Weight	5.68 KG
Maximum Height	1619.00 mm
Maximum Width	56.00 mm
Maximum Depth	44.00 mm
Shipping Weight	6.60 KG
Shipping Height	2134.00 mm
Shipping Width	152.00 mm
Shipping Depth	127.00 mm
Color	Black







Environmental

Operating Environment	0 - 45 °C
Operating Relative Humidity	5%

Operating Elevation	0-3000 meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	5%
Storage Elevation	0-15000 meters

Conformance

Regulatory Approvals	cUL Listed,CSA C22.2 No. 60950-1-03,FCC Part 15 Class A,ICES-003,Industry Canada,METI Denan,UL 60950-1,UL Listed,VCCI Class A,VCCI
Standard Warranty	2 years repair or replace
ROHS/WEEE Compliance	RoHS 7b Exemption

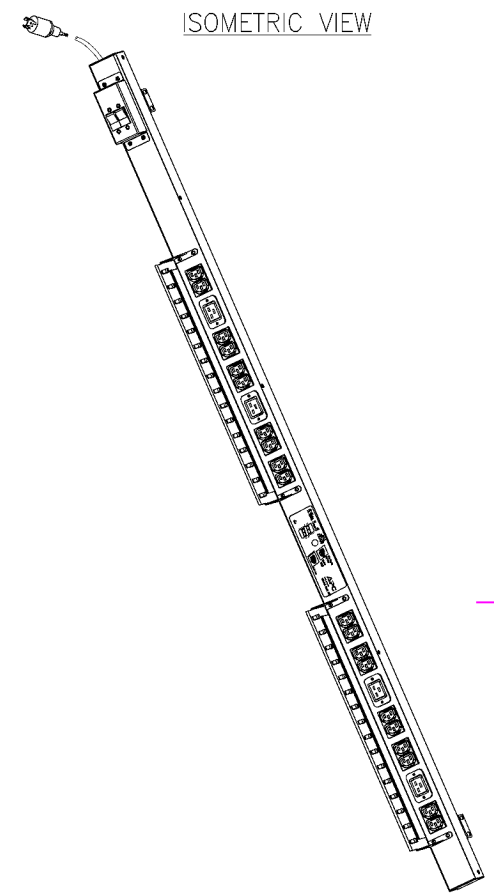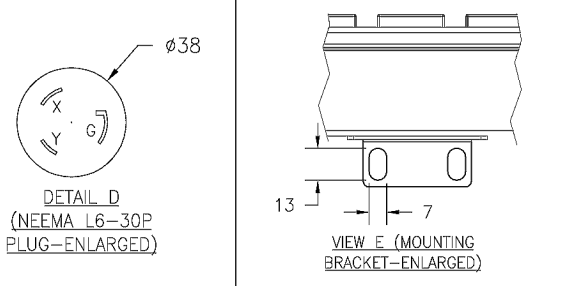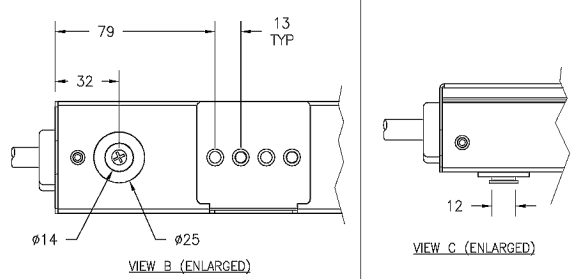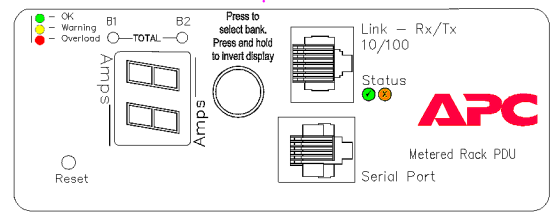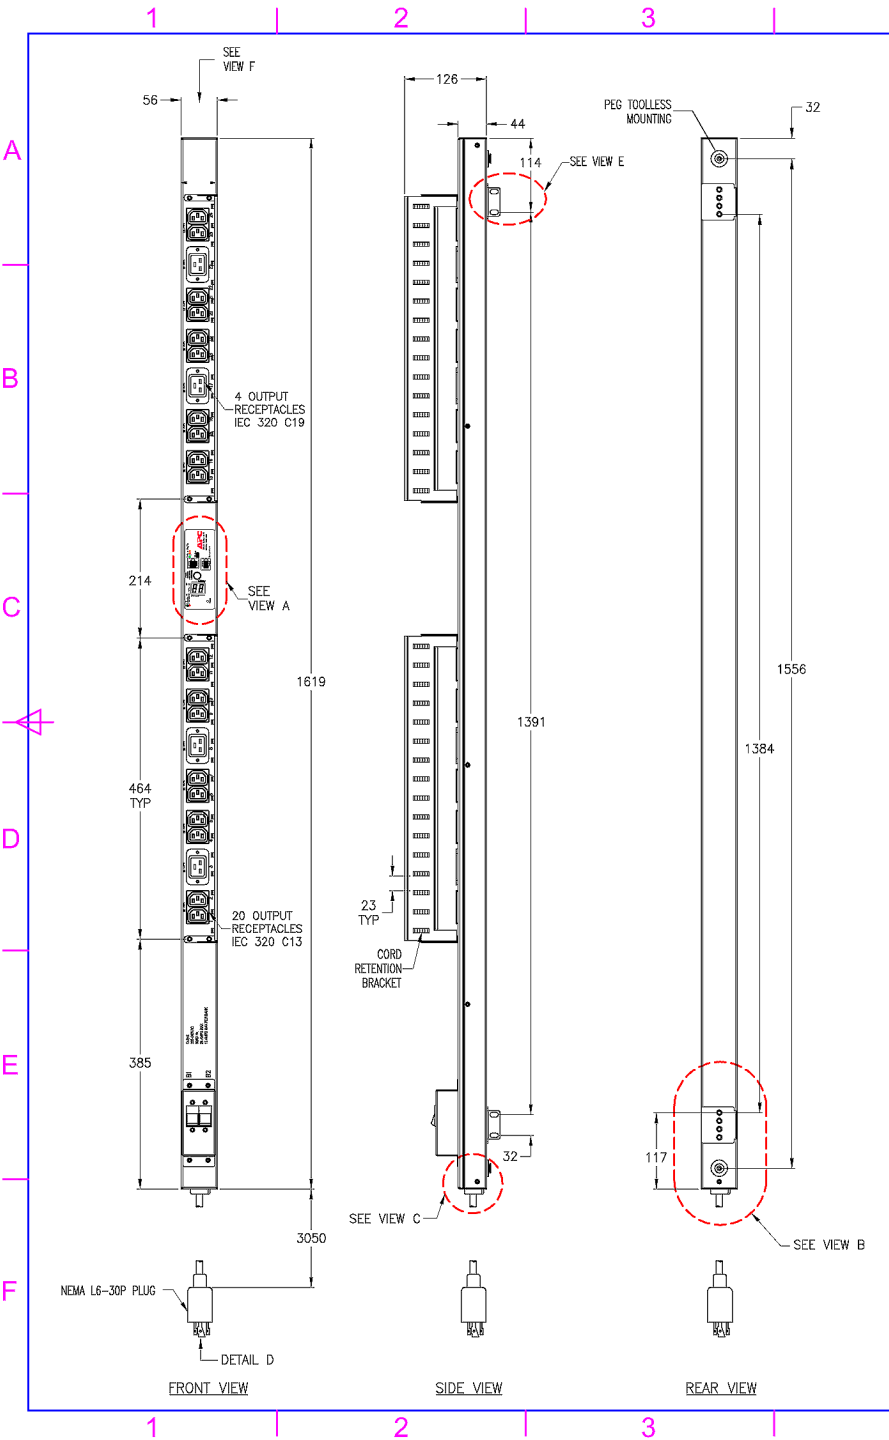

- NOTES:**
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. NET WEIGHT IS 5.68kgs.
 3. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR NON APC RACKS.
 4. BRACKET KITS TO MOUNT TO SPECIFIC COMPETITOR RACKS ARE AVAILABLE AS OPTIONS.
 5. INSTALLATION MUST COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM APC.
 THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



PROJECT	SUBMITTAL DRAWING	
DRAWN	BALAMURUGAN	SCALE
CHECKED	T.HORSTMANN	3-ANGLE PROJECTION
ENGINEER	J.SUN	

TITLE	RACK PDU, METERED ZERO U. 30A, 200/208V. INPUT: NEMA L6-30P OUTPUT: (20)IEC 320 C13 & (4)IEC 320 C19 MECHANICAL DETAILS		
DWG NO	AP7841	Sheet No.	1/1
REV.			-



Metered Rack PDU

Overview


The American Power Conversion® Metered Rack PDU distributes power to devices in the rack. It has a sensor that measures the current that it and its attached devices use. It can be monitored through Web, Telnet, SNMP, SSH, or InfraStruXure Manager interfaces.

Outlets. The Rack PDU has twenty IEC-320-C13 outlets and four IEC-320-C19 outlets.

Display Interface. A digital display shows aggregate current being used by the Rack PDU.

Power cord. The 10-foot (3.05-meter) power cord terminates with a NEMA L6-30 connector.

AP7841

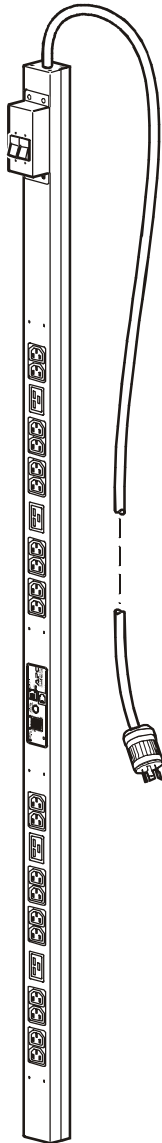

Specifications for AP7841

Electrical

Input connector	NEMA L6-30 plug
Output connectors	20-IEC-320-C13, 4-IEC-320-C19 outlets
Nominal input voltage	200-240 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	47-63 Hz

Physical

Size (H × W × D)	63.75 × 2.19 × 1.73 in (161.92 × 5.56 × 4.39 cm)
Shipping Dimensions (H × W × D)	84.00 × 6.00 × 5.00 in (213.36 × 15.24 × 12.7 cm)
Weight	12.50 lb (5.67 kg)
Shipping weight	14.50 lb (6.58 kg)

Environmental

Elevation (above MSL)	
Operating	0-15,000 ft (0-4500 m)
Storage	0-50,000 ft (0-15 000 m)
Temperature	
Operating	-5 to 45° C (23 to 115° F)
Storage	-25 to 65° C (-13 to 149° F)
Humidity	
Operating	5-95% RH Non-condensing
Storage	5-95% RH Non-condensing

Compliance

EMC verification	FCC Class A ICES-003 Class A
Safety verification	UL, cUL 60950

990-1897

