

Basic Rack PDU

Rack PDU, Basic, Zero U, 10A,230V, (15)C13



APC Basic Rack PDU , Input: 230V , Input Connections: IEC-320 C14 , Cord Length: 6.5 feet (1.98 meters) , Output: 208V, 230V , Output Connections: IEC 320 C13

Includes: Installation guide, Rack Mounting brackets, Toolless Mounting Kit

Standard Lead Time: Usually in Stock




AP9568 Features

Toolless Mounting Capabilities	Units do not require additional tools to mount into APC NetShelter VX, which allows the users to quickly and easily mount units in the rear of the enclosure.
Vertical Mounting Capabilities	Easily mounts vertically in racks or enclosures and occupies zero U of valuable rack space, which allows more equipment in the rack. Units that mount vertically are optimized to fit in a NetShelter VX enclosures.

Basic Rack PDU Features & Benefits

Agility	
Rack-Mountable	Includes horizontal, vertical, and toolless-mount varieties. Puts power where it is needed most - in the racks near the equipment.
Single input power source	Supply power from one branch whip to multiple pieces of equipment, conveniently powering rack-mount equipment. Saves time and money during installation by using one branch whip and standard connections.
Wide range of input and output connections	Product family includes a variety of input and output connections to distribute 120V, 208V, or 230V power to multiple outlets. Having a variety of inputs and outputs allow users to adapt to varying power requirements. APC offers units that bring up to 14.4kW using a single branch whip.

Output

Nominal Output Voltage	208V,230V	
Maximum Total Current Draw per Phase	10A	
Output Connections	(15) IEC 320 C13	

Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz
Input Connections	IEC-320 C14
Cord Length	6.5 feet (1.98 meters)
Number of Power Cords	1
Acceptable Input Voltage	200-240 VAC
Maximum Input Current per phase	10A
Load Capacity	2300 VA

Physical

Net Weight	4.40 lbs. (2.00 kg)
Maximum Height	24.00 inches (610 mm)
Maximum Width	1.75 inches (44 mm)
Maximum Depth	1.75 inches (44 mm)
Shipping Weight	6.00 lbs. (2.73 kg)
Shipping Height	25.50 inches (648 mm)
Shipping Width	7.00 inches (178 mm)
Shipping Depth	6.00 inches (152 mm)
Color	Black

Environmental

Operating Environment	32 - 113 °F (0 - 45 °C)
Operating Relative Humidity	0%
Operating Elevation	0-10000 feet (0-3000 meters)
Storage Temperature	-13 - 149 °F (-25 - 65 °C)
Storage Relative Humidity	0%
Storage Elevation	0-50000 feet (0-15000 meters)

Conformance

Regulatory Approvals	cUL Recognized,CE,CSA,GOST,Queensland Australia,UL 1363,UL Recognized,VDE
Standard Warranty	2 years repair or replace
ROHS/WEEE Compliance	RoHS 7b Exemption



Rack PDU


Overview

The American Power Conversion (APC®) Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

Outlets. The PDU has fifteen (15) IEC-320-C13 outlets.

Power cord. The 6.5-foot (1.98-meter) power cord terminates with a IEC-320-C14 plug.

AP9568

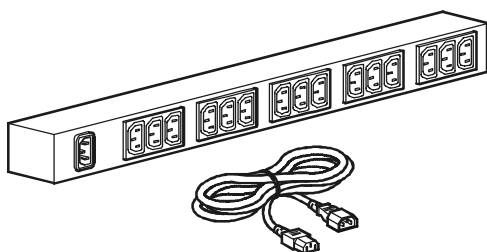



Specifications for AP9568

Electrical

Input connector	IEC-320-C14 inlet
Output connectors	(15) IEC-320-C13 outlets
Nominal input voltage	120-240 VAC
Acceptable input voltage	± 10% of nominal voltage
Input frequency	50/60 Hz

Physical

Dimensions (H × W × D)	24.00 × 1.75 × 1.75 in (60.96 × 4.44 × 4.44 cm)
Shipping dimensions (H × W × D)	25.13 × 6.63 × 5.75 in (63.81 × 16.82 × 14.60 cm)
Weight	4.40lb (2.19kg)
Shipping weight	6.00lb (2.90kg)

Environmental

Elevation (above MSL)	
Operating	0 – 10,000 ft (0 – 3000m)
Storage	0 – 50,000 ft (0 – 15 000m)
Temperature	
Operating	32 to 113° F (0 to 45° C)
Storage	-13 to 149° F (-25 to 65° C)
Humidity	
Operating	5 – 95% RH non-condensing
Storage	5 – 95% RH non-condensing

Compliance

Safety	UL/ cUL Listed UL 60950, EN 60950, VDE, AS/NZS 60950
--------	--



990-1487A-001