




## APC Essential SurgeArrest, 4 outlet, phone line protection, wall mount

**Part Number:** P4T

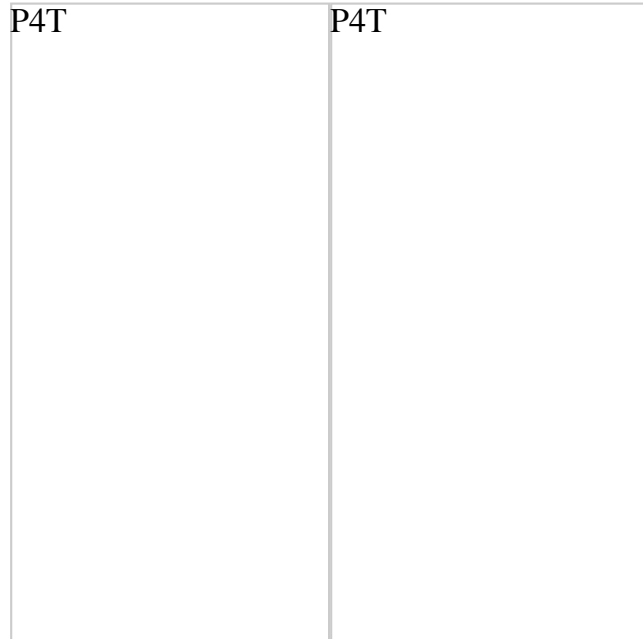

## Output

Number of Outlets	4
Receptacle Style	NEMA 5-15R

## Input

Nominal Input Voltage	120V
Input Frequency	50/60 Hz
Input Connections	NEMA 5-15P
Maximum Line Current per phase	15A



## Surge Protection and Filtering

Surge energy rating	680 Joules
eP Joule Rating	700
EMI/RFI Noise rejection (100 kHz to 10 mHz)	20 dB
Dataline protection	RJ-11 Modem/Fax protection
Let Through Voltage Rating	< 330

## Physical

Net Weight	0.45 lbs. (0.20 kg)
Maximum Height	5.75 inches (146 mm)
Maximum Width	1.75 inches (44 mm)
Maximum depth	2.50 inches (64 mm)
Shipping Weight	0.50 lbs. (0.23 kg)
Shipping Height	9.50 inches (241 mm)
Shipping Width	1.75 inches (44 mm)
Shipping Depth	5.75 inches (146 mm)
Master Carton Units	12.00
Master Carton Dimensions (Length x Width x Height)	11 X 12 X 10 inches
Master Carton Weight	6.20 lbs.
SCC Codes	1073130420655 9
Color	Black

## Environmental

Operating Environment	32 - 104 °F (0 - 40 °C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0-10000 feet (0-3000 meters)
Storage Temperature	5 - 113 °F (-15 - 45 °C)
Storage Relative Humidity	0 - 95%
Storage Elevation	0-50000 feet (0-15000 meters)

## Conformance

Regulatory Approvals	cUL Recognized,UL 1449
Standard Warranty	Lifetime
Equipment protection policy	Lifetime : \$25000
UL 1449 TVSS Rating	330 V

\*Estimated Resale Price - Without Tax/VAT