


5.7" (145mm) BLDC Bypass Blower

250 Watt, 120 Volt High Flow

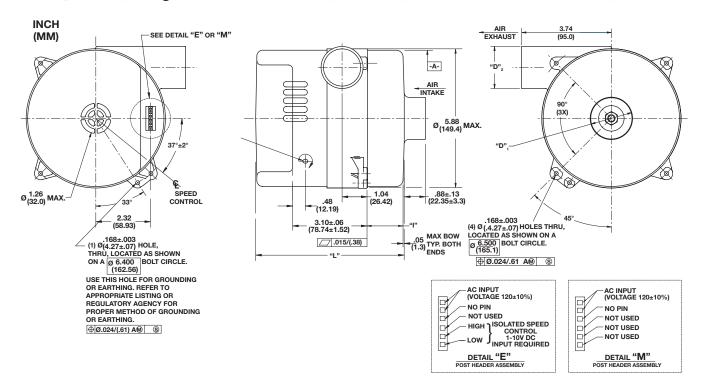

Blower Data	Unit of Measure	Part Number High Flow		
		Stages	-	1
Vacuum, Maximum (Sealed Vacuum)	in. H₂O	25.2	49.7	67.2
	mBar	62.8	123.6	167.3
Pressure, Maximum (Sealed Pressure)	in. H₂O	26.0	51.2	69.3
	mBar	64.5	127.0	171.8
Flow Rate, Maximum (Open Flow)	CFM	130.5	103.9	82.3
	m³/hr	221.8	176.6	139.9
Inlet/Outlet Diameter (Dimension "D" above)	inches	1.75	1.75	1.75
	mm	44.45	44.45	44.45
Length (Dimension "I" above)	inches	0.47	1.53	2.53
	mm	11.94	38.86	64.26
Length (Dimension "L" above)	inches	5.22	6.27	7.28
	mm	132.59	159.26	184.91

^{*} These part numbers are available through AMETEK Technical & Industrial Products' distributors.

NOTES:

- Nominal Input Voltage: 120 Volts AC RMS ±10%, 50/60Hz.
- Input Current: 5 amps AC RMS maximum.
- Temperature: Working Air: 0°C to 50°C; Ambient Air: 0°C to 50°C; Storage Air: -40°C to 85°C.
- Dielectric Testing: 1500 volts AC RMS 60Hz applied for one second between input pins and ground, 3mA leakage maximum.
- Speed Control: E (Electrical): Pulse Width Modulation or Analog input voltage (user supplied), 0 to 10 Volts DC nominal, 10mA maximum, 3 to 15 volts DC maximum. Access to sensitivity adjustment for 0 to 10 VDC speed control. (Ref. pin connection).


 M. (Machanical): A notantiomater is available for speed control of the blower. The potential prefer can be present for a specific speed. Access
 - M (Mechanical): A potentiometer is available for speed control of the blower. The potentiometer can be preset for a specific speed. Access to speed adjustment.
- Maximum Approximate Weight: 6 lbs.
- Regulatory Agency Certification: Underwriters Laboratories, Inc. is qualified per UL507 under File E-94403; Canadian Standards Association is qualified per C22.2#113 under File LR 43448.
- Miscellaneous: Intake and exhaust tubes, all cooling ducts, and vents must not be obstructed. Intake and exhaust are free of grease, oil, or foreign particles.
 Amp housing #640250-6 (to be supplied by customer), mates with post header assembly.
- Mating harness available upon request. Refer to page 136 for specific part numbers
- Optional Universal AC input version available with IntelliGen™ control (120-240 VAC input).
- Optional Tachometer output card available with IntelliGen™ controller.



5.7" (145mm) BLDC Bypass Blower

250 Watt, 120 Volt High Flow

TYPICAL PERFORMANCE

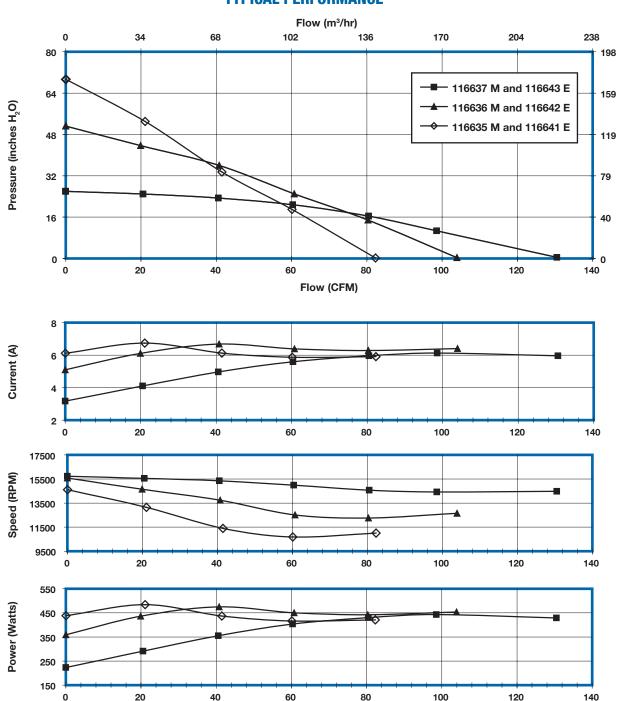

This document is for informational purposes only and should not be considered as a binding description of the products or their performance in all applications. The performance data on this page depicts typical performance under controlled laboratory conditions using AMETEK BLDC motor controllers. Actual performance will vary depending on the operating environment and application. AMETEK products are not designed for and should not be used in medical life support applications. AMETEK reserves the right to revise its products without notification. The above characteristics represent standard products. For product designed to meet specific applications, contact AMETEK Technical & Industrial Products Marketing and Sales.

AMETEK TECHNICAL & INDUSTRIAL PRODUCTS

627 Lake Street, Kent OH 44240

Tel: +1 330-673-3452 • Fax: +1 330-677-3306 • www.ametektip.com