| REV. | DATE | DESCRIPTION |
|---|---|---|
| NC | 08/27/98 | INITIAL RELEASE |
| A | 05/01/04 | UPDATE DRAWING FORMAT |

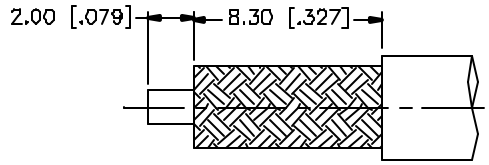


RECOMMENDED
CABLE STRIPPING DIM'S

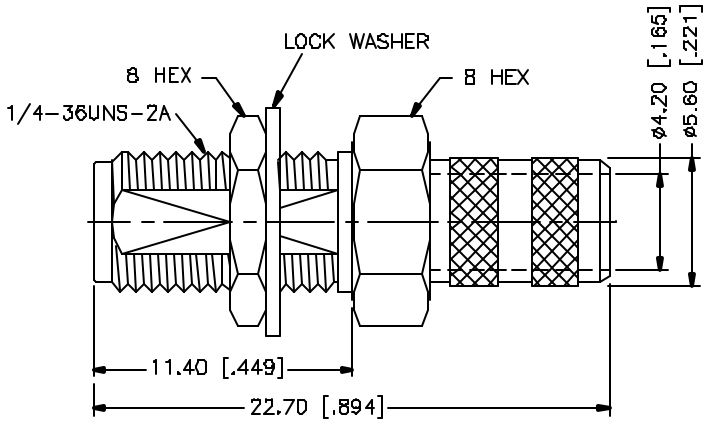


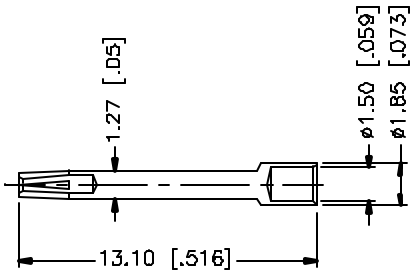


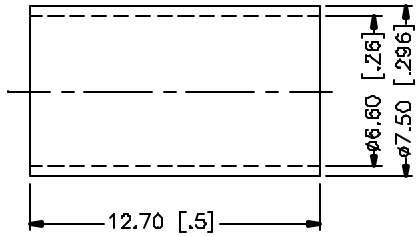





RECOMMENDED
MOUNTING HOLES

| | | | | |
|---|---|---|---|---|
| 8 | | | | |
| 7 | | | | |
| 6 | FERRULE | COPPER | GOLD | 1 |
| 5 | HEX NUT | BRASS | GOLD | 1 |
| 4 | LOCK WASHER | BRASS | GOLD | 1 |
| 3 | CONTACT PIN | BER. COPPER | GOLD | 1 |
| 2 | INSULATOR | TEFLON | NATURAL | 1 |
| 1 | BODY | BRASS | GOLD | 1 |
| | DESCRIPTION | MATERIAL | FINISH | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.60mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|---|---|
| DRAWN G.R.S. | 05/01/04 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |

CAD FILE C:/132/132241.DWG

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD CRIMP JACK
(FOR RG-8/X, LMR-240)

PART NO. 132241

| DWG. NO. | REV. | SIZE | SCALE |
|---|---|---|---|
| 132241.DWG | A | A | NA |