

- o Flat Cable Connectors SEK
- o *har-mik®*
- o D-Sub
- o InduCom

➔ Applications



Product details

09 03 178 6901


Printed board connector

Type	Type M
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	78 + 2 high current or coaxial contacts
Contact arrangement	Rows a, b and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 2 as per IEC 60603-2
Row pitch	2.54 mm
Board fixing	Without fixing
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes


Inquiry

Available Downloads

Alle Rechte vorbehalten/ All rights reserved

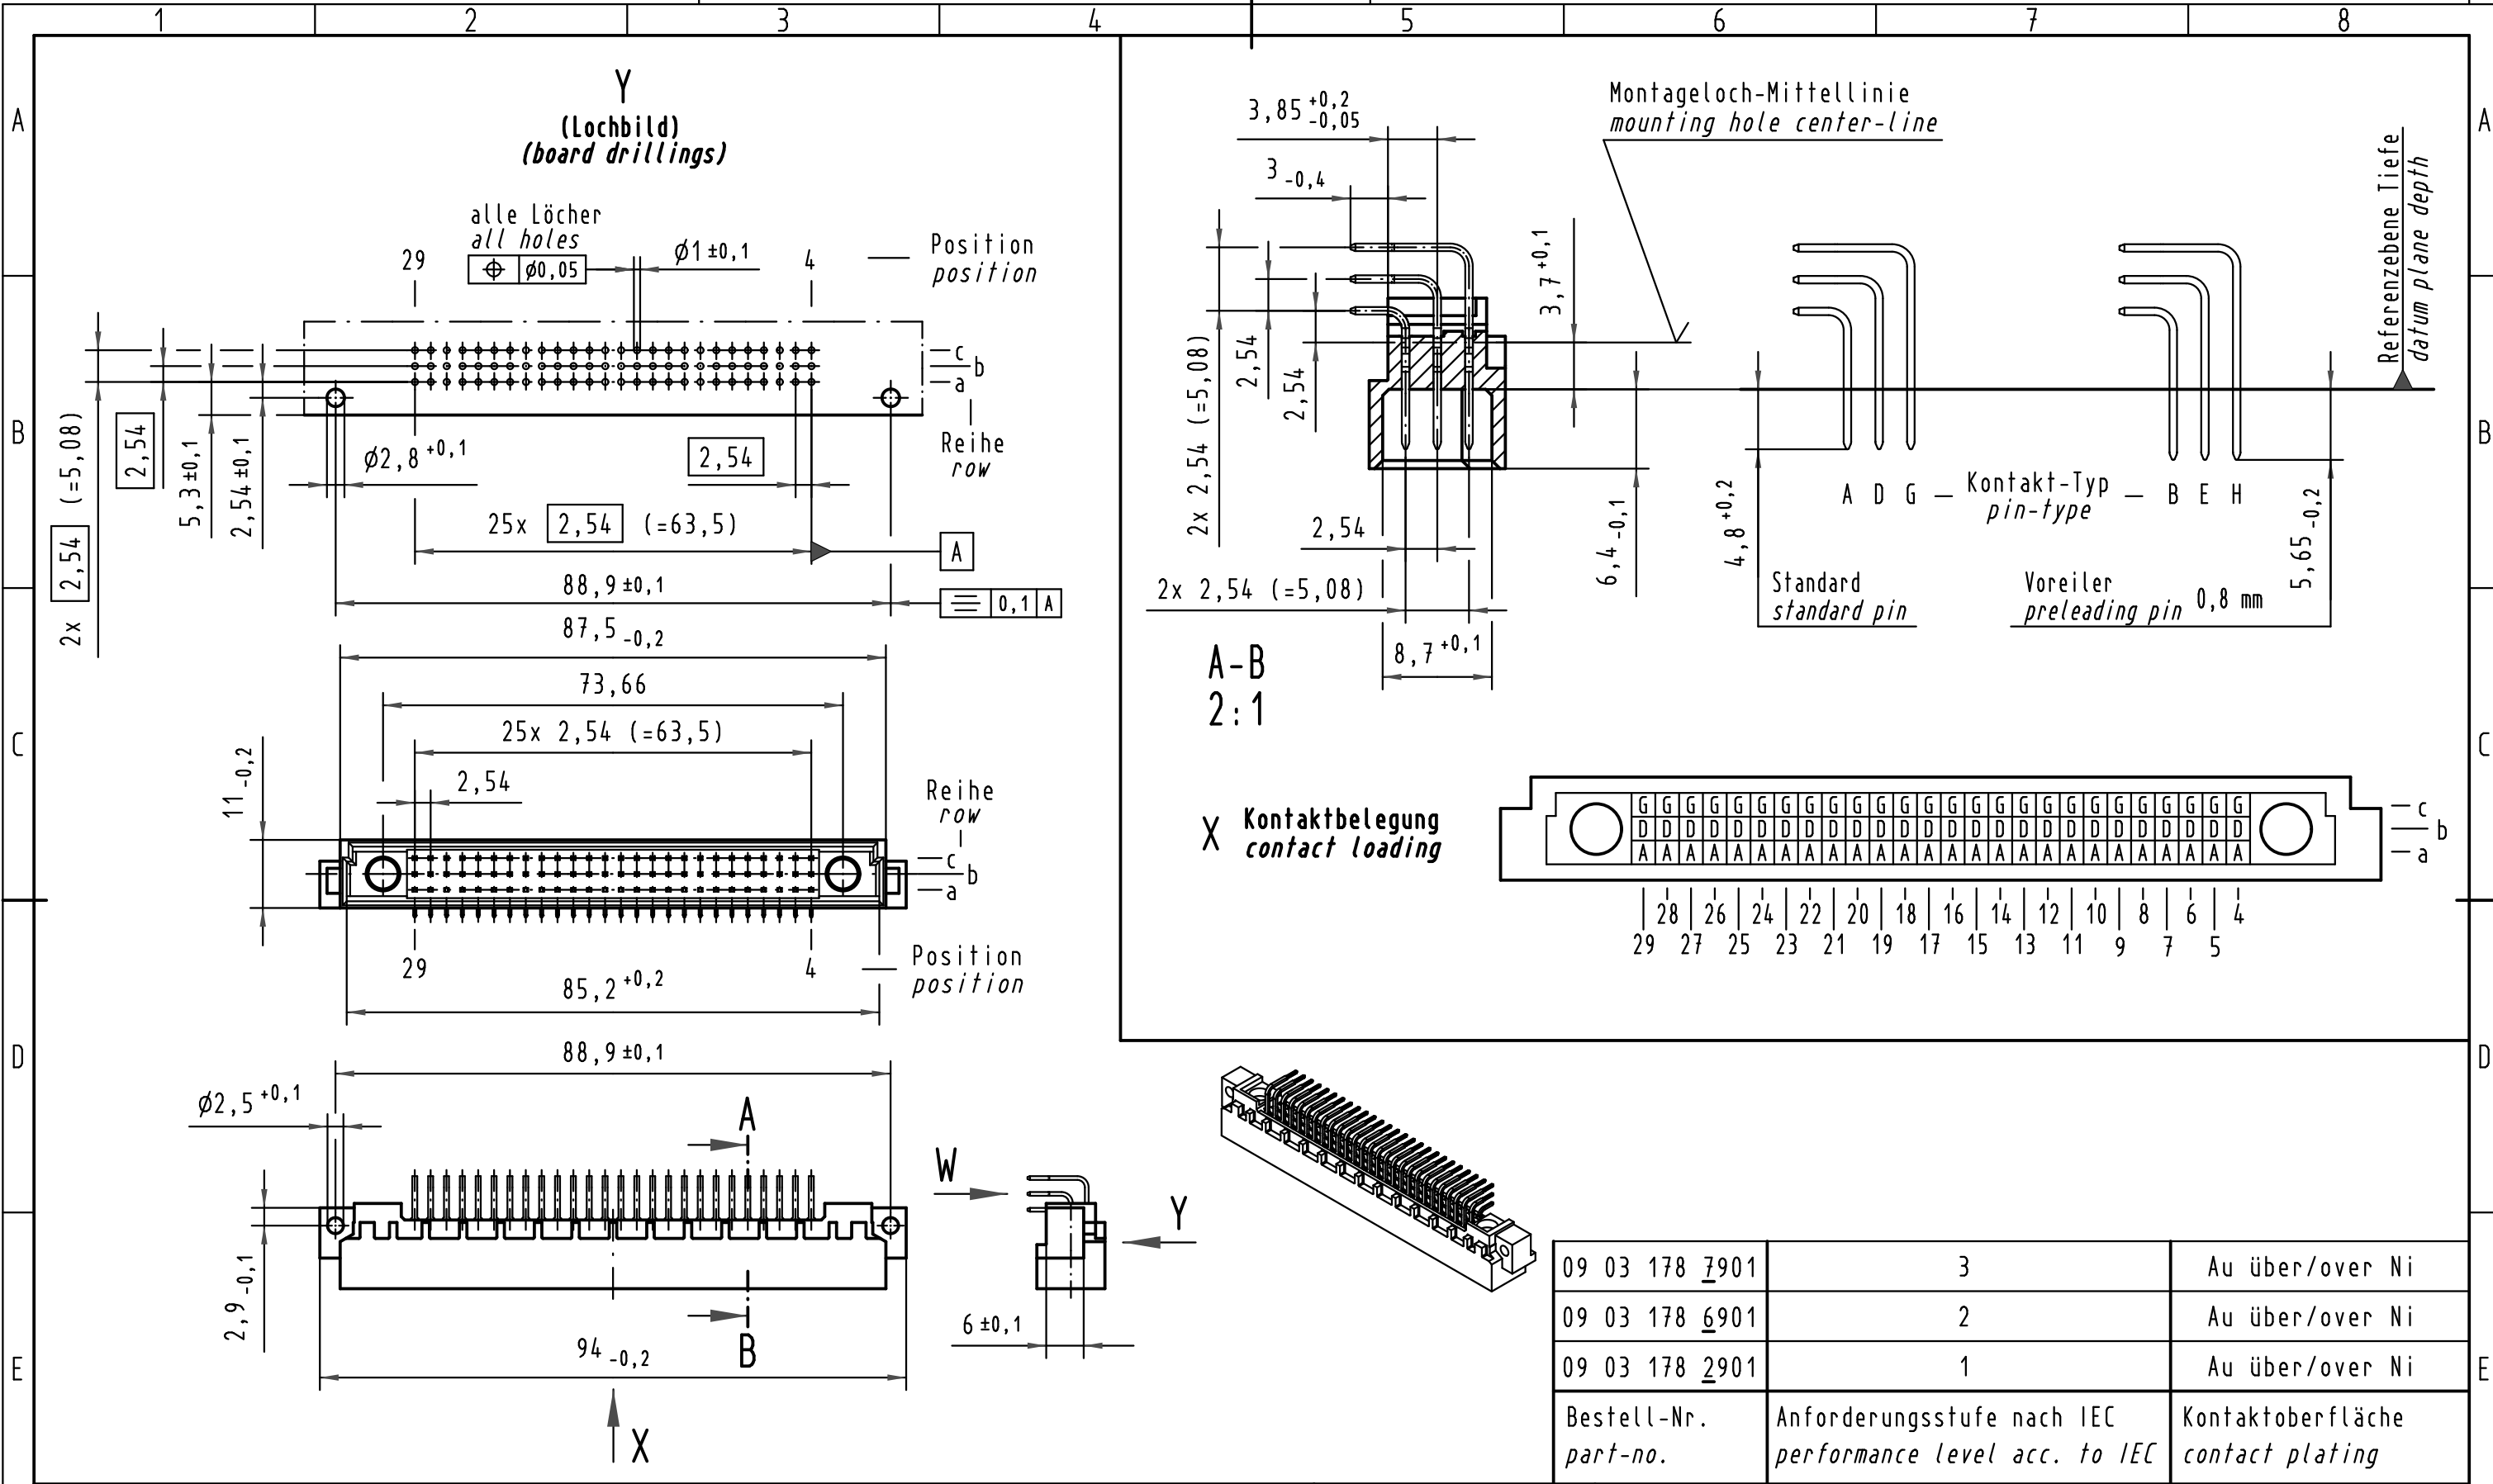

09 03 178 7901	3	Au über/over Ni
09 03 178 6901	2	Au über/over Ni
09 03 178 2901	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

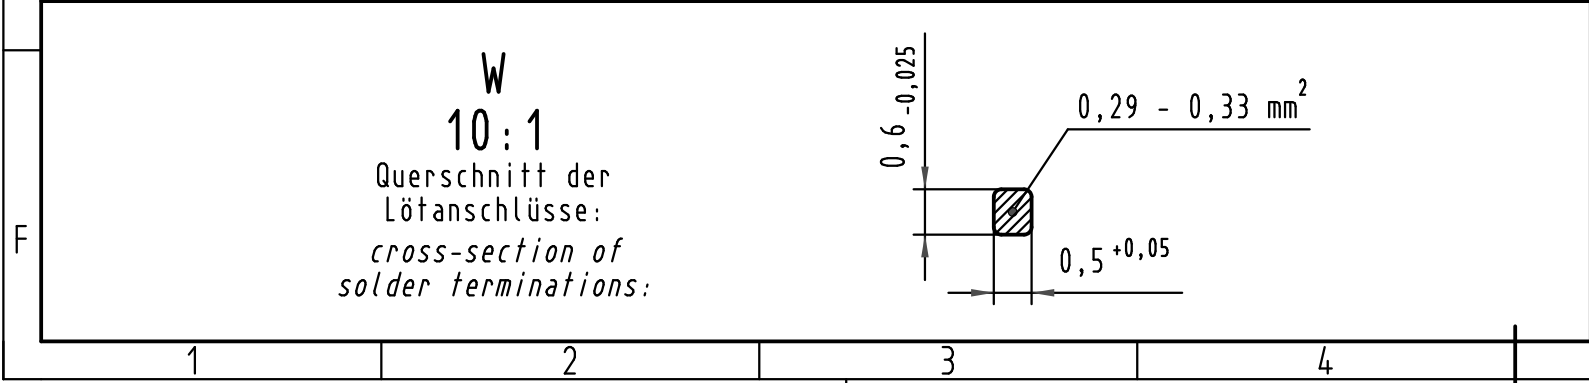

		Techn. Character.		Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
		Dat.	Name	Maßstab/Scale	
		Detail.	09.07.01 Rie.	1:1	
		Insp.	09.07.01 Pa.	2:1	
		Stand.		10:1	
34650	16.10.07	Hage.	HARTING Electronics GmbH & Co. KG		TB 09 03 178 x901
30007			D-32339 ESPELKAMP		
Mod.	Dat.	Name			
					Blatt/page
					Sub.