



Search

< Marsh Bellofram Group of Companies < Automatic Timing & Controls < Timer < 328D

328D Multi-Range Timer



- 1/8th DIN Package for panel mounting or plug-in
- Universal Operating Voltage 24VAC to 240VAC and 24VDC
- Output Relay DPDT 7A @ 120VAC
- Six Switch Selectable Ranges
1 Sec., 10 Secs., 1 Min., 10 Mins., 1 Hr., 10 Hrs.
- On-Delay - Off-Delay Interval Modes
(selected by wiring on mounting socket)
- 11-Pin blade base
- Cycle Progress LED



Purchase Details:

Product Contact:

Sales Contact **Technical Contact**

Specifications:

| | |
|---------------------------|---|
| Models | One model provides all ranges and control modes. 328D200F10XX Six switch-selected ranges: 1 sec. 10 sec. 1 min. 10 min. 1 hr. 10 hr. |
| Range | |
| Minimum Setting | 2% of range, except 50 ms on 1 sec. range. |
| Load Relay | Type DPDT Life 100,000,000 operations (no load) AC-10 A (resistive) at Contact Rating 125-250V. 1/8 HP DC 10A at 30 VDC. |
| Temperature Rating | 0° to 140° F (-18° to 60°C) |

Downloadable Files:

[328D Series](#)

Product Detail:

A versatile dial-adjustable time delay relay, the ATC 328 provides a choice of ON-delay, OFF-delay or interval operation for any timing period between 50 mSec and 10 hours...all in the same timer. Based on a unique digital circuit, it features cycle progress annunciation and is suitable for the most demanding industrial service.

Designed for Industrial Service: With a load relay that is rated for 100,000,000 mechanical operations, and power supply that protects circuit components against the voltage transients that are typical of industrial plants, the 328 has a long life expectancy even in tough environments.

Cycle Progress Indication: The 328's LED annunciator provides a unique and extremely effective method of cycle progress indication. Off before timing, the LED blinks at an ever-increasing rate as the cycle progresses: once every 3-1/2 seconds during the first 10% of the cycle, twice during the second 10%, and so on. At time-out, the LED stays on constantly, pulsing at a high rate. (In the 1 and 10-second ranges, the LED is off before timing, steady on during timing, and pulsing on after time-out.)

Versatile Mounting: The standard 328 has an 11-pin base which accepts push-on connectors or plugs into a surface-mounted socket. Since all connections are made to the socket, the 328 is readily removed without disturbing the wiring. It is also available with an optional quick-connect plug and brackets for flush panel-mounting.

Multiple Ranges Reduces Inventory: Because the 328 has six switch-selected ranges—from 1 sec to 10 hours—each timer can provide any dial-adjustable timing period between 50 ms and 10 hours...thus greatly reducing inventory requirements especially for large users. The range selector switch knob can be easily removed to prevent unauthorized range change.

High Accuracy: The 328's digital circuit maintains rated accuracy from cycle to cycle, regardless of reset time. Its oscillator-based circuit is also effectively compensated for changes in temperature and voltage and thus achieves excellent overall accuracy.

Versatile Control Capability: Every 328 can be used for either On-Delay, Off-Delay or interval operation, depending on how its terminal block is wired.

Part Numbers:

| | | | | | |
|---|------|-----|---|----|-------------|
| Create Model Number >>>>> | 328D | 200 | F | | |
| Range | | | | | |
| Six Knob Selectable Ranges (1 or 10 Sec/Min/Hrs) | | 200 | | | |
| Voltage & Frequency | | | | | |
| 24 VAC to 240 VAC and 24 VDC | | | F | | |
| Arrangement | | | | | |
| Reset on power failure | | | | 10 | |
| Special, use K in features | | | | | 00 |
| Features | | | | | |
| | | | | | Standard XX |
| | | | | | Special XK |

Options:

| Accessories | |
|--|----------------|
| Surface Mounting Socket with hold down clips | 0000-825-69-00 |
| DIN Rail Socket | 0000-825-89-00 |
| Panel Mounting Plug-In Socket | 0328-260-01-00 |
| Panel Mounting Kit Consisting of Gasket & 2 Clamps | 0328-260-02-00 |

Mounting

11 blade case plugs into matching socket with 11 screw terminals; blades also accept 0.187 in. push-on connectors.

OPTIONAL: kit provides 11-pin plug-in socket and 2 brackets for flush panel mounting.

24 VAC to 240 VAC and 24 VDC

Power Requirements

(+10%, -20%)
AC 50/60Hz
(+20%, -20%)
DC

Setting Accuracy

Maximum Ripple @ 100 Hz-5%

10% of range

Repeat Accuracy

Varies with changes in line voltage and ambient temperature but not with reset time: ±0.5% of setting or 15 mSec over the entire voltage and temperature range

Timing Modes

On-Delay/Off-Delay/Interval

Indicator

Timing LED

On-Delay 100 mSec max.

Reset Time

Off-Delay 50 mSec max.

Interval 100 mSec max.

Housing

Plug-in design; dust, moisture and impact-resistant molded plastic case. DIN size (48mm x 96mm)

Weight

NET: 7 oz. SHIPPING: 1 lb.

328D Series

A versatile dial-adjustable time delay relay, the ATC 328 provides a choice of ON-delay, OFF-delay or interval operation for any timing period between 50 mSEC and 10 hours—all in the same timer. Based on a unique digital circuit, it features cycle progress annunciation and is suitable for the most demanding industrial service.

DESIGNED FOR INDUSTRIAL SERVICE: With a load relay that is rated for 100,000,000 mechanical operations, and power supply that protects circuit components against the voltage transients that are typical of industrial plants, the 328 has a long life expectancy even in tough environments.

CYCLE PROGRESS INDICATION: The 328's LED annunciator provides a unique and extremely effective method of cycle progress indication. Off before timing, the LED blinks at an ever-increasing rate as the cycle progresses: once every 3-1/2 seconds during the first 10% of the cycle, twice during the second 10%, and so on. At time-out, the LED stays on constantly, pulsing at a high rate. (In the 1 and 10-second ranges, the LED is off before timing, steady on during timing, and pulsing on after time-out.)

VERSATILE MOUNTING: The standard 328 has an 11-pin base which accepts push-on connectors or plugs into a surface-mounted socket. Since all connections are made to the socket, the 328 is readily removed without disturbing the wiring. It is also available with an optional quick-connect plug and brackets for flush panel-mounting.

MULTIPLE RANGES REDUCES INVENTORY: Because the 328 has six switch-selected ranges—from 1 SEC to 10 hours—each timer can provide any dial-adjustable timing period between 50 ms and 10 hours—thus greatly reducing inventory requirements especially for large users. The range selector switch knob can be easily removed to prevent unauthorized range change.

HIGH ACCURACY: The 328's digital circuit maintains rated accuracy from cycle to cycle, regardless of reset time. Its oscillator-based circuit is also effectively compensated for changes in temperature and voltage and thus achieves excellent overall accuracy.

VERSATILE CONTROL CAPABILITY: Every 328 can be used for either **ON-Delay**, **OFF-Delay** or interval operation, depending on how its terminal block is wired.



Multi-Range Timer

| | | | | | |
|--|----------------|-----|---|--|--|
| MODEL NUMBER >>>>>> | 328D | 200 | F | | |
| Range | | | | | |
| Six Knob Selectable Ranges (1 or 10 SEC/MIN/HR) | 200 | | | | |
| Voltage & Frequency | | | | | |
| 24 VAC to 240 VAC and 24 VDC | F | | | | |
| Arrangement | | | | | |
| Reset on power failure | 10 | | | | |
| Special, use K in features | 00 | | | | |
| Features | | | | | |
| Standard | XX | | | | |
| Special | XK | | | | |
| Accessories | | | | | |
| Surface Mounting Socket with hold down clips | 0000-825-69-00 | | | | |
| DIN Rail Socket | 0000-825-89-00 | | | | |
| Panel Mounting Plug-In Socket | 0328-260-01-00 | | | | |
| Panel Mounting Kit Consisting of Gasket and 2 Clamps | 0328-260-02-00 | | | | |

OPERATIONS


Control action of the 328 depends on how its terminal block is wired (see Wiring diagrams.)

In **ON-DELAY OPERATION**, timing begins when the start switch is closed. The load relay contacts transfer at the end of the timed period. Reset occurs when the start switch is opened or when there is a power interruption.

In **OFF-DELAY OPERATION**, timing begins when the start switch is opened. The load relay contacts transfer at the end of the timed period and back again at reset. Reset occurs when the start switch is closed. Control action of all loads is delayed, either closed-closed-open or open-open-closed.

In interval control, timing begins when the start switch is closed. The load relay contacts transfer at the beginning and at the end of the timed period, thus providing true interval control, either open-closed-open or closed-open-closed. The start signal may be either sustained or momentary; in the latter case, the start signal is "latched in" by wiring it to one of the load relay's two sets of contacts. Power interruption resets the timer.

WIRING

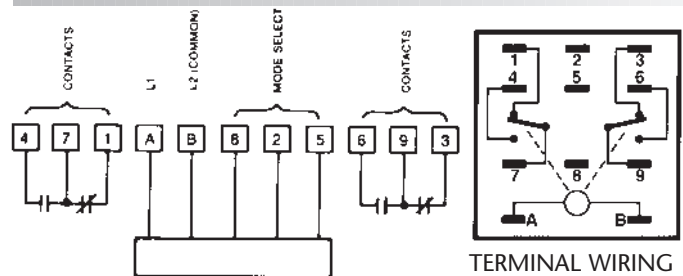


The 328D Directly Replaces 328A, 328B, and 328C.

SPECIFICATIONS

| | | |
|--------------------|--|--|
| MODELS | One model provides all ranges and control modes. 328D200F10XX | |
| RANGE | Six switch-selected ranges: | |
| | 1 SEC | |
| | 10 SEC | |
| | 1 MIN | |
| | 10 MIN | |
| | 1 HR | |
| MINIMUM SETTING | 2% of range, except 50 ms on 1 SEC range. | |
| LOAD RELAY | TYPE | DPDT |
| | LIFE | 100,000,000 operations (no load) |
| LOAD RELAY | CONTACT RATING | AC-10 A (resistive) at 125-250V. 1/8 HP DC 10A at 30 VDC. |
| | TEMPERATURE RATING | 0° to 140° F (-18°C to 60°C) |
| MOUNTING | 11 blade case plugs into matching socket with 11 screw terminals; blades also accept 0.187 in. push-on connectors. | |
| | OPTIONAL: kit provides 11-pin plug-in socket and 2 brackets for flush panel mounting. | |
| POWER REQUIREMENTS | 24 VAC to 240 VAC and 24 VDC | |
| | AC | (+10%, -20%) 50/60Hz |
| | DC | (+20%, -20%) |
| | Maximum Ripple @ 100 Hz-5% | |
| SETTING ACCURACY | 10% of range | |
| REPEAT ACCURACY | Varies with changes in line voltage and ambient temperature but not with reset time: ±0.5% of setting or 15 mSEC over the entire voltage and temperature range | |
| TIMING MODES | ON-Delay/OFF-Delay/Interval | |
| INDICATOR | Timing LED | |
| RESET TIME | ON-DELAY | 100 mSEC max. |
| | OFF-DELAY | 50 mSEC max. |
| | INTERVAL | 100 mSEC max. |
| HOUSING | Plug-in design; dust, moisture and impact-resistant molded plastic case. DIN size (48mm x 96mm) | |
| WEIGHT | NET: 7 oz. | SHIPPING: 1 lb. |

DIMENSIONS (INCHES/MILLIMETERS)

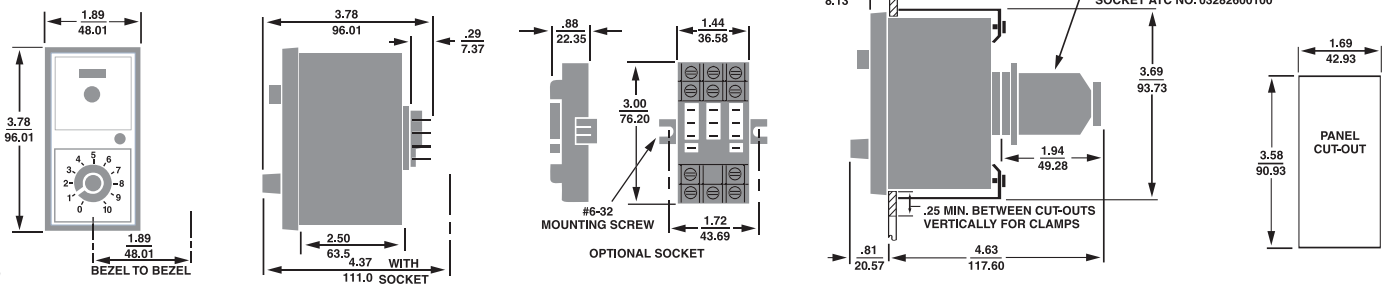

TYPICAL INSTALLATIONS


KEY SYMBOLS

- TIMING CIRCUIT
- INDEPENDENT LOADS
- DEPENDENT LOADS
- MOMENTARY STARTING CONTACT
- SUSTAINED STARTING CONTACT
- LOAD ENERGIZED
- LOAD DE-ENERGIZED


All timers shown in "before start" position. Diagrams shown with power off unless otherwise marked.

Maximum load current through any load carrying contact is 7 amperes.


DELAY-ON-MAKE

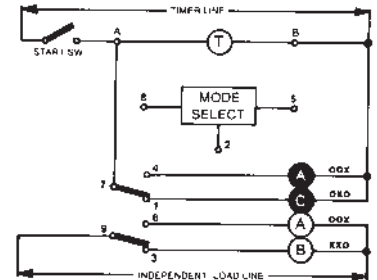

ONE-SHOT

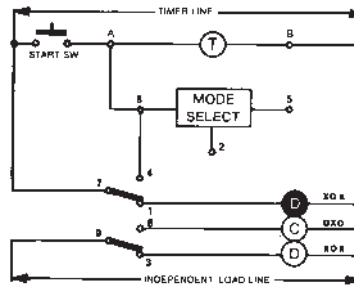

OFF-DELAY (SHOWN WITH POWER ON)

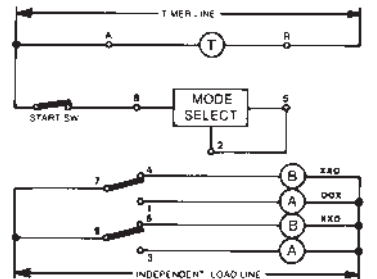

INTERVAL

