



| Sensing Mode                        |                           | Range                  | Output | Model*       |
|-------------------------------------|---------------------------|------------------------|--------|--------------|
| 875 nm Infrared                     | Opposed                   | 60 m (200')            | -      | QS303E       |
| Effective Beam:<br>18 mm (0.7")<br> |                           |                        |        | QS30VR3R     |
| 630 nm Visible Red                  | Polarized Retroreflective | 8 m (26') <sup>†</sup> | SPDT   | QS30VR3LP    |
|                                     |                           |                        |        | QS30VR3FF200 |
| 680 nm Visible Red                  | Fixed-Field               | 200 mm (8")            |        | QS30VR3FF400 |
|                                     |                           | 400 mm (16")           |        | QS30VR3FF600 |
|                                     |                           | 600 mm (24")           |        |              |


\*Only standard 2 m (6.5') cable models are listed. For 9 m (30') integral cable, add suffix "W/30" to the model number (e.g., **QS303E W/30**).

**QD models:** Contact Factory for availability.


<sup>†</sup> Range is measured using a model **BRT-84** retroreflector.

**Hookups**


**Emitters**

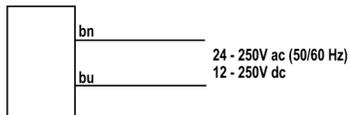

**All Other Models**

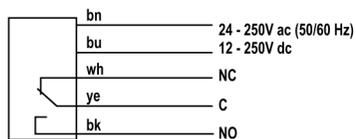

**Dimensions**

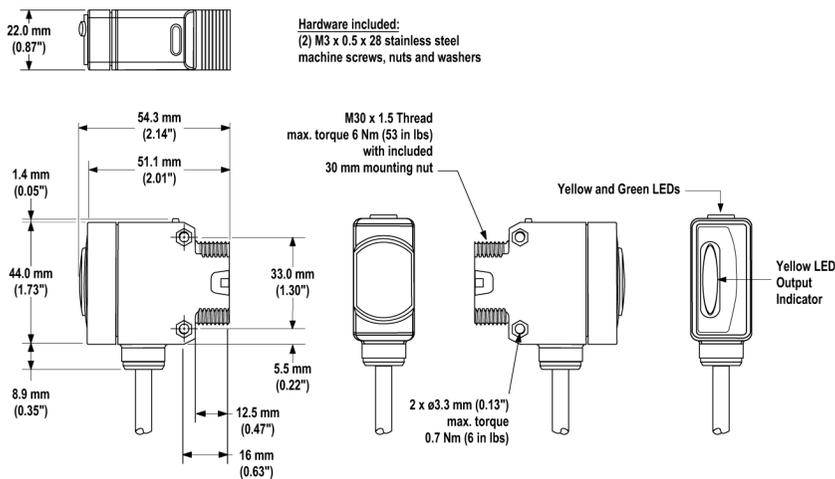

**WARNING . . . Not To Be Used for Personnel Protection**

**Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death.** These sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition. Consult your current Banner Safety Products catalog for safety products which meet OSHA, ANSI and IEC standards for personnel protection.

# WORLD BEAM® QS30 – Universal Voltage

## Specifications

### Supply Voltage and Current

**Universal Voltage:** 24 to 250V ac, 50/60 hz or  
12 to 250V dc (1.0 watt maximum)

### Supply Protection Circuitry

Protected against transient voltages

### Output Configuration

SPDT (Single-Pole Double-Throw) electromechanical relay output  
(all models except emitters)

### Output Rating

**Max. Switching Power (resistive load):** 150 W, 1250 VA

**Max. Switching Voltage (resistive load):** 250V ac; 125V dc

**Max. Switching Current (resistive load):**

5 A @ 250V ac

5 A @ 30V dc derated to 200 mA @ 125V dc

**Min. Voltage and Current:** 5V dc, 10 mA

**Mechanical life of relay:** 50 million operations

**Electrical life of relay at full resistive load:** 100,000 operations

### Output Response Time

15 milliseconds ON and OFF

NOTE: 100 millisecond delay on power-up; output does not conduct during this time.

### Cutoff Point Tolerance

**Fixed-Field Only:**  $\pm 5\%$  of nominal cutoff distance

### Indicators

2 LED indicators on sensor top:

**Green ON steady:** Power ON

**Yellow ON steady:** Light sensed

**Yellow flashing:** Marginal excess gain (1.0 to 1.5x excess gain)

Large, oval LED indicator on sensor back (except emitters):

**Yellow ON steady:** Normally open output is conducting

### Construction

ABS housing, rated IEC IP67; NEMA 6; Acrylic lens cover

### Connections

2 m (6.5') or 9 m (30') 5-wire PVC cable

### Operating Conditions

**Temperature:** -20° to +70° C (-4° to +158° F)

**Relative Humidity:** 90% @ 50° C (non-condensing)

### Certifications



**WARRANTY:** Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.