


REV.	ECO NO.	DESCRIPTION	RELEASED BY	DATE
A	3120	INITIAL RELEASE		

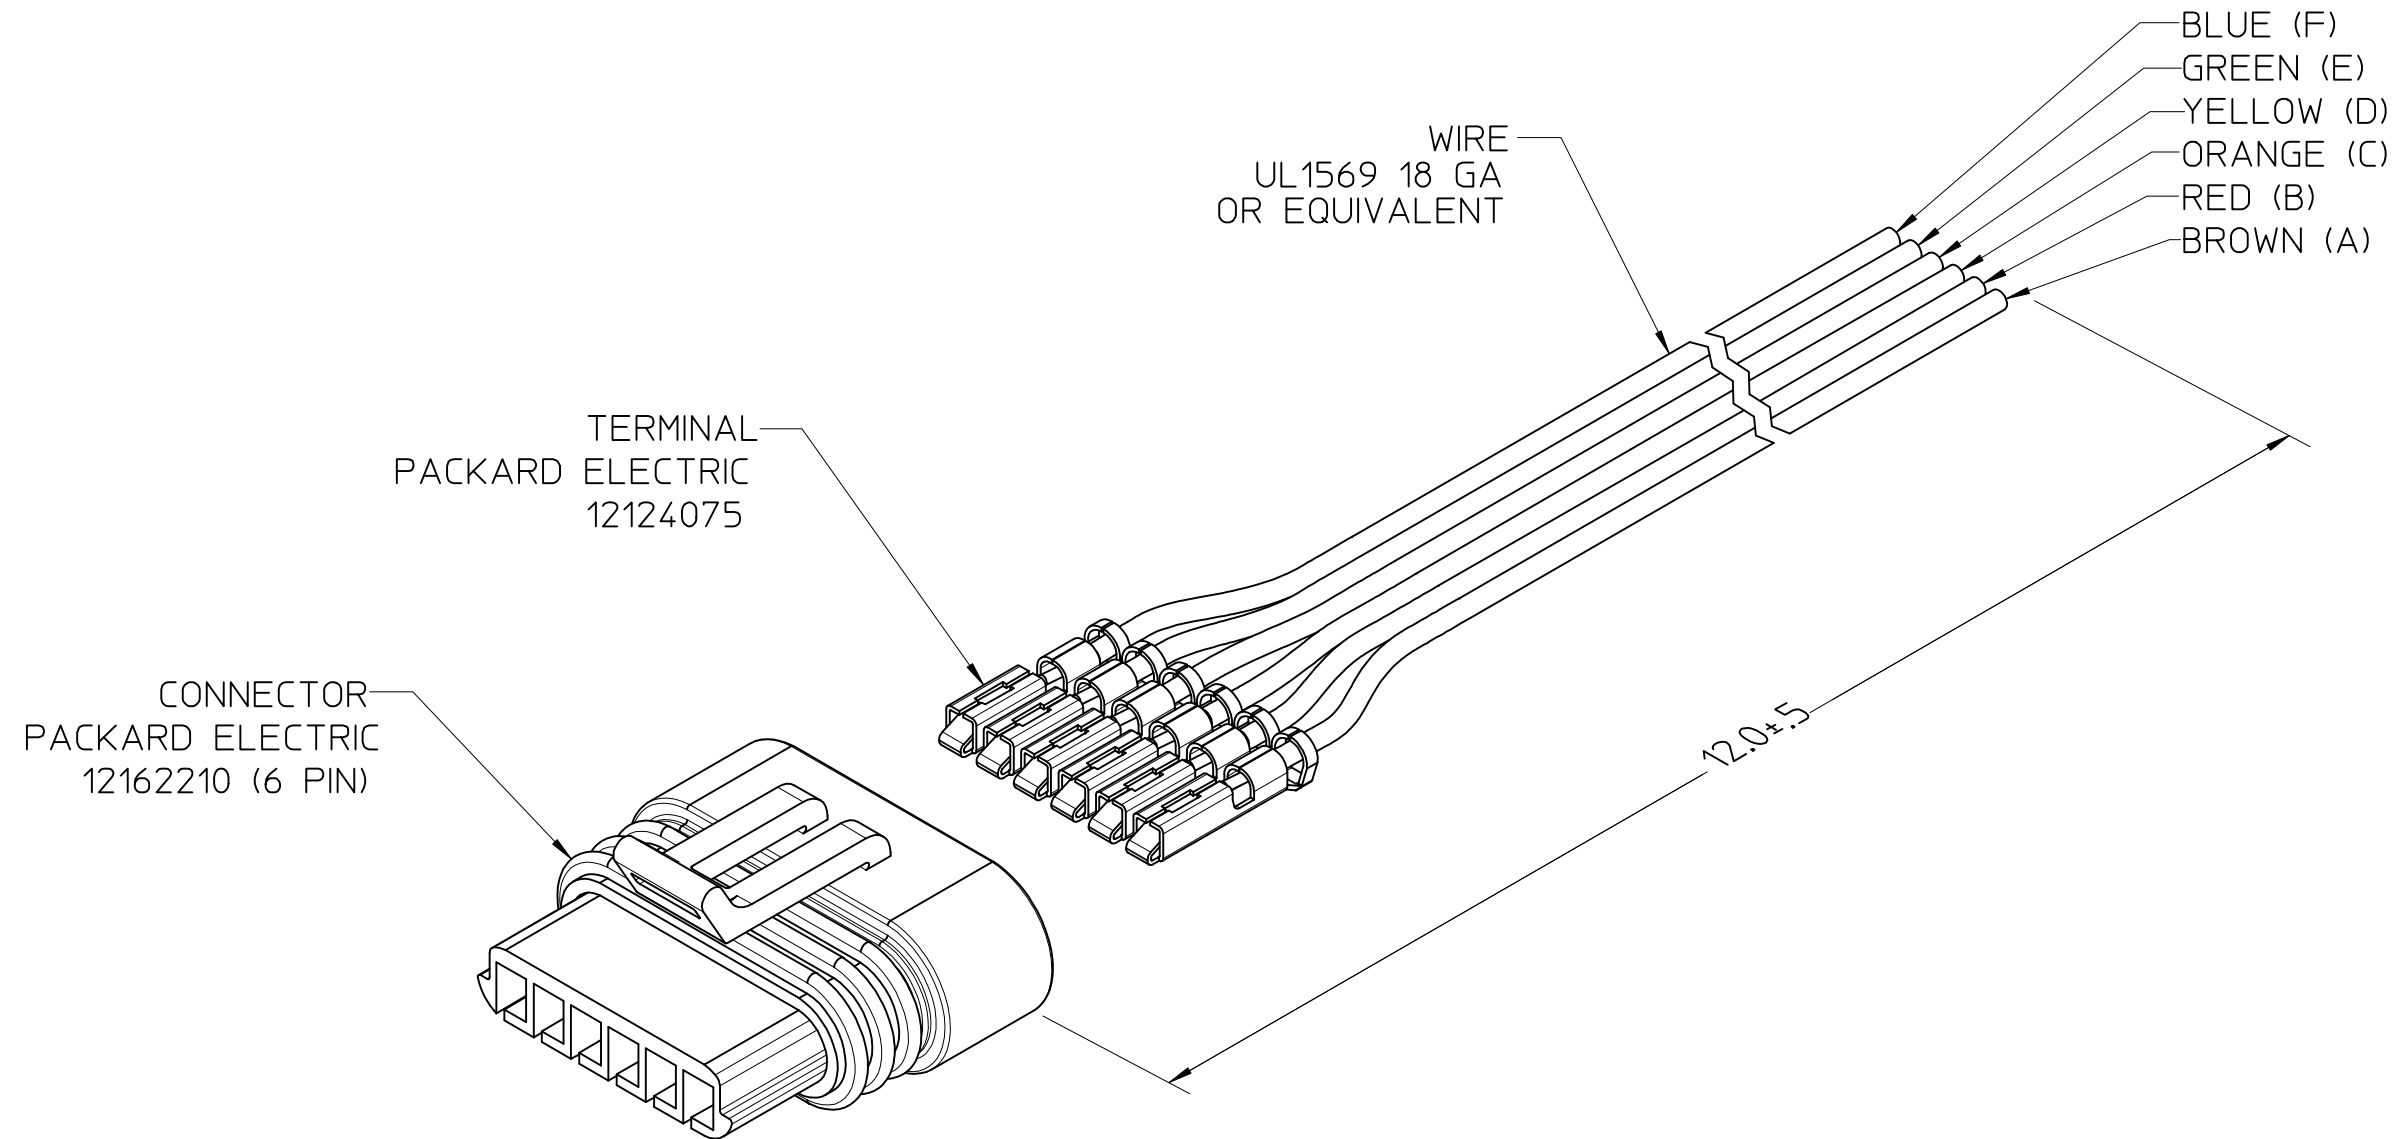

PURCHASED ASSY

1. EXPLODED VIEW SHOWN FOR CLARITY.

C IDENTIFIES FEATURES THAT ARE DESIGNATED SIGNIFICANT BY CUSTOMER.

SIG IDENTIFIES FEATURES THAT SIGNIFICANTLY AFFECT FIT OR FUNCTION AND WHICH REQUIRE ADDITIONAL CONTROL PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

SPC IDENTIFIES FEATURES THAT SHALL BE MONITORED FOR PROCESS CONTROL AND FOR WHICH STATISTICAL DATA SHALL BE SUBMITTED PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

NOTES: UNLESS OTHERWISE SPECIFIED

This document and all information contained herein are proprietary and are the sole property of BEI Duncan Electronics Division and shall not be reproduced or disclosed without written authorization. Use of this information for the purpose of manufacture does not constitute the release of the proprietary rights thereto.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES PER ASME Y14.5M		 THIRD ANGLE PROJECTION		BEI DUNCAN ELECTRONICS DIVISION BEI TECHNOLOGIES, INC. DUNCAN ELECTRONICS DIVISION, 15771 RED HILL AVENUE, TUSTIN, CA 92780-7303	
TOLERANCES ARE :		APPROVALS	DATE	TITLE	
DECIMALS	ANGLES	TRUONG	03/Sep/02	CABLE ASSY MODEL 9860	
.XX	± 1°	CHECKED			
.XXX	±.005	DESIGN ENG.		SIZE	CAGE CODE
.XXXX	±.0005	ENG. APPROVAL		B	11534
DIAMETERS SHOWN ON COMMON CENTERS <input checked="" type="checkbox"/> .005				DWG NO.	REV.
FEATURES SHOWN ON COMMON CENTERS <input checked="" type="checkbox"/> .005				1-173	A
INSIDE/OUTSIDE RADIUS .005 MAX.				SCALE	PAGE 1 OF 1
DO NOT SCALE DRAWING				2X	