



Data sheet

Digital Storage Oscilloscopes Models 2534, 2540 & 2542

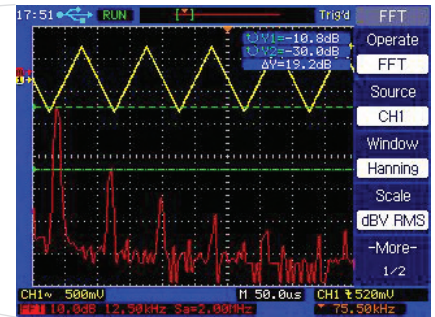

FFT spectrum analysis screen

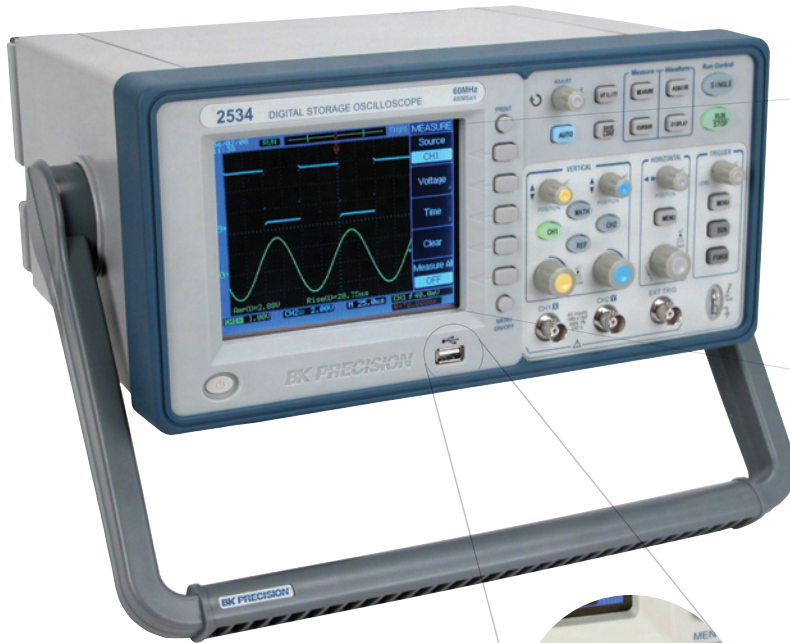

FULL FEATURED OSCILLOSCOPES THAT WON'T BREAK YOUR BUDGET

Models 2534, 2540 & 2542 dual channel Digital Storage Oscilloscopes deliver an unmatched combination of performance and value. Analog style controls combined with an Auto measurement function make these oscilloscopes easy to use. Advanced features such as FFT function, digital filtering, waveform recorder, delayed sweep/zoom, mask testing and automatic measurements provide you with powerful tools to debug your circuits.

The oscilloscopes come with PC Software that lets you easily capture, save and analyze waveforms and measurement results. Unlike other DSOs in this price category, each model includes two 150 MHz high performance passive probes that will not limit the bandwidth of your measurement system.

The 2534, 2540 & 2542 are ideal oscilloscopes for use in education and training, design and debug, service and repair.

Model	Bandwidth	Sample Rate
2534	60 MHz	400 MSa/s
2540	60 MHz	1 GSa/s
2542	100 MHz	1 GSa/s

Features

- 60 MHz & 100 MHz bandwidth, 1 GSa/s real time sample rate
- 4000 point record length for each channel
- Color LCD display
- USB front panel host port for USB flash drives standard
- USB device interface standard
- Advanced features include digital filter with adjustable limits, mask testing and waveform recorder/replay mode
- 24 automatic measurements
- FFT standard plus 3 additional math functions
- Extensive Trigger capabilities including pulse width and line-selectable video trigger
- Multiple language interface
- PC Software that lets you remotely control the oscilloscope and capture, save and analyze waveform data

Digital Storage Oscilloscopes
Models 2534, 2540 & 2542

Specifications		model		
		2534	2540	2542
Performance Characteristics				
Bandwidth	60 MHz	60 MHz	100 MHz	
Real time sample rate (2 channels interleaved)	400 MSa/s	1 GSa/s		
Channels	2			
Display	5.7 inch (145 mm) diagonal Color LCD			
Rise Time	<5.83 ns	<5.83 ns	<3.50 ns	
Record Length	4000 points			
Vertical Resolution	8 bits			
Vertical Sensitivity	2 mV - 5 V/div			
DC gain accuracy	±3.0 %			
Maximum Input Voltage	400 Vpk, CAT II (between signal and reference BNC connector)			
Position Range	± 8 divisions from center of screen			
Bandwidth Limit	20 MHz			
Time Base range	2.5 ns/div – 50 s/div (2534) 2 ns/div – 50 s/div (2540 & 2542)			
Timebase accuracy	100 ppm			
Input Coupling	AC, DC, GND			
Input Impedance	1 MΩ in parallel with 19 pf			
Vertical and Horizontal Zoom	Vertically or horizontally expand or compress a live or stopped waveform			
I/O interface	USB host port on front panel supports USB flash drives. USB device port for connection to PC (Requires included Comsoft Software for use)			
Acquisition Modes				
Sample	Display sample data only			
Peak Detect				
Average	Waveform averaged, selectable from 2, 4, 16, 32, 64, 128, 256			
Roll Mode	For time base settings 500 ms/div-50 s/div			
Trigger System				
Trigger Types	Edge, Pulse Width, Video*			
Trigger Modes	Auto, Normal, Single			
Trigger Coupling	AC, DC, LF reject, HF reject			
Trigger Source	CH1, CH2, AC line, Ext, Ext/5			
*Support formats PAL/SECAM, NTSC. Triggers on odd or even field, all lines or line number				
Cursors				
Types	Amplitude, Time			
Measurements	ΔV, ΔT, 1/ΔT			

Automatic Waveform Measurement	
Time	Rise time, Fall Time, Cycle Frequency, Period, Positive Pulse Width, Negative Pulse width, Delay, Phase, X at Min, X at Max
Voltage	MAX, MIN, Peak-Peak, Average, Vrms, High, Low, Amplitude, Cycle RMS, Cycle Average, Overshoot, Preshoot
Frequency	Hardware counter provides frequency readout of trigger source with 5 digit resolution
Waveform Math	
Math function	FFT, add, subtract, multiply, divide
FFT	Windows: Hanning, Hamming, Blackman, Rectangular, Flattop, 2048 sample points
Autoset	
Single button automatic setup of both channels for vertical, horizontal and trigger systems	
Display	
Display Mode	1/4 VGA (5.7") 256 color LCD (320x240) with adjustable contrast and inverse video
Display Types	Point, Vector
Persistence	Off, infinite
Waveform Interpolation	Sin(x)/x, Linear
Format	YT and XY
Power Requirements	
100-240 VAC, 50 VAmx, 47 Hz to 440 Hz	
Environmental	
Temperature	Operating: 0° C to +40° C Nonoperating: -20° C to +55° C
Humidity	Operating: 95 % RH, 40° C Nonoperating: 90 % RH, 55° C
Altitude	Operating to 3000 m
Pollution Degree	Pollution degree 2 for indoor use only.
Electromagnetic compatibility and Safety	
EMC	This oscilloscope is in compliance with council EMC directive 2004/108/EC
Safety	EN61010-1:2001
General	
Dimensions	310 mm (W) x 147 mm (H) x 269 mm (D)
Width x Height x Depth	12.2 in x 5.8 in x 10.6 in
Weight	3.6 kg (8 lbs)
Two Year Warranty	
Accessories	
Supplied: User Manual, Two 150 MHz 10:1 passive probes (model PR 37A), Power cord , USB interface cable, Comsoft Software Installation disk	
Optional: PR 32A Demodulator Probe, PR 55 High Voltage Probe	