

PART NAME NEMA 4X ENCLOSURE


PART No. PNR-2605, PNR-2605-C, PNR-2605-DG
PNR-2606, PNR-2606-C, PNR-2606-DG

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

INDUSTRY STANDARDS:

POLYCARBONATE
(LIGHT GRAY AND CLEAR)
UL 94V-2 FLAMMABILITY
RATING (UL FILE #E41613)
UV STABILIZED
SERVICE TEMPERATURE
RANGE: -40°C TO +120°C

ABS (DARK GRAY)
UL 94-HB FLAMMABILITY RATING
(UL FILE #E56070)
SERVICE TEMPERATURE
RANGE: -40°C TO +80°C

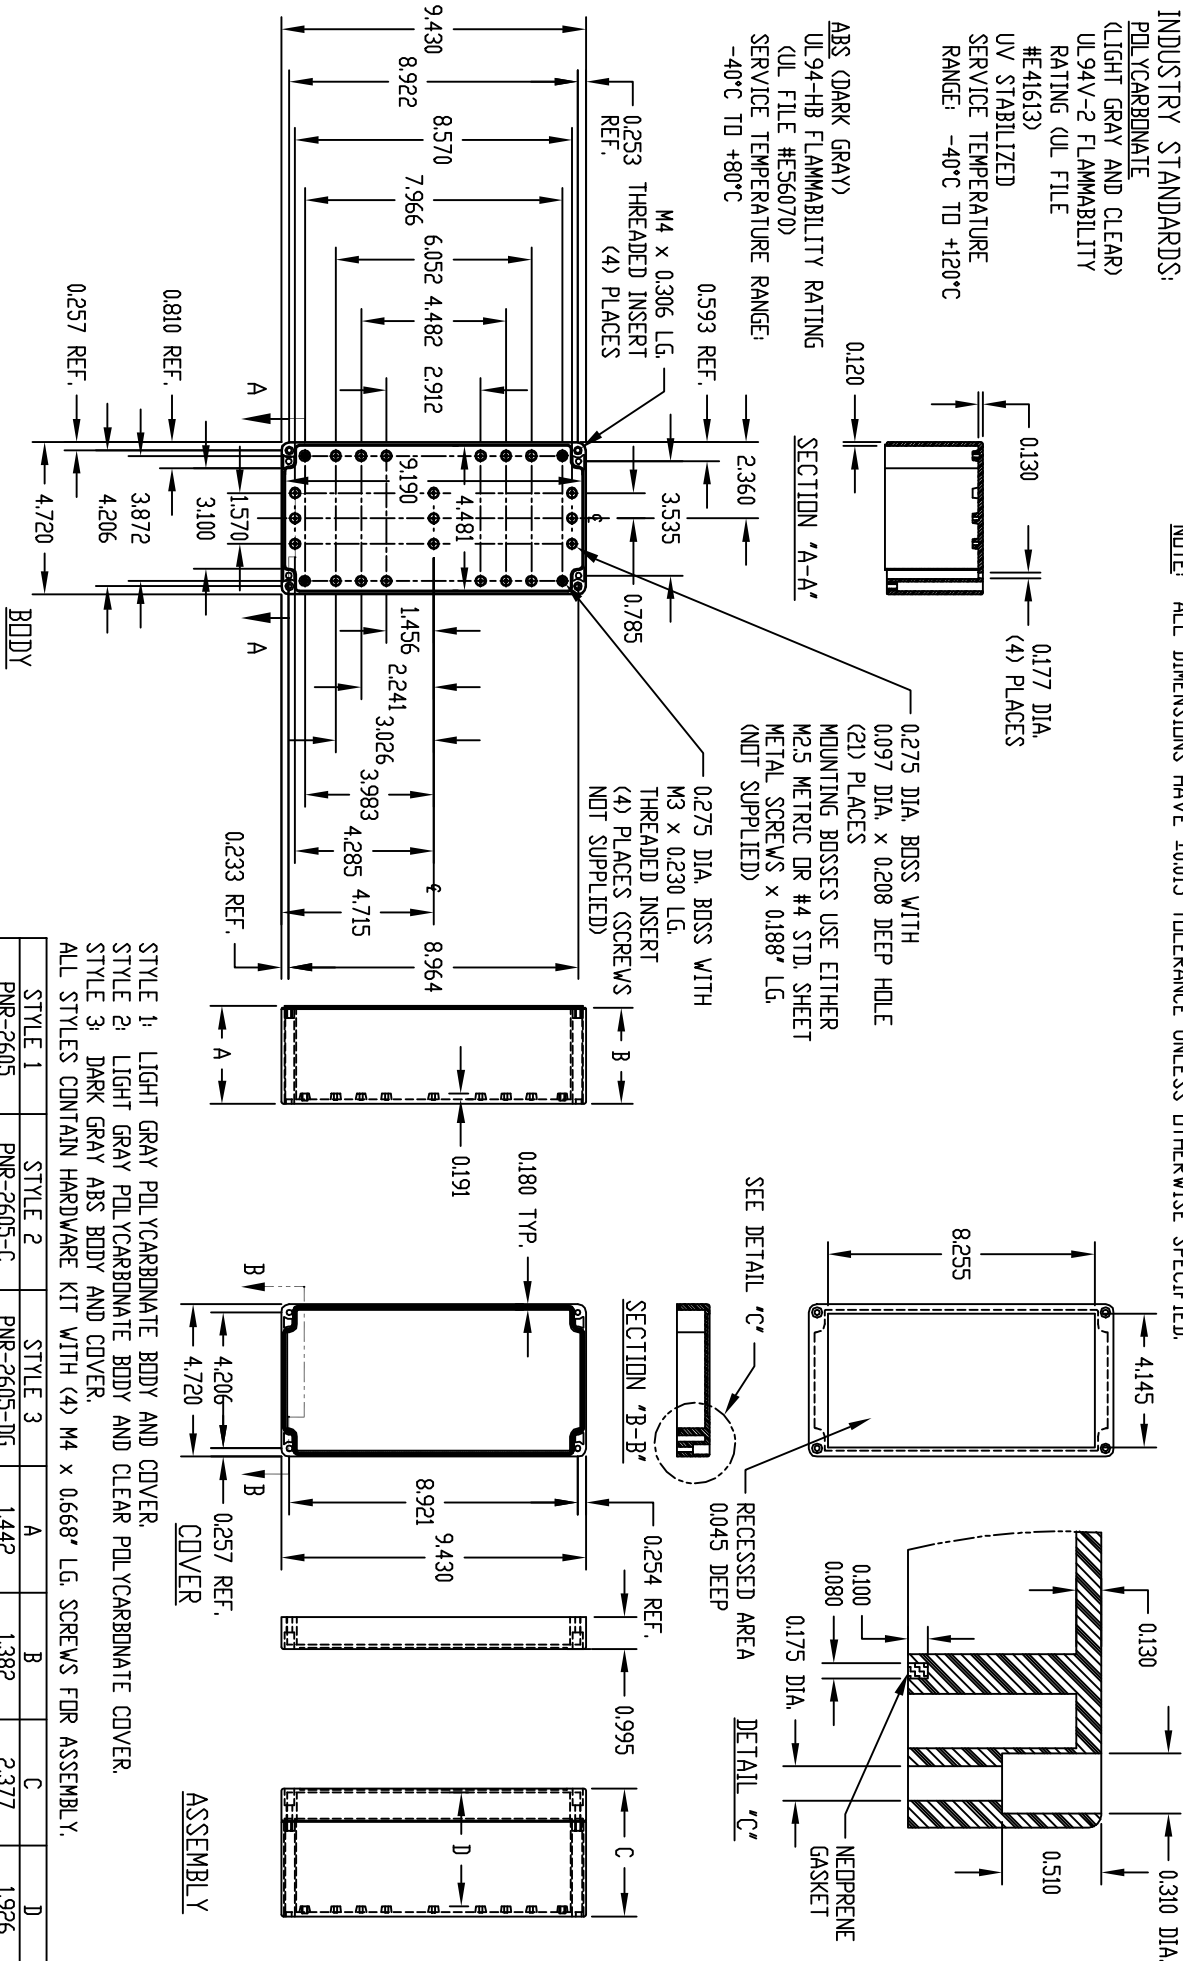

STYLE 1: LIGHT GRAY POLYCARBONATE BODY AND COVER.
STYLE 2: LIGHT GRAY POLYCARBONATE BODY AND CLEAR POLYCARBONATE COVER.
STYLE 3: DARK GRAY ABS BODY AND COVER.
ALL STYLES CONTAIN HARDWARE KIT WITH (4) M4 x 0.668" LG. SCREWS FOR ASSEMBLY.

STYLE 1	STYLE 2	STYLE 3	A	B	C	D
PNR-2605	PNR-2605-C	PNR-2605-DG	1.442	1.382	2.377	1.926
PNR-2606	PNR-2606-C	PNR-2606-DG	3.022	2.962	3.957	3.506