



WORLDWIDE

PRODUCTS



CML

INNOVATIVE TECHNOLOGIES

WHERE INNOVATION COMES TO LIGHT

[Home](#)

[About CML](#)

[Service](#)

[Media Center](#)

[Contact](#)

[Access CML](#)

Products

Based LEDs

CML IT Based LEDs are an effective alternative for based incandescent lamps. Based LEDs have a number of advantages when compared to miniature lamps. Features include a long life expectancy of up to 100,000 hours with low power consumption. Based LEDs are shock and vibration proof and come in a wide variety of colors, styles and voltages.

Part Number: 2410F73-24V

Serial Number: 2410F73

Based LED type: MegaStarLED

Size (inch): T-1

Size (mm): T10

Housing Size: 10.1x20.7mm

Base: All

Chip number: N/A

Chip color: white

Wavelength (mA):

Op. voltage (V): 24

Rectifier:

AC current:

DC current:

Type Iv DC current:

Voltage tolerance (%): 10%

Op. temperature (°C):

Storage temperature (°C):

RoHS Status: Currently under review

WORLDWIDE

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

Sixcess

a new generation of lamp



Pat. pending


Sixcess

- Long Life expectancy
- Rugged solid-state construction for shock & vibration resistance
- Reduced Running costs
- Low Power Consumption
- Reduce down time
- Looks identical to 6S6 day or night
- Indoor or outdoor, sealed sockets



Sixcess Specification	
Size & Socket:	6S6 Candelabra (E12) form factor
Color Temperature:	3100 Kelvin average
Power Consumption:	<1.0 watts
Input Voltage:	Part# 2410F73-12V 12VDC/VAC +/-10%
	Part# 2410F73-24V 24VDC/VAC +/-10%
Lumen Output Type:	8.0 Flux (1m)
Lumen Depreciation	Typ. 15k hours with 70% lumen maintenance
Minimum	15k hours with 50% Lumen maintenance. ave. amb temp of 80 deg F. over lamp life
Operational Temp Range:	110 deg F max. 15 deg min. Environmentally sealed
Lens:	Polycarbonate material with UV inhibitors

Available
in 12V &
24V

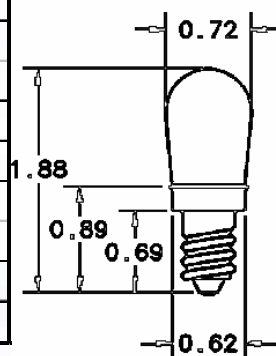

Note: Do not subject unit to transients or spikes > 50Volts peak



making LED's easy...