

Products

LEDs


CML IT is a world leader in the manufacturing of LEDs and LED assemblies. CML offers a wide variety of products utilizing LEDs as a light source. Our line of discrete LEDs consists of both through hole and SMT products in all of the standard industry sizes including 3mm, 5mm, 0603, 0805, 1206, PLCC and any others. All CML-IT LEDs are available off-the-shelf in a wide variety of colors and intensities. Binning for through LEDs is one competitive service of CML Innovative Technologies, please contact us.

	<p>Part Number: CMD28-21VGC/TR8/T1 Serial Number: CMD28-21 LED Type: SMT Industry Size: Subminiature Metric Size: 2.5 x 2.0 x 1.4 mm Output Color: GREEN Epoxy: CLEAR Peak Wave length (mA): 570 Minimum MCD: All Typical MCD: All Forward Volt (Typical): 2.1 Forward Volt (Max): 2.8 Rate Current (mA): 1 Viewing Angle (°): 150 Operating Temperature: Storage Temperature: -40 to +85 Power Dissipation: 105 Cont Forward Current Max: 25 RoHS Status: Yes</p>
--	---



CMD28-21 Series SMT LEDs

DESCRIPTION AND FEATURES

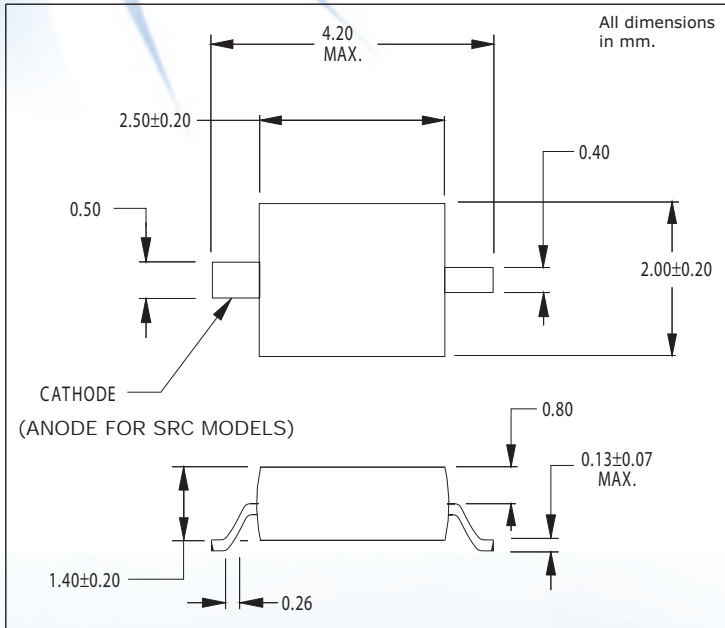

Surface Mount Technology

- Tape and reel packaged for high-speed autoinsertion.
- Convection and vapor-phase reflow compatible.
- Compactform enables high density placement.
- Gull Wing lead form
- Packaged 2000 pieces per reel.

Leading Edge LED Optoelectronic Performance

- Consistent high brightness.
- Low current types available.

Exceptional Reliability

- Stringent process controls assure quality.
- Extensive qualification testing to meet strictest requirements.
- Designed to permit easy post-reflow solder joint inspection.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

PART NUMBER	CMD28-21VGC/TR8	CMD28-21VYC/TR8	CMD28-21VRC/TR8	CMD28-21SRC/TR8	CMD28-21VRC/TR8/T1	CMD28-21VYC/TR8/T1	CMD28-21VGC/TR8/T1	CMD28-21SRC/TR8/T1
Output Color	Green	Yellow	Red	Red	H.E. Red	Yellow	Green	Red
Package Type	Single	Single	Single	Single	Single	Single	Single	Single
Package Color	Clear	Clear	Clear	Clear	Clear	Clear	Clear	Clear
Test Current (mA)	20	20	20	20	1	1	1	1
Forward Voltage Typ. (V)	2.1	2.0	2.0	1.7	2.0	2.1	2.1	1.7
Forward Voltage Max. (V)	2.8	2.8	2.8	2.4	2.8	2.8	2.8	2.4
Luminous Intensity Min. (mcd)	1.0	3.5	1.5	11.0	0.1	0.25	0.1	1.0
Luminous Intensity Typ. (mcd)	5.5	6.0	3.0	17.0	0.16	0.4	0.16	1.6
Luminous Intensity Max. (mcd)	-	-	-	-	-	-	-	-
Peak Wavelength (nm)	570	585	640	660	640	585	570	660
Viewing Angle 2θ 1/2 (degrees)	150	150	150	150	150	150	150	150
Power Dissipation (mW)	105	105	100	100	105	105	105	100
Operating Temperature (°C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Storage Temperature (°C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Peak Forward Current Max. (1 s @ 10% duty cycle) (mA)	150	150	150	150	150	150	150	150
Reverse Voltage (IR=100 A) (V)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Lead Solder Time @ 260°C	5	5	5	5	5	5	5	5