


HBL5362 -- Heavy Duty Specification Grade Duplex Receptacle

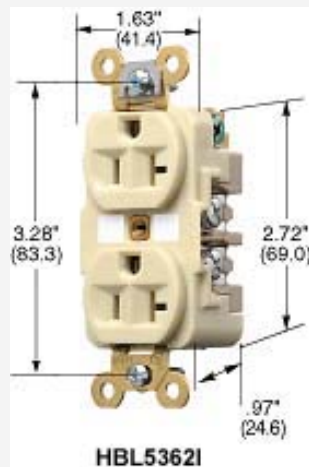


2P3W, 20A 125V, 5-20R, Flush Nylon Face, Back and Side Wired,
Brown

Product Specifications


Product Type



Receptacle Style	Duplex
Face Shape	Standard
Standard	NEMA
Amperage	20A
Voltage	125V
Poles and Wires	2 Pole, 3 Wire Grounding
Wiring Method	Back and Side
Hospital Grade ?	No
Receptacle Grade	Heavy Duty Spec Grade
Face Style	Finder Groove

Color	 Brown
Other Available Colors	Brown, Black, Gray, Ivory, Red, White
NEMA No.	5-20R
Horsepower	1
Description	Heavy Duty Straight Blade Duplex Receptacle
Type	2 Pole, 3 Wire, Grounding
Rating	20A, 125V
Certification	-UL Listed to UL498 File E2186, Guide RTRT Fed Spec WC596G, Meets WD-1 Heavy Duty and WD-6 requirements, Certified to CSA, C22.2, No. 42 file 285.
Terminal Screw Material	#10-32 Silicon Bronze (Ni plate if neutral)
Ground Screw Material	#10-32 Silicon Bronze (Green)
Wire Clamps Material	.031" (.8) Brass
Top Material	Nylon
Base Material	Reinforced PET
Power Contacts Material	.037" (.9) Brass
Mounting Strap Material	.050" (1.3) Brass
Center Assembly Rivet Material	Brass
Auto Ground Clip Material	Stainless Steel
Mounting Screw Material	Steel-Zinc Plated
Dielectric Voltage	Withstands 2,000V minimum.
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%..
Terminal Identification	Terminals identified in accordance with UL498 (Brass, White, Green).
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only.
Product Identification	Ratings are a permanent part of the device.
Flammability	UL 94 V2 or better
Operating Temperatures	Maximum continuous 75°C, minimum -40°C (w/o impact).
M Drawings	Click here for M-Drawing

Catalog Page	Click here for catalog page A5
Brochures	Click here for product brochure
Catalog Section	Click here for Section-A
UPC Number	78358543522
Weight in LBs	0.25



Straight Blade Devices 2 Pole, 3 Wire Grounding

15 and 20 Ampere, 125 Volts

Heavy Duty, Specification Grade and Hospital Grade Duplex and Single Receptacles



Heavy Duty, Specification Grade, Duplex Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws.	Brown	HBL5262	HBL5362
	Ivory	HBL5262I	HBL5362I
	Gray	HBL5262GY	HBL5362GY
	Red	HBL5262R	HBL5362R
	White	HBL5262W	HBL5362W
	Black	HBL5262BK	HBL5362BK
Corrosion resistant.	Yellow	HBL52CM62	HBL53CM62
	Ivory	HBL52CM62I	—
On 4" (101.6) round cover.	Brown	HBL5282	—
Isolated ground. ⁽¹⁾	Orange	IG5262	IG5362
	Ivory	IG5262I	IG5362I
	Gray	IG5262GY	IG5362GY
	White	—	IG5362W
	Red	IG5262R	IG5362R

Heavy Duty, Hospital Grade, Duplex Receptacles

Description	Color	Catalog Numbers	
Flush, thermoplastic polyester face, back and side wired, multiple drive screws.	Brown	HBL8200	HBL8300
	Ivory	HBL8200I	HBL8300I
	Gray	HBL8200GY	HBL8300GY
	Red	HBL8200R	HBL8300R
	White	HBL8200W	HBL8300W

Heavy Duty, Specification Grade, Single Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws.	Brown	HBL5261	HBL5361
	Ivory	HBL5261I	HBL5361I
	Gray	—	HBL5361GRY

Special Purpose Single Receptacles

Description	Color	Catalog Numbers	
Corrosion resistant.	Yellow	HBL52CM61	HBL53CM61
Isolated ground. ⁽¹⁾	Orange	IG5261	IG5361
Panel mount on 1.94" (49.3) centers.	Brown	HBL5284	HBL5357

Heavy Duty, Hospital Grade, Single Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws. ⁽²⁾	Brown	HBL8210	HBL8310
	Ivory	HBL8210I	HBL8310I
	Gray	HBL8210GY	HBL8310GY
	Red	HBL8210R	HBL8310R
	White	HBL8210W	HBL8310W
Isolated ground. ⁽¹⁾	Orange	IG8210	IG8310
Panel mount on 1.94" (49.3) centers.	Brown	HBL8284	—
	Ivory	HBL8284I	HBL8384I

Notes: ⁽¹⁾ See Section J for full line of isolated ground devices.
⁽²⁾ See Section I for full line of hospital grade devices.

