

- **120 & 240 Vac Models**
- **0-5 Vdc Phase Control**

Models CPV120 and CPV240 auxiliary function modules provide control of the phased turn-on of a solid state relay, in response to the application of a 0-5 Vdc control signal. They must be used with

Crydom Series 1 (-10) random turn-on solid state relays. Consult factory about use with 480 Vac loads. For a complete set (control module and solid state relay) order 10CPV120, 25CPV120, etc. Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	120 Vac	10CPV120	25CPV120	40CPV120		
	240 Vac	10CPV240	25CPV240	50CPV240	75CPV240	90CPV240
RELAY OUTPUT SPECIFICATIONS ①						
Operating Voltage Range (47-63 Hz) [Vrms]	90-140 (120 Vac Models) 180-280 (240 Vac Models)					
Load Current Range ③ [Arms]	.04-10	.04-25	.04-50	.04-75	.04-90	
Transient Overvoltage [Vpk]	400 (120 Vac models) 600 (240 Vac models)					
Max. Surge Current, (16.6ms) [Apk]	120	250	625	1000	1200	
Max. On-State Voltage Drop @ Rated Current [Vpk]	1.6	1.6	1.6	1.6	1.6	
Thermal Resistance Junction to Case [R _{θJC}] iC/W	1.48	1.02	0.63	0.31	0.28	
Maximum I ² t for Fusing, (8.3 msec.) [A ² sec]	60	260	1620	4150	6000	
Max. Off-State Leakage Current @ Rated Voltage [mArms]	10.0	10.0	10.0	10.0	10.0	
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec]②	500	500	500	500	500	
Max. Turn-On Time [msec]	0.02	0.02	0.02	0.02	0.02	
Max. Turn-Off Time	1/2 cycle	1/2 cycle	1/2 cycle	1/2 cycle	1/2 cycle	
Power Factor (Min.) with Max. Load	0.5	0.5	0.5	0.5	0.5	

CONTROL MODULE INPUT SPECIFICATIONS ①

	DC CONTROL
Logic Supply Range (Terminal 3A)	3.5-10Vdc
Typical Supply Current	1.6mA @ 5Vdc
Control Voltage Range (Terminal 3B)	0-5 Vdc
Nominal Control Input Impedance	1500 Ohms
Min. Turn-Off Voltage	1.0

CONTROL MODULE OUTPUT (Terminal 4B ð Input to Relay) ①

Max. Off-State Operating Voltage	36 Vdc
Max. Load Current (Sink)	3.0 mA
Max. On-State Voltage @ 3mA	0.5 Vdc
Max. Off-State Leakage @ 10Vdc	1.0 μAdc

GENERAL NOTES

- ① All parameters at 25¼C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ Heat sinking required (Relay Only), see Series 1 data sheet.

For recommended applications and more information contact:

USA: Sales Support (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540
Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154

Email: sales@crydom.com **WEB SITE:** http://www.crydom.com

UK: +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.

GERMANY: +49 (0)180 3000 506



GENERAL SPECIFICATIONS

Dielectric Strength, Signal to Load	4000 Vrms
Dielectric Strength, Signal to Base	4000 Vrms
Ambient Operating Temperature Range	-30 to 80¼C
Ambient Storage Temperature Range	-40 to 125¼C


MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (43g)
Encapsulation:	Thermally Conductive Epoxy

AVAILABLE OPTIONS


- CPV120 Control Module Only (120 Vac line)
- CPV240 Control Module Only (120 Vac line)

DERATING CURVES Ⓓ See Series 1

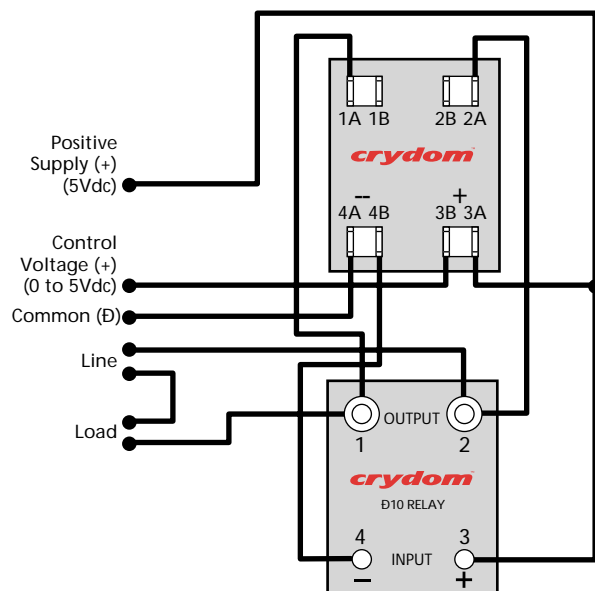

Notes

- Following pins may be interchanged: 1A & 1B, 2A & 2B.
- Pin 4A & 4B may not be interchanged, nor may pins 3A & 3B.
- The line and load may be interchanged.

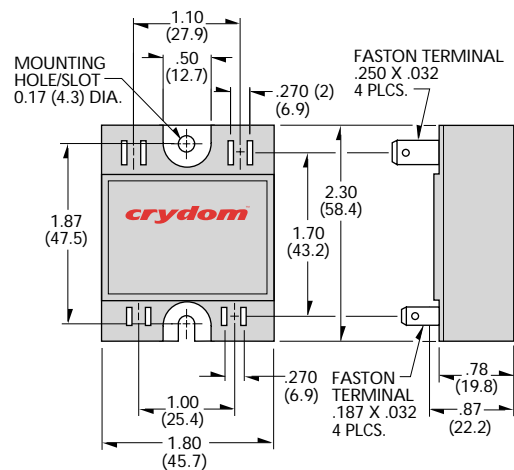

All dimensions are in inches (millimeters)

© 2003 CRYDOM CORP, Specifications subject to change without notice.