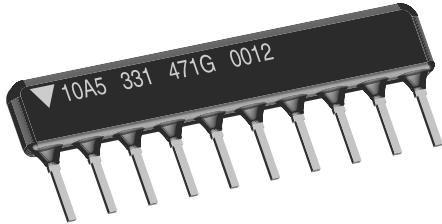


Thick Film Resistor Networks Single-In-Line, Coated SIP 01, 03, 05 Schematics



FEATURES

- Body height: “A” profile = 0.195" [4.95 mm]; “B” profile = 0.295" [7.50 mm]
- “A” profile standard in 4 thru 12 pins
- Thick film resistive elements
- Reduces total assembly costs
- Resistor elements protected by tough epoxy conformal coating
- Wide resistance range (10 Ω to 2.2 MΩ)
- Available in bulk pack (preferred) or tube pack
- Lead (Pb)-free version is RoHS Compliant (RoHS Directive 2002/95/EC)



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS							
GLOBAL MODEL/ SCHEMATIC	PACKAGE HEIGHT	RESISTOR POWER RATING max. at 70 °C ¹⁾	RESISTANCE RANGE Ω	TEMP. COEFFICIENT (- 55 °C to + 125 °C) ppm/°C	STANDARD TOLERANCE %	TCR TRACKING ¹⁾ (- 55 °C to + 125 °C) ppm/°C	OPERATING VOLTAGE V _{DC} max.
CSCxxx01	A	0.20 W	10 - 50	± 250	± 2 (1 %) ²⁾	± 50	100
	B	0.25 W	50.1 - 2.2M	± 100			
CSCxxx03	A	0.30 W	10 - 50	± 250	± 2 (1 %) ²⁾	± 50	100
	B	0.40 W	50.1 - 2.2M	± 100			
CSCxxx05	A	0.20 W	10 - 50	± 250	± 2 (1 %) ²⁾	± 150	100
	B	0.25 W	50.1 - 2.2M	± 100			

Notes

1. For resistor power ratings at + 25 °C see derating curves.
• See derating curves for Package Power Rating.
2. Contact factory for 1 %.

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CSC08A03100RGA (preferred part number format)

C	S	C	0	8	A	0	3	1	0	0	R	G	D	A			
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--

GLOBAL MODEL	PIN COUNT	PACKAGE HEIGHT	SCHEMATIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING	SPECIAL
CSC	04 = 4 Pin 08 = 8 Pin 12 = 12 Pin	A = “A” Profile B = “B” Profile	01 = Bussed 03 = Isolated 00 = Special	R = Decimal K = Thousand M = Million 10R0 = 10 Ω 680K = 680 kΩ 1M00 = 1.0 MΩ	F = ± 1 % G = ± 2 % J = ± 5 % S = Special	EK = Lead (Pb)-free, Bulk EJ = Lead (Pb)-free, Tube PA = Tin/Lead, Bulk DA = Tin/Lead, Tube	Blank = Standard (Dash Number) (up to 3 digits) From 1 - 999 as applicable

Historical Part Number example: CSC08A03101G (will continue to be accepted)

CSC	08	A	03	101	G	D03
HISTORICAL MODEL	PIN COUNT	PACKAGE HEIGHT	SCHEMATIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

New Global Part Numbering: CSC08A05131AGPA (preferred part number format)

C	S	C	0	8	A	0	5	1	3	1	A	G	P	A			
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--

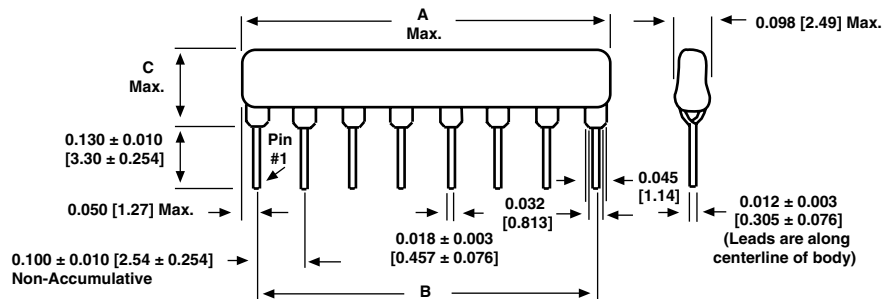
GLOBAL MODEL	PIN COUNT	PACKAGE HEIGHT	SCHEMATIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING	SPECIAL
CSC	04 = 4 Pin 08 = 8 Pin 12 = 12 Pin	A = “A” Profile B = “B” Profile	05 = Dual Terminator	3 digit impedance code, followed by alpha modifier (see impedance codes table)	F = ± 1 % G = ± 2 % J = ± 5 %	EK = Lead (Pb)-free, Bulk EJ = Lead (Pb)-free, Tube PA = Tin/Lead, Bulk DA = Tin/Lead, Tube	Blank = Standard (Dash Number) (up to 3 digits) From 1 - 999 as applicable

Historical Part Number example: CSC08A05221331G (will continue to be accepted)

CSC	08	A	05	221	331	G	P03
HISTORICAL MODEL	PIN COUNT	PACKAGE HEIGHT	SCHEMATIC	RESISTANCE VALUE 1	RESISTANCE VALUE 2	TOLERANCE CODE	PACKAGING

* Pb containing terminations are not RoHS compliant, exemptions may apply. Lead (Pb)-free version meets EIA/ECA-CB23 Rev. G whisker test requirements for Class 1A products.

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	CSC SERIES
Voltage Coefficient of Resistance	V_{eff}	< 50 ppm typical
Dielectric Strength	V_{AC}	200
Isolation Resistance (03 Schematic)	Ω	> 100M
Operating Temperature Range	$^{\circ}C$	- 55 to + 125

DIMENSIONS in inches [millimeters]


01 SCHEMATIC	GLOBAL MODEL	NUMBER OF RESISTORS	A (Maximum)	B	C (Maximum)	
		CSC04	3	0.390 [9.90]	0.300 [7.62]	"A" Profile = 0.195 [4.95] "B" Profile = 0.295 [7.50]
CSC05		4	0.490 [12.45]	0.400 [10.16]		
CSC06		5	0.590 [14.99]	0.500 [12.70]		
CSC07		6	0.690 [17.53]	0.600 [15.24]		
CSC08		7	0.790 [20.07]	0.700 [17.78]		
CSC09		8	0.890 [22.61]	0.800 [20.32]		
CSC10		9	0.990 [25.15]	0.900 [22.86]		
CSC11		10	1.09 [27.69]	1.00 [25.40]		
CSC12		11	1.19 [30.23]	1.100 [27.94]		
03 SCHEMATIC		GLOBAL MODEL	NUMBER OF RESISTORS	A (Maximum)	B	
		CSC04	2	0.390 [9.90]	0.300 [7.62]	"A" Profile = 0.195 [4.95] "B" Profile = 0.295 [7.50]
		CSC06	3	0.590 [14.99]	0.500 [12.70]	
		CSC08	4	0.790 [20.07]	0.700 [17.78]	
		CSC10	5	0.990 [25.15]	0.900 [22.86]	
		CSC12	6	1.19 [30.23]	1.100 [27.94]	
05 SCHEMATIC		GLOBAL MODEL	NUMBER OF RESISTORS	A (Maximum)	B	
		CSC04	4	0.390 [9.90]	0.300 [7.62]	"A" Profile = 0.195 [4.95] "B" Profile = 0.295 [7.50]
		CSC05	6	0.490 [12.45]	0.400 [10.16]	
		CSC06	8	0.590 [14.99]	0.500 [12.70]	
		CSC07	10	0.690 [17.53]	0.600 [15.24]	
		CSC08	12	0.790 [20.07]	0.700 [17.78]	
		CSC09	14	0.890 [22.61]	0.800 [20.32]	
		CSC10	16	0.990 [25.15]	0.900 [22.86]	
		CSC11	18	1.09 [27.69]	1.00 [25.40]	
		CSC12	20	1.19 [30.23]	1.100 [27.94]	



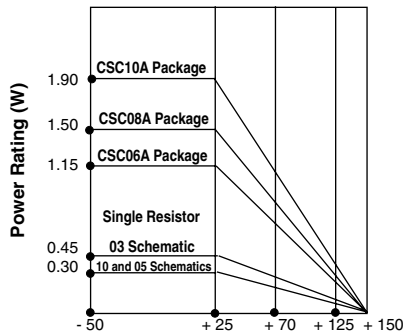
MECHANICAL SPECIFICATIONS	
Marking Resistance to Solvents:	Permanency testing per MIL-STD-202, Method 215
Solderability:	Per MIL-STD-202, Method 208E, RMA flux
Body:	High alumina, epoxy coated
Terminals:	Solder plated leads

STOCKED RESISTANCE VALUES IN OHMS (“G” TOLERANCE)

Standard E-24 resistance values stocked. Consult factory.
Many dual terminator resistance values stocked. Consult factory.

IMPEDANCE CODES					
CODE	R ₁ (Ω)	R ₂ (Ω)	CODE	R ₁ (Ω)	R ₂ (Ω)
500B	82	130	141A	270	270
750B	120	200	181A	330	390
800C	130	210	191A	330	470
990A	160	260	221B	330	680
101C	180	240	281B	560	560
111C	180	270	381B	560	1.2K
121B	180	390	501C	620	2.7K
121C	220	270	102A	1.5K	3.3K
131A	220	330	202B	3K	6.2K

”A” Profile

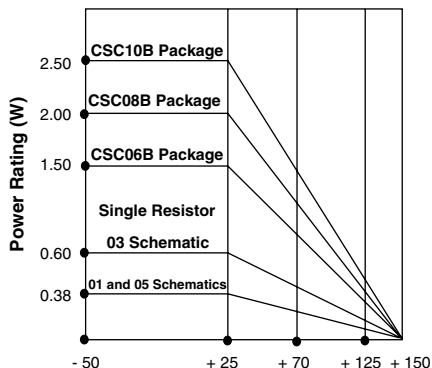


Derating Ambient Temperature °C

”A” PROFILE + 70 °C PACKAGE RATINGS

CSC12A	1.5 W
CSC11A	1.37 W
CSC10A	1.25 W
CSC09A	1.12 W
CSC08A	1.00 W
CSC07A	0.87 W
CSC06A	0.75 W
CSC05A	0.62 W
CSC04A	0.40 W


”B” Profile



Derating Ambient Temperature °C

”B” PROFILE + 70 °C PACKAGE RATINGS


CSC12B	1.90 W
CSC11B	1.75 W
CSC10B	1.60 W
CSC09B	1.45 W
CSC08B	1.30 W
CSC07B	1.15 W
CSC06B	1.00 W
CSC05B	0.80 W
CSC04B	0.60 W

CIRCUIT APPLICATIONS
01 Schematic

Bussed

The CSCxxx01 single-in-line resistor networks provide the user with nominally equal resistors, each connected to a common pin (Pin No. 1). Commonly used in the following applications:

- "Wired OR" Pull-up
- Power Gate Pull-up
- MOS/ROM Pull-up/Pull-down
- Open Collector Pull-up
- TTL Input Pull-down
- TTL Unused Gate Pull-up

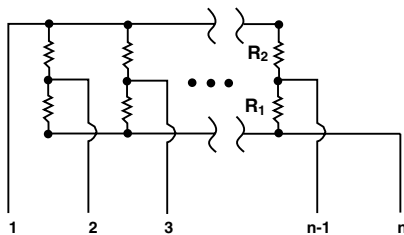
* "A" profile standard, "B" Profile available.

03 Schematic

Isolated

The CSCxxx03 single-in-line resistor networks provide the user with nominally equal resistors. Each resistor is isolated from all others. Commonly used in the following applications:

- "Wired OR" Pull-up
- Power Driven Pull-up
- Power Gate Pull-up
- Line Termination
- Long-Line Impedance Balancing
- LED Current Limiting
- ECL Output Pull-down
- TTL Input Pull-down

* "A" Profile standard, "B" Profile available.

05 Schematic

Dual Terminator

The CSCxxx05 circuits contain series pairs of resistors. Each series pair is connected between two common lines. The junction of these resistor pairs is connected to the input terminals. The 05 circuits are designed for TTL dual-line termination and pulse squaring.

* "A" profile standard, "B" Profile available.

PERFORMANCE

TEST	CONDITIONS	MAX. ΔR (Typical Test Lots)
Thermal Shock	5 cycles between - 65 °C and + 125 °C	$\pm 0.50 \% \Delta R$
Short Time Overload	2.5 x rated working voltage, 5 seconds	$\pm 0.25 \% \Delta R$
Low Temperature Operation	45 minutes at full rated working voltage at - 65 °C	$\pm 0.25 \% \Delta R$
Moisture Resistance	240 hours with humidity ranging from 80 % RH to 98 % RH	$\pm 1.00 \% \Delta R$
Resistance to Soldering Heat	Leads immersed in + 350 °C solder to within 1/16" of body for 3 seconds	$\pm 0.25 \% \Delta R$
Shock	Total of 18 shocks at 100 g's	$\pm 0.25 \% \Delta R$
Vibration	12 hours at maximum of 20 g's between 10 and 2000 Hz	$\pm 0.25 \% \Delta R$
Load Life	1000 hours at + 70 °C, rated power applied 1.5 hours "ON", 0.5 hours "OFF" for full 1000 hours period. Derated according to the curve.	$\pm 1.00 \% \Delta R$
Terminal Strength	4.5 pound pull for 30 seconds	$\pm 0.25 \% \Delta R$
Insulation Resistance	10 000 M Ω (minimum)	-
Dielectric Withstanding Voltage	No evidence of arcing or damage (200 V _{rms} for 1 minute)	-



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.