


# Metal Film Resistors, Precision, Ultra-High Stability



### FEATURES

- Extremely low temperature coefficient of resistance
- Very low noise and voltage coefficient
- Very good high frequency characteristics
- Can replace wirewound bobbins
- Proprietary epoxy coating provides superior moisture protection
- Lead (Pb)-free version is RoHS compliant

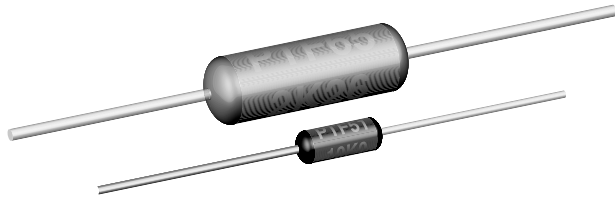

RoHS\* COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS						
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{85\text{ }^\circ\text{C}}$ W	LIMITING ELEMENT VOLTAGE MAX. $V_{\equiv}$	TEMPERATURE COEFFICIENT ppm/°C	TOLERANCE %	RESISTANCE RANGE $\Omega$
PTF51	PTF-51	0.05	200	5, 10, 15	0.02, 0.05, 0.1, 0.25, 0.5, 1	15R to 100K
PTF56	PTF-56	0.125	300	5, 10, 15	0.01, 0.02, 0.05, 0.1, 0.25, 0.5, 1	15R to 500K
PTF65	PTF-65	0.25	500	5, 10, 15	0.05, 0.1, 0.25, 0.5, 1	15R to 1M0

**Note:**

- Marking: Print-marked-model, Value, Tolerance, TC, Date code

TEMPERATURE COEFFICIENT CODES		
GLOBAL TC CODE	HISTORICAL TC CODE	TEMPERATURE COEFFICIENT
Z	T-16	5 ppm/°C
Y	T-13	10 ppm/°C
X	T-10	15 ppm/°C

TECHNICAL SPECIFICATIONS				
PARAMETER	UNIT	PTF51	PTF56	PTF65
Rated Dissipation at 85 °C	W	0.05	0.125	0.25
Limiting Element Voltage	$V_{\equiv}$	200	300	500
Insulation Voltage (1 Min)	$V_{\text{eff}}$	> 500	> 500	> 500
Thermal Resistance	K/W	< 1300	< 520	260
Terminal Strength, Axial	N	> 150	> 50	> 50
Insulation Resistance	$\Omega$	$\geq 10^{11}$	$\geq 10^{11}$	$\geq 10^{11}$
Category Temperature Range	°C	- 55 to + 150	- 55 to + 150	- 55 to + 150
Failure Rate	$10^{-9}/\text{h}$	< 1	< 1	< 1
Weight (Max.)	g	0.11	0.35	0.75

### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: PTF5620K500BYRE (preferred part numbering format)

P	T	F	5	6	2	0	K	5	0	0	B	Y	R	E			
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--


GLOBAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	TEMP. COEFFICIENT	PACKAGING	SPECIAL
PTF51 PTF56 PTF65	R = Decimal K = Thousand M = Million 15R000 = 15 $\Omega$ 500K00 = 500 k $\Omega$ 1M0000 = 1.0 M $\Omega$	T = $\pm 0.01\%$ (1) Q = $\pm 0.02\%$ (1) A = $\pm 0.05\%$ B = $\pm 0.1\%$ C = $\pm 0.25\%$ D = $\pm 0.5\%$ F = $\pm 1\%$	Z = 5 ppm Y = 10 ppm X = 15 ppm 0 = Special	EK = Lead (Pb)-free, Bulk EA = Lead (Pb)-free, T/R (Full) EB = Lead (Pb)-free, T/R (1000 pieces) BF = Tin/Lead, Bulk RE = Tin/Lead, T/R (Full) R6 = Tin/Lead, T/R (1000 pieces)	Blank = Standard (Dash Number) (up to 3 digits) From 1 - 999 as applicable

Historical Part Number example: PTF-5620K5BT-13R36 (will continue to be accepted)

PTF-56	20K5	B	T-13	R36
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	TEMP. COEFFICIENT	PACKAGING

**Note:**

- (1) Historical tolerance codes were BB for 0.01 % and BC for 0.02 %
- \* Pb containing terminations are not RoHS compliant, exemptions may apply

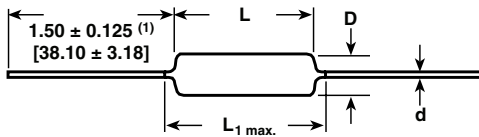
**DIMENSIONS**

**Note:**

 (1)  $1.08 \pm 0.125$  [27.43 ± 3.18] if tape and reel

GLOBAL MODEL	DIMENSIONS in inches [millimeters]			
	L	D	L <sub>1</sub> max.	d
PTF51	$0.150 \pm 0.020$ [3.81 ± 0.51]	$0.070 \pm 0.010$ [1.78 ± 0.25]	0.200 [5.08]	0.016 [0.41]
PTF56	$0.250 \pm 0.031$ [6.35 ± 0.79]	$0.091 \pm 0.009$ [2.31 ± 0.23]	0.300 [7.62]	0.025 [0.64]
PTF65	$0.375 \pm 0.062$ [9.53 ± 1.57]	$0.145 \pm 0.016$ [3.68 ± 0.41]	0.475 [12.07]	0.025 [0.64]

**PERFORMANCE**

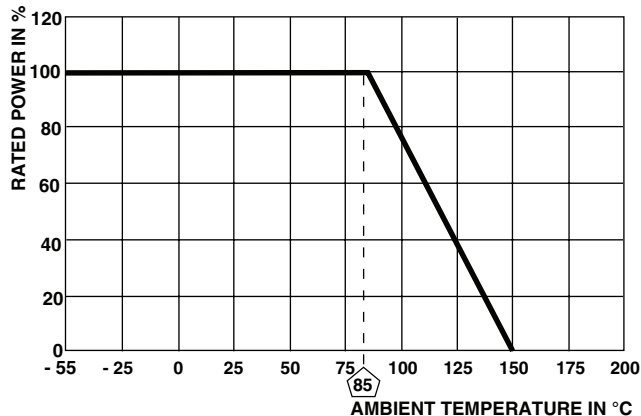TEST	CONDITIONS OF TEST	TEST RESULTS
Life	MIL-PRF-55182 Paragraph 4.8.18 1000 h rated power at + 85 °C	≤ ± 0.04 %
Thermal Shock	MIL-STD-202, Method 107 - 55 °C to + 85 °C	≤ ± 0.02 %
Short Time Overload	MIL-R-10509, Paragraph 4.7.6	≤ ± 0.01 %
Low Temperature Operation	MIL-PRF-55182, Methods 4.8.10	≤ ± 0.02 %
Moisture	MIL-PRF-55182, Paragraph 4.8.15	≤ ± 0.08 %
Resistance to Soldering Heat	MIL-STD-202, Methods 210	≤ ± 0.02 %
Damp Heat IEC 60068-2-3	56 days at 40 °C and 92 % RH	≤ ± 0.08 %
Dielectric Withstanding Voltage	MIL-STD-202, Methods 301 and 105	≤ ± 0.01 %


**DERATING**
**MATERIAL SPECIFICATIONS**

<b>Element:</b>	Precision deposited nickel chrome alloy with controlled annealing
<b>Encapsulation:</b>	Specially formulated epoxy compounds. Coated construction
<b>Core:</b>	Fire-cleanded high purity ceramic
<b>Termination:</b>	Standard lead material is solder-coated copper. Solderable and weldable per MIL-STD-1276, Type C.


**TEMPERATURE COEFFICIENT OF RESISTANCE**

Temperature coefficient (TC) of resistance is normally stated as the maximum amount of resistance change from the original + 25 °C value as the ambient temperature increases or decreases. This is most commonly expressed in parts per million per degree centigrade (ppm/°C).

The resistance curve over the operating temperature range is usually a non-linear curve within predictable maximum limits. PTF resistors have a very uniform resistance temp. characteristic when measured over the operating range of - 20 °C to + 85 °C. The standard temperature coefficients available are

X = ± 15 ppm/°C, Y = ± 10 ppm/°C and Z = ± 5 ppm/°C.

Some applications of the PTF require operation beyond the specifications of - 20 °C to + 85 °C. The change in temperature coefficient of resistance is very small (less than ± 0.05 ppm/°C) over the expanded temperature range of - 55 °C to ± 150 °C. Therefore, when operating outside the range - 20 °C to + 85 °C, the designer can plan for a worst case addition of ± 0.05 ppm/°C for each degree centigrade beyond either - 20 °C or + 85 °C as indicated in the graph. This applies to all three temperature coefficient codes.

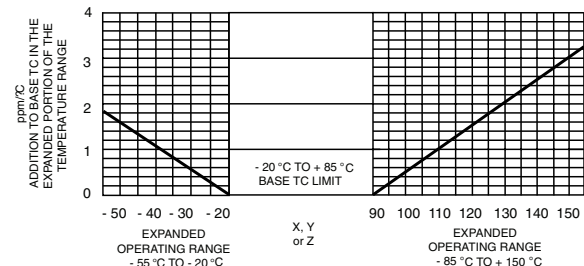

**Example:** Assume the operating characteristics demand a temperature range from - 55 °C to + 125 °C. This requires a ± 35 °C Δ below - 20 °C and a ± 40 °C Δ above + 85 °C. The extreme Δ being ± 40 °C means that the worst case addition to the specified TC limit of ± 0.05 ppm/°C times ± 40 °C or ± 2 ppm/°C. Therefore, a Z which is characterized by a base TC limit of ± 5 ppm/°C over the temperature range of - 20 °C to ± 85 °C will exhibit a maximum temperature coefficient of ± 7 ppm/°C over the expanded portion of the temperature range of - 55 °C to + 125 °C.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.