


### BRAID SHIELDED RUBBER JACKETED CABLE

**DESCRIPTION:**

Each conductor, stranded tinned copper, color coded rubber insulation, cabled with fillers where necessary, mylar wrap, braided tinned copper shield, wrap, black rubber jacket overall.

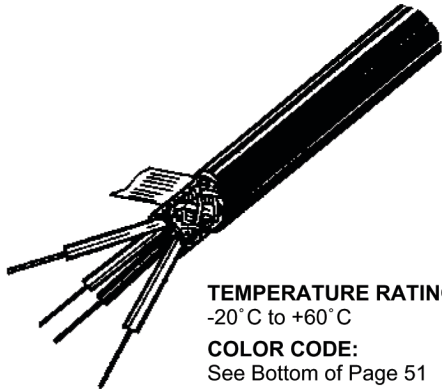

**TEMPERATURE RATING:**  
-20° C to +60° C  
**COLOR CODE:**  
See Bottom of Page 51

OLYMPIC NO.	NO. OF COND.	CONDUCTOR SIZE	CONDUCTOR STRAND	NOM. WALL THICK.	NOM. JKT. THICK.	NOM. O.D.	SUG. WORK VOLT
3500	2	20	26x34	.020"	.035"	.260"	600
3501	3	20	26x34	.020"	.035"	.275"	600
3502	4	20	26x34	.020"	.035"	.295"	600
3503	5	20	26x34	.020"	.035"	.320"	600
3504	6	20	26x34	.020"	.035"	.340"	600
3505	7	20	26x34	.020"	.035"	.340"	600
3506	8	20	26x34	.020"	.035"	.365"	600
3507	10	20	26x34	.020"	.035"	.405"	600
3508	12	20	26x34	.020"	.065"	.485"	600
3509	15	20	26x34	.020"	.065"	.525"	600
3510	20	20	26x34	.020"	.065"	.570"	600


### MIL-W-16878 TYPE B/NYLON SHIELDED CABLES

**DESCRIPTION:**

Stranded tinned copper, vinyl insulated, clear nylon jacket, conductors cabled, 90% tinned copper braid shield, white vinyl jacket overall.  
Nominal nylon thickness: .003"

**TEMPERATURE RATING:**  
-55° C to +105° C

Suggested Operating Voltage - 600V

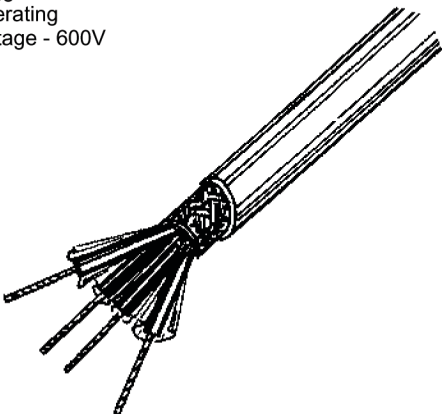

**COLOR CODE:**

- 1 - White
- 2 - White, Black
- 3 - White, Black, Red
- 4 - White, Black, Red, Green

OLYMPIC NO.	NO. OF COND.	CONDUCTOR SIZE	CONDUCTOR STRAND	NOM. WALL THICK.	NOM. OVERALL JACKET	NOM. O.D.
2920	1	26	7/34	.010"	.010"	.087"
2921	2	26	7/34	.010"	.014"	.138"
2922	3	26	7/34	.010"	.014"	.142"
2923	4	26	7/34	.010"	.016"	.162"
2924	1	24	19/36	.010"	.010"	.092"
2925	2	24	19/36	.010"	.016"	.152"
2926	3	24	19/36	.010"	.016"	.161"
2927	4	24	19/36	.010"	.017"	.171"
2928	1	22	19/34	.010"	.010"	.100"
2929	2	22	19/34	.010"	.016"	.168"
2930	3	22	19/34	.010"	.017"	.178"
2931	4	22	19/34	.010"	.019"	.194"
2932	1	20	19/32	.010"	.010"	.106"
2933	2	20	19/32	.010"	.019"	.186"
2934	3	20	19/32	.010"	.019"	.196"
2935	4	20	19/32	.010"	.021"	.218"
2936	1	18	19/30	.010"	.012"	.120"
2937	2	18	19/30	.010"	.021"	.210"
2938	3	18	19/30	.010"	.022"	.227"
2939	4	18	19/30	.010"	.023"	.250"
2940	1	16	19/29	.010"	.016"	.137"
2941	2	16	19/29	.010"	.023"	.218"
2942	3	16	19/29	.010"	.023"	.240"
2943	4	16	19/29	.010"	.025"	.274"