




## Products

### Lamps

CML range of incandescent lamps is one of the largest available on the market. Different lamp bases are available: bayonet, screw, wedge base, flange, bi-pin, wire terminal, groove, BA7s.

<p>       L.C.L. 12 Pn 1.5        EXPANDED TIP TO CLEAR IN 3.00 DIA HOLE        (1.5)        20.7 MAX        1.65 MIN        4.50 MAX        1.15        0.54        4.00 MAX        1.30-2.4        0.8 x 1.5        CLEAR GLASS PROPERLY APPLIED MUST BE UNIFORM IN SHAPE AND SUBSTANTIALLY FREE FROM PRELIMINARY ACTION     </p>	<p> <b>Part Number:</b> 656  <b>Serial Number:</b> WB T10  <b>Base:</b> Wedge Base  <b>Base type:</b> W2.1x9.5d  <b>Lamp size (inch):</b> T- 3 1/4  <b>Lamp size:</b> T10  <b>Rating:</b> 28V 60mA  <b>Test volts (V):</b> 28  <b>Current mA:</b> 60  <b>Wattage (W):</b> 1.7  <b>Light output (Lm):</b> 7.8  <b>Light output (mscp):</b> 0.62  <b>AC Life:</b> 5000  <b>DC Life:</b> 2500  <b>Filling:</b> Vacuum  <b>Filament type:</b> C-2F  <b>Comments:</b>  <b>RoHS Status:</b> Yes     </p>
---	--

**T-3 1/4 Wedge Base**

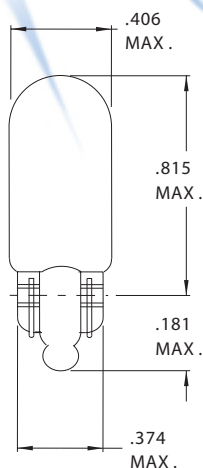

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM559	1.38	.56	.33	50	S-2
CM127	2.47	.25	.45	30	C-2R
CM285	5.00	.09	.25	1,500	C-2R
CM740	5.00	.07	.19	1,500	C-6
CM820	6.00	.14	.35	1,200	C-2V
CM159	6.30	.15	.34	5,000	C-2R
CM259	6.30	.25	.65	5,000	C-2R
CM444	6.30	.25	.90	3,000	C-2V
CM447	6.30	.15	.52	1,500	C-2V
CM555	6.30	.25	.90	3,000	C-2R
CM147	7.00	.43	2.0	1,500	C-2R
CM190	7.00	.34	.30	25,000	C-2F
CM947	9.84	.50	4.0	200	C-2R
CM280	10.0	.13	.85	250	C-2V
CM3-501	12.0	.42	2.6	1,000	C-2R
CM3-504	12.0	.25	1.11	4,000	C-2V
CM3-509	12.0	.17	.80	4,000	C-2V
CM192	13.0	.33	3.0	1,000	C-2V
CM124	14.0	.27	1.5	5,000	C-2F
CM158	14.0	.24	2.0	500	C-2V
CM161	14.0	.19	1.0	1,500	C-2F
CM168	14.0	.35	3.0	1,500	C-2F
CM193	14.0	.33	2.0	5,000	C-2F
CM194	14.0	.27	2.0	1,500	C-2F
CM658	14.0	.08	.31	15,000	C-2F
CM184	14.4	.24	1.0	5,000	C-2F
CM3-505	24.0	.13	1.0	5,000	C-2F
CM3-507	24.0	.21	2.4	5,000	C-2F
CM152	28.0	.07	.85	10,000	C-2F
CM400	28.0	.10	1.6	1,000	C-2V
CM464	28.0	.17	3.0	1,500	C-2F
CM585	28.0	.04	.30	7,000	C-2F
CM655	28.0	.20	3.0	7,000	C-2F
CM656	28.0	.06	.62	2,500	C-2F
CM657	28.0	.08	.62	7,500	C-2F