

Home > 5219461F

Part Number: **5219461F**


General Description

Series	521
Configuration	5 mm Lens
Description	Discrete LED Lamp
Package Options	Bulk Packaging
Sizes	5mm
Lamp Type	Bi-Color
Lens Color	Non-Tinted, Diffused

Absolute Maximum Ratings (Ta = 25°)

Solder Temperature	260° for 5 sec
Operating Temperature	-20~ +85
Storage Temperature	-55~ +100

Operating Characteristics

		
Color	Yellow	Green
LED Type	GaAsP/GaP	GaP
Luminous Intensity Min	2.1	4.2
Test Current mA	10mA	10mA
Dominant Wavelength Typical	585nm	569nm



This is a
RoHS Compliant Product
To learn more click here






521 SERIES
5mm Discrete LED
3 Leded, Non-Tinted, Diffused
BI-COLOR


PART NUMBER	LED COLOR
521-9450	RED/GREEN
521-9461	YELLOW/GREEN

SPECIFICATIONS

521-9450

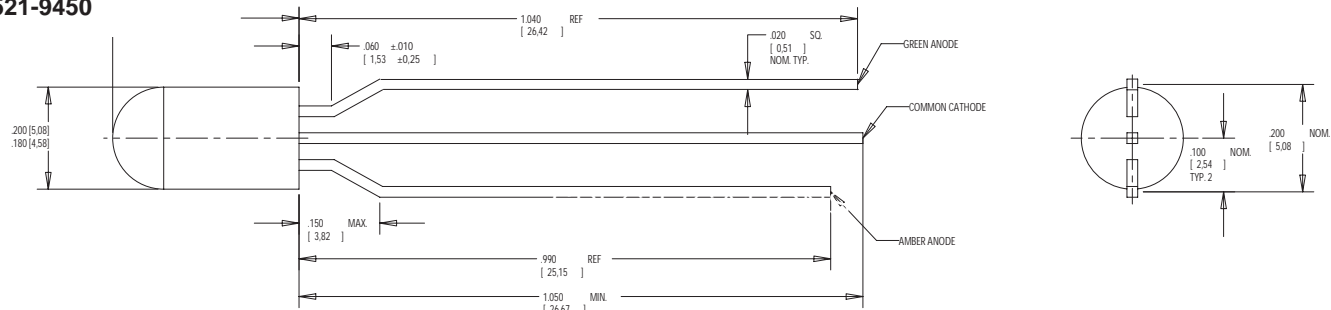

521-9461

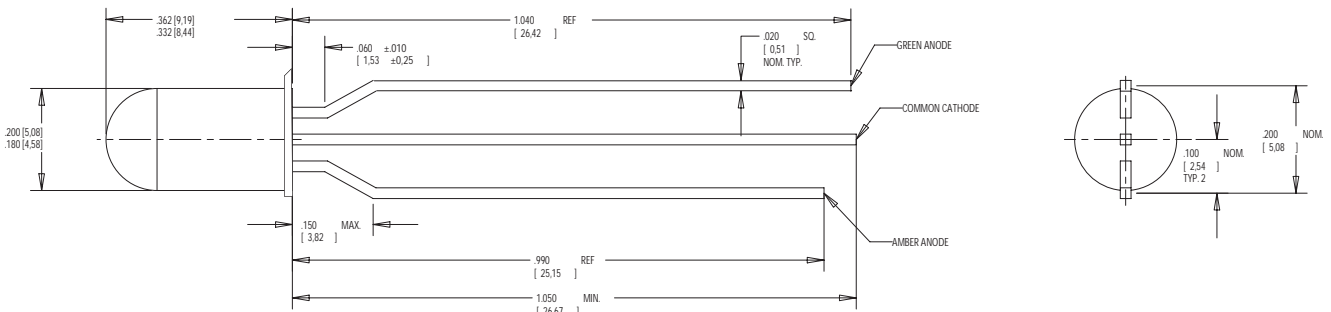

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)

Power Dissipation (mW):	135/135	Operating Temperature (°C):	-20/+85
Average Forward Current (mA):	25/25	Storage Temperature (°C):	-55/+85
Derating (mA/°C) From 50°C	.5/.5	Soldering Temperature:	260°C, 5 seconds, 1.6 mm from case
Peak Current (mA):	90/90		

OPERATING CHARACTERISTICS (T_A = 25°C)

Part Number	Color	Peak Wavelength (nm)	Luminous Intensity (mcd)	Forward Voltage (V)*	Viewing Angle 2θ 1/2
521-9450	Red/Green	635/565	Min. 2.1/4.2 Typ. 5/8	Typ. 2.1/2.3 Max. 2.5/2.7	65°
521-9461	Yellow/Green	583/565	Min. 2.1/4.2 Typ. 5/8	Typ. 2.1/2.1 Max. 2.5/2.5	65°

*I_F = 10mA



Dialight Corporation