

OPTEK

© 2009 OPTEK - a TT electronics Company.

OPA741 Series 12 Watt Light Ring on OptoTherm Linear Heat S

PT electronics OPTEK Technology

OptoTherm Linear Heat Spreader with Lens

OPA741 Series

- 12, 1 watt LEDs per cylindrical substrate
- Mono-color per strip (Blue, Green, Red, Yellow, White)
- Component beam angle 23°
- Universal connector (Tyco 2-292173-2 mates with 173977-2)
- RoHS Compliant




The **OPA741** Series are designed for areas where lighting intensity and reliability are essential. The light beam angle of 23° is ideal for illuminating areas close or a long distances from the device while requiring minimal space. A High Performance Heat Spreader (HPHS) is used to ensure the best heat dissipation of any light assembly in the industry.

For custom colors and design contact your OPTEK representative.

Electrical / Optical Characteristics: T_A=25°C, I_F=700mA

Part Number	Typical Forward Voltage (V)	Luminous Flux (lm)	Beam Angle	Color	Dominant Wavelength
OPA741Y23	15.0	357		Yellow	587 nm
OPA741B23	21.6	92		Blue	470 nm
OPA741G23	21.6	490	23°	Green	530 nm
OPA741R23	15.0	265		Red	625 nm
OPA741W23	21.6	490		White	6,500°K

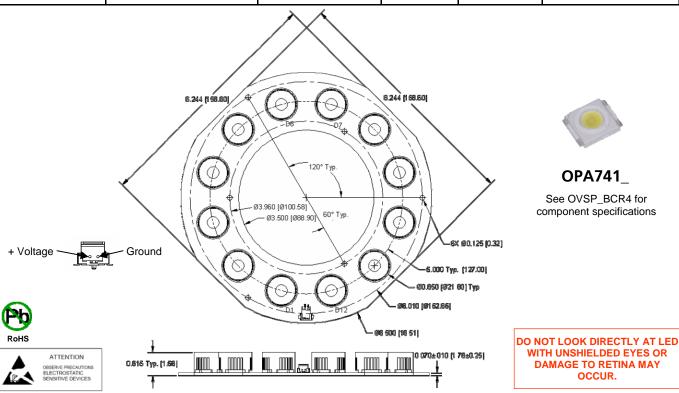

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.