



Type: 1410-F1



Dimensions

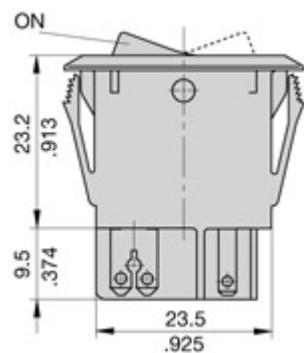

Internal connection diagrams



Miniaturised single pole rocker switch/thermal circuit breaker combining ON/OFF switching and extremely fast overload performance in a single component (S-type TO CBE to EN 60934/IEC 934). Under overload conditions an internal neon (filament bulb for low voltages) illuminates to give a clear signal of the tripped status of the mechanism and thereby the cause of power interruption, suffix -B. Alternatively the illumination can be conventionally wired to indicate the ON status of the device, suffix -E. Returning the rocker switch through the OFF position and back ON will reset the mechanism and restore the supply. Largely temperature-insensitive.

Complies with CBE standard EN 60934 (IEC 60934).

Voltage rating:

- AC 240 V
- DC 28 V (DC 50 V upon request)
- UL/CSA: AC 250 V
- UL/CSA: DC 48 V

Current ratings:

from 0.63 A to 10 A

Number of poles:

single pole

Mounting method:

flange

Terminal design:

blade terminals

Actuation:

rocker

Auxiliary contacts:

without auxiliary contacts

Water splash protection:

without water splash protection

Illumination:

with illumination
without illumination

Typical life:

- 30,000 operations for $I_N \leq 6.3$ A AC/DC
- 10,000 operations for $I_N > 6.3$ A AC
- 3,000 operations for $I_N > 6.3$ A DC
- 30 break operations at $2 \times I_N$

Interrupting capacity I_{cn} :

- 0.63...2 A: $12 \times I_N$
- 2.5...8 A: $8 \times I_N$ AC, max 50 A
- 10 A: $6 \times I_N$ AC
- 3.15...10 A: $10 \times I_N$ DC

Approvals:

CSA, UL

Description

Miniaturised single pole rocker switch/thermal circuit breaker combining ON/OFF switching and extremely fast overload performance in a single component (S-type TO CBE to EN 60934/IEC 934). Under overload conditions an internal neon (filament bulb for low voltages) illuminates to give a clear signal of the tripped status of the mechanism and thereby the cause of power interruption, suffix -B. Alternatively the illumination can be conventionally wired to indicate the ON status of the device, suffix -E. Returning the rocker switch through the OFF position and back ON will reset the mechanism and restore the supply. Largely temperature-insensitive. Complies with CBE standard EN 60934 (IEC 60934).

Typical applications

Motors, transformers, solenoids, PCBs, hand-held machines, appliances, instrumentation.

Ordering information

Type No.
1410 snap-in panel mounting type

Mounting

F snap-in panel mounting

Size of frame

1 to fit mounting cut-out 28 x 12.7 mm (1.1 x .5 in)

Number of poles

1 single pole, thermally protected

Accessories

0 without accessories

Terminal design

P1 blade terminals 2.8-0.8 (QC .110/2x.110)silver-plated

Characteristic curve

F1 fast acting

Actuator style

W rocker, rounded profile

Actuator colour

02 white opaque

14 red translucent

15 orange translucent

19 green translucent

Actuator markings

Q I and O

Trip/ON illumination (optional)

B illuminated when tripped

E illuminated when ON

Illumination voltage range (optional)

2 20-28V marked 24V 35mA

3 90-140V marked 115V <1mA

4 185-275V marked 230V <1mA

Current ratings

0.63...10 A

1410 - F 1 1 0 -P1 F1 - W 14 Q E 3 - 2 A ordering example

The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.



1410-F1..

Technical data

Voltage rating	AC 240 V; DC 28 V (DC 50 V upon request) (UL: AC 250 V; DC 48)		
Current rating range	0.63...10 A		
Typical life circuit 1-3	30,000 operations for $I_N \leq 6.3$ A AC/DC 10,000 operations for $I_N > 6.3$ A AC 3,000 operations for $I_N > 6.3$ A DC 300 break operations at $2 \times I_N$		
Ambient temperature	-20...+70 °C (-4...+158 °F)		
Insulation co-ordination (IEC 60664 and 60664 A)	rated impulse withstand voltage 2.5 kV	pollution degree 2	reinforced insulation in operating area
Dielectric strength (IEC 60664 and 60664A) operating area	test voltage AC 3,000 V		
Insulation resistance	> 100 MΩ (DC 500 V)		
Interrupting capacity I_{cn}	0.63...2 A 2.5...8 A 10 A 3.15...10 A	12 x I_N 8 x I_N , AC max. 50 A 6 x I_N 10 x I_N , DC	
Interrupting capacity (UL 1077)	0.63...10 A 0.63...8 A 0.63...5 A	2,000 A AC 250 V 200 A DC 50 V 200 A DC 60 V	
Degree of protection (IEC 60529/DIN 40050)	operating area IP30 terminal area IP00		
Vibration	8 g (57-500 Hz) ± 0.61 mm (10-57 Hz), to IEC 60068-2-6, test Fc, 10 frequency cycles/axis		
Shock	20 g (11 ms) to IEC 60068-2-27, test Ea		
Corrosion	48 hours at 5 % salt mist, to IEC 60068-2-11, test Ka		
Humidity	96 hours at 95 % RH to IEC 60068-2-3, test Ca		
Mass	approx. 9 g		

Standard current ratings and typical internal resistance values


Current rating (A)	Internal resistance (Ω)	Current rating (A)	Internal resistance (Ω)
0.63	1.8	3.15	< 0.12
0.8	1.7	4	< 0.1
1	1.3	5	< 0.1
1.5	< 1	6.3	< 0.1
1.8	< 1	8	< 0.1
2	< 1	10	< 0.1
2.5	< 0.15		

Approvals


Authority	Voltage ratings	Current ratings
UL, CSA	AC 250 V DC 50 V DC 60 V	0.63...10 A 0.63...8 A 0.63...5 A
UL		

Dimensions

1410-F.....B.

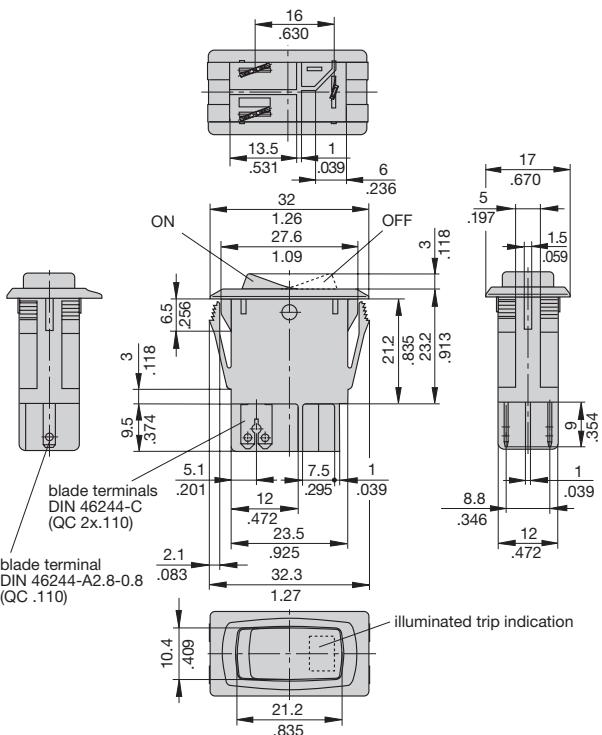


1410-F.....E.

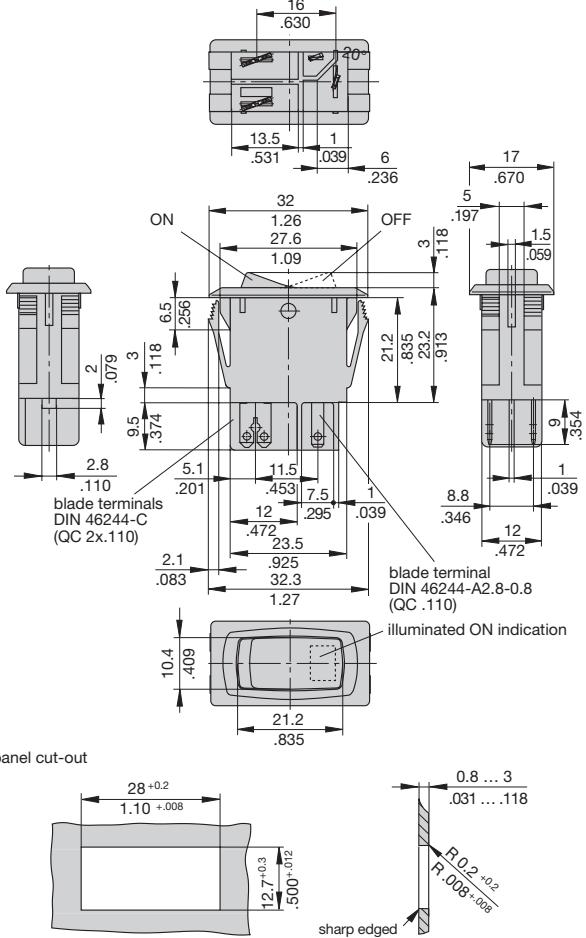


Internal connection diagrams


1410-F.....B.




1410-F.....E.



Typical time/current characteristics at +23 °C/+73.4 °F

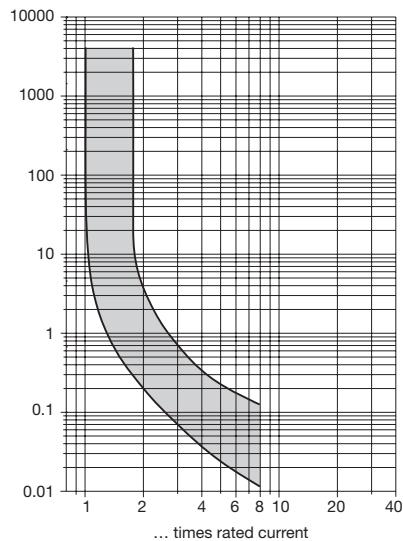

Installation drawing

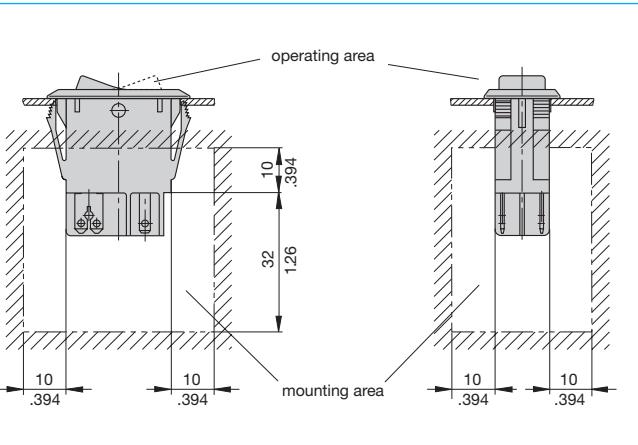

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.