

Type: 2-6400



Single pole thermal circuit breakers with push-to-reset, tease-free, trip-free, snap action mechanism (R type TO CBE to EN 60934). Featuring auxiliary contacts (1 x N/C; 1 x N/O) as standard. Options include an additional unprotected circuit tap (-A3). Approved to CBE standard EN 60934 (IEC 60934).

Voltage rating:

- AC 250 V
- DC 28 V

Current ratings:

from 0.05 A to 16 A

Number of poles:

single pole

Mounting method:

threadneck

Terminal design:

blade terminals
solder terminals

Actuation:

push button

Auxiliary contacts:

with auxiliary contacts

Water splash protection:

with water splash protection
without water splash protection

Illumination:

without illumination

Typical life:

5,000 operations at $2 \times I_N$, inductive


Interrupting capacity I_{cn} :

$10 \times I_N$


Approvals:

VDE, CSA, UL

Dimensions

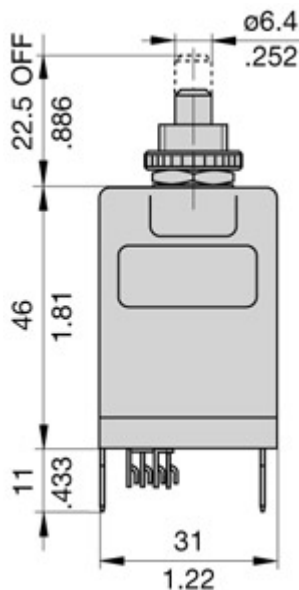

Internal connection diagrams



Description

Single pole thermal circuit breakers with push-to-reset, tease-free, trip-free, snap action mechanism (R type TO CBE to EN 60934; M-type when fitted with manual release features/type 2-6200 only). Featuring auxiliary contacts (1 x N/C; 1 x N/O) as standard. Options include manual release (type 2-6200 only), an additional unprotected circuit tap (-A3) and a centre reset position in which all contacts are open (-ZR: type 2-6200-H only). Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Motors, transformers, solenoids, controls for oil and gas boilers.


Ordering information

Type No.	
2-6200	flange mounting, with auxiliary contacts
2-6400	threadneck panel mounting, with auxiliary contacts mounting hardware bulk shipped
Mounting (type 2-6400 only)	
iG1	moulded threadneck 3/8-27UNS-2A
iG2	moulded threadneck M12x1
Terminal design - main circuit	
L10	solder terminals
P10	blade terminals A6.3-0.8 mm (QC .250)
Shunt terminal (optional)	
A3	shunt terminal same as main terminal (up to 7/5 A max. load; up to 16 A/10 A max. load)
Manual release (optional)	
H	manual release facility (type 2-6200 only)
Intermediate position (optional)	
ZR	intermediate position (type 2-6200-H only)
Auxiliary contacts (standard)	
Si	N/O and N/C contacts, solder terminals
Current ratings	
0.05...16 A	
2-6200 - .. - P10 - .. - .. - .. - Si - 8 A	ordering example

The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)	Current rating (A)	Internal resistance (Ω)
0.05	257	2	0.30
0.08	138	2.5	0.20
0.1	90	3	0.12
0.2	32.2	3.5	0.10
0.3	14.6	4	0.07
0.4	8.4	4.5	0.056
0.5	5.15	5	0.046
0.6	3.82	6	0.035
0.7	2.80	7	0.03
0.8	2.15	8	< 0.02
1	1.42	10	< 0.02
1.2	0.96	12	< 0.02
1.5	0.51	15	< 0.02
1.8	0.40	16	< 0.02

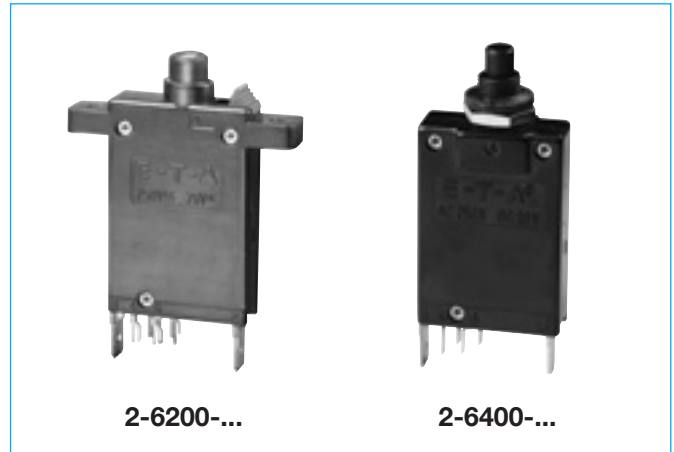

Technical data

For further details please see chapter: Technical Information


Voltage rating	AC 250 V; DC 28 V		
Current rating range	0.05...16 A		
Auxiliary circuit	1 A, AC 250 V/DC 28 V		
Typical life	AC 250 V / DC 28 V: 0.05...16 A 5,000 operations at 2 x I _N , inductive		
Ambient temperature	-20...+60 °C (-4...+140 °F)		
Insulation co-ordination (IEC 60664 and 60664A)	rated impulse withstand voltage 2.5 kV	pollution degree 2 reinforced insulation in operating area	
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area main circuit to aux. circuit aux. circuit 4-5 to 6-7	AC 3,000 V AC 1,500 V AC 840 V	
Insulation resistance	> 100 MΩ (DC 500 V)		
Interrupting capacity I _{cn}	10 x I _N		
Interrupting capacity (UL 1077)	I _N	U _N	
	0.05...4.5 A	AC 250 V	200 A
	5...7 A	AC 250 V	1,000 A
	8...15 A	AC 250 V	2,000 A
	16 A	AC 250 V	3,500 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP40 terminal area IP00		
Vibration	10 g (57-500 Hz) ± 0.76 mm (10-57 Hz), to IEC 60068-2-6, test Fc, 10 frequency cycles/axis		
Shock	40 g (11 ms) to IEC 60068-2-27, test Ea		
Corrosion	96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka		
Humidity	240 hours at 95 % RH to IEC 60068-2-3, test Ca		
Mass	approx. 25 g		

Approvals


Authority	Voltage ratings	Current ratings
VDE (EN 60934)	AC 250 V; DC 28 V	0.05...16 A
CSA/ UL	AC 250 V; DC 28 V	0.05...16 A

Internal connection diagrams


0.05 ... 7 A




8 ... 16 A



2-6200-...-ZR

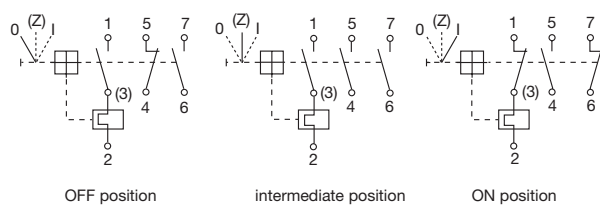

Typical time/current characteristics at +23 °C/+73.4 °F

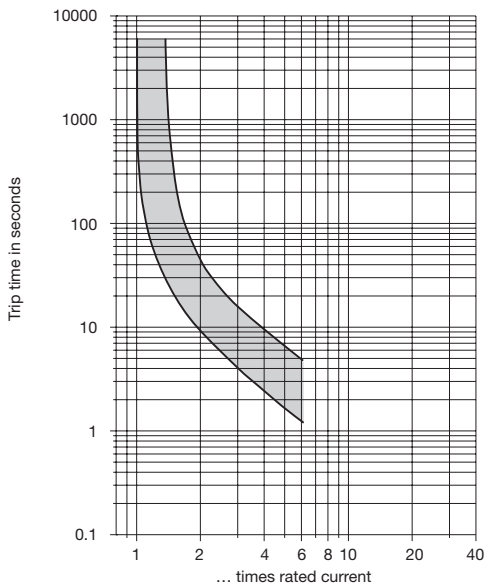


The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.


Ambient temperature °F	-4	+14	+32	+73.4	+104	+122	+140
°C	-20	-10	0	+23	+40	+50	+60
Derating factor	0.76	0.84	0.92	1	1.08	1.16	1.24

Dimensions

2-6200-...

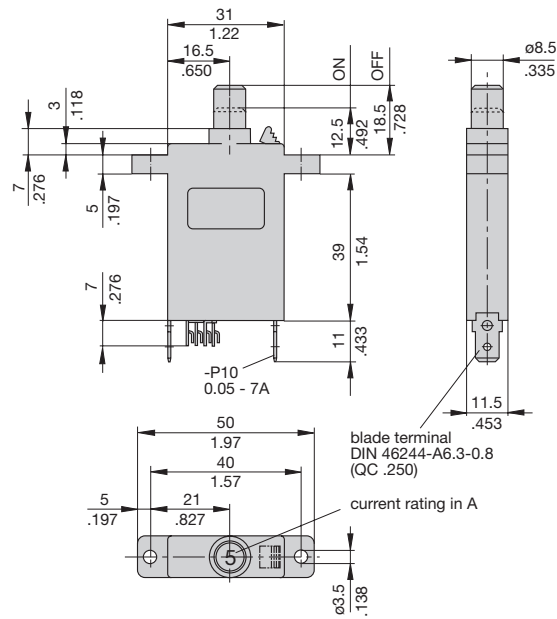


2-6400-...

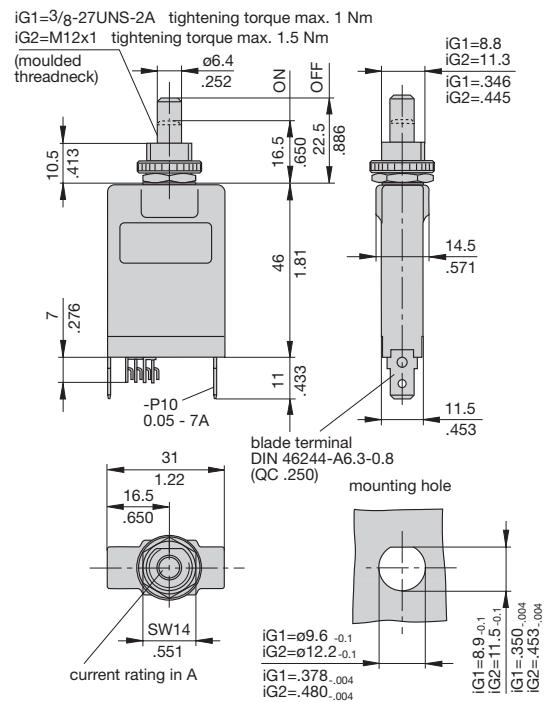


Installation drawings

2-6200-...

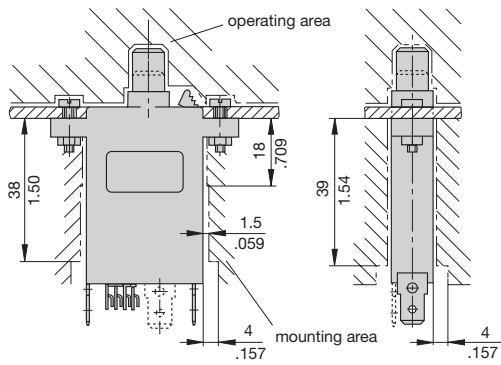

2-6400-...

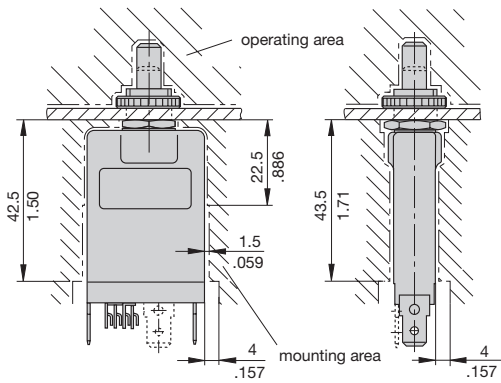


Terminal design


-P10 0.05...7 A

See dimension diagram.


-P10 8...16 A




-P10-A3 0.05...16 A



-L10 0.05...7 A



-L10 8...16 A



-L10-A3 0.05...16 A

