

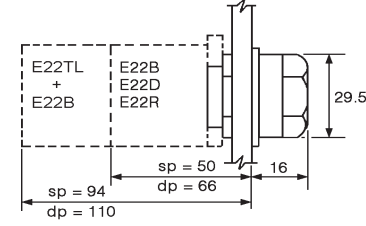


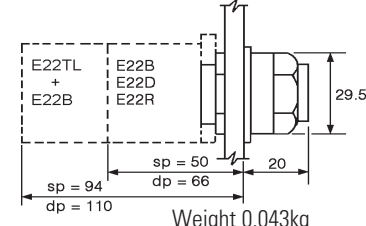


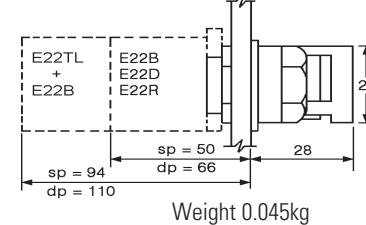




E22 Series - Operators suitable for illuminating and press to test light source units


Pushbutton operators suitable for illuminating *See notes 7, 9 & 11*

Chrome bezel	Black bezel	Lens colour	Catalogue numbers Chrome bezel	Black bezel	Overall dimensions (mm)
Flush button  25mm diameter push		Red	E22N2	E22NB2	 Weight 0.043kg
		Green	E22N3	E22NB3	
		Yellow	E22N4	E22NB4	
		White	E22N5	E22NB5	
		Blue	E22N6	E22NB6	
		Amber	E22N9	E22NB9	
		Clear	E22N0	E22NB0	
Extended button  25mm diameter push		Red	E22T2	E22TB2	 Weight 0.043kg
		Green	E22T3	E22TB3	
		Yellow	E22T4	E22TB4	
		White	E22T5	E22TB5	
		Blue	E22T6	E22TB6	
		Amber	E22T9	E22TB9	
		Clear	E22T0	E22TB0	
Full shroud  25mm diameter push		Red	E22TX2	—	 Weight 0.045kg
		Green	E22TX3	—	
		Yellow	E22TX4	—	
		White	E22TX5	—	
		Blue	E22TX6	—	
		Amber	E22TX9	—	
		Clear	E22TX0	—	






Double headed pushbutton operators *See note 6*

Description	Colour of operators	Marking	Ingress protection	Catalogue numbers Black bezel	Overall dimensions (mm)
2 Flush buttons & 1 pilot light with clear lens 	Green - Red	Unmarked	IP40 IP65	E22DB1A10 E22DB1B10	
	Green - Red	I O	IP40 IP65	E22DB1A20 E22DB1B20	

Assembled operators

Description	Colour of operators	Marking	Ingress protection	Contact block/light unit	Operator black bezel	Circuit diagram	Catalogue numbers Black bezel
2 Flush buttons & 1 pilot light with clear lens	Green	I	IP40	E22B2	E22DB1A20		E22DB1A20X1C
	Red	O	IP65	E22B1 E22D			E22DB1B20X1C

Press to test light source units *For use with illuminated operators*

Description	Supply voltage		Catalogue numbers	Overall dimensions (mm)
	50Hz	60Hz		
Transformer 6V filament bulb supplied 6V secondary 	110 240	120 220	E22TL1C E22TL2C	 Weight 0.106kg
Resistor unit 60V filament bulb supplied 	110/120V		E22R2C	 Weight 0.044kg
Direct voltage Filament bulb supplied 	12V 24V 50V		E22D12C E22D24C E22D50C	

Contact blocks

A light source unit ordered from the table alongside comes complete with 1N.O. & 1N.C. contact blocks. If the pushbutton is required to be used without a light source unit, select the contact blocks from page 4.

Press to test circuit diagram

