EC26T Series

- 32.768kHz watch crystal
- Miniature cylindrical package
- ±20ppm frequency tolerance
- 6.0pF or 12.5pF load capacitance available

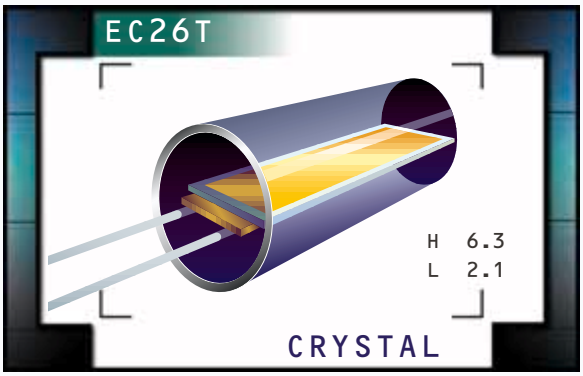

NOTES

ELECTRICAL SPECIFICATIONS

Frequency	32.768kHz
Frequency Tolerance (at 25°C)	±20ppm
Frequency Stability	-0.042ppm / $(\Delta°C)^2$ Maximum, Parabolic; Turn Over Temperature at 25°C ±5°C
Operating Temperature Range	-10°C to 60°C
Aging (at 25°C)	±3ppm / year Maximum
Storage Temperature Range	-20°C to 70°C
Shunt Capacitance	0.85pF Typical, 2pF Maximum
Motional Capacitance	2.0fF Typical
Drive Level	1 µWatt Maximum
Equivalent Series Resistance	50,000 Ohms Maximum
Insulation Resistance	100 Megaohms Minimum at $100V_{DC}$
Load Capacitance (C_L)	6.0pF or 12.5pF

MANUFACTURER	CATEGORY	SERIES	PACKAGE	CLASS	REV. DATE
ECLIPTEK CORP.	CRYSTAL	EC26T	CYLINDRICAL	CR17	06/00

PART NUMBERING GUIDE

EC26T 1

LOAD CAPACITANCE
Blank=6.0pF
1=12.5pF

NOTES

MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

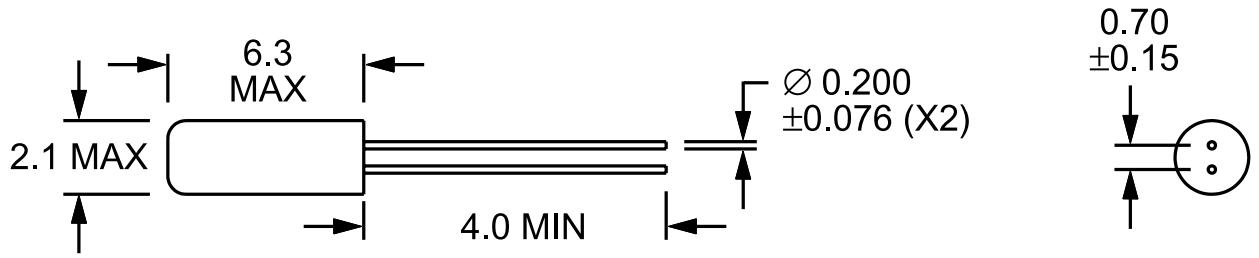

PARABOLIC TEMPERATURE CURVE

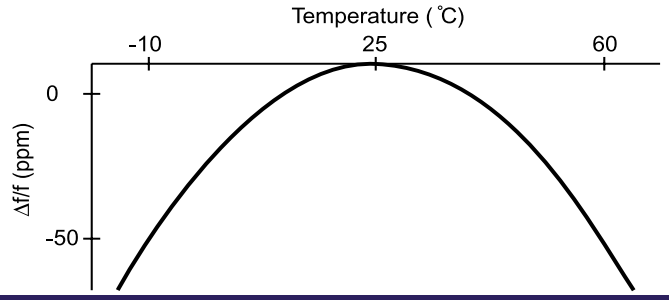

MARKING SPECIFICATIONS

Line 1: 32768

Note: EC26T1 parts will not be marked.

MANUFACTURER	CATEGORY	SERIES	PACKAGE	CLASS	REV. DATE
ECLIPTEK CORP.	CRYSTAL	EC26T	CYLINDRICAL	CR17	06/00