

## Product Detail



<b>Product Line:</b>	<a href="#">Johnson</a> (Click for customer service)
<b>Part Number:</b>	105-0851-001
<b>Description:</b>	Vertical Test Jack -Insulated Machined Contact
<b>Product Family:</b>	TEST JACK
<b>Body Material:</b>	Nylon 6/6 per ASTM D4066
<b>Breakdown Voltage:</b>	3500 Vrms min.
<b>Color / Finish:</b>	White
<b>Contact Material:</b>	Beryllium copper
<b>Contact Finish:</b>	Silver
<b>Contact Termination:</b>	Solder
<b>Current:</b>	5 amps
<b>Description:</b>	Insulated Machined Contact
<b>For Use With:</b>	.080 (2.00) Tip Plug
<b>RoHS Compliant:</b>	Yes

20070523-1523

# Vertical Test Jacks

Application • Test Points

## Insulated: Machined Contact

### SPECIFICATIONS:

**Contact:** Beryllium copper per QQ-C-530

**Finish:** Silver

**Body:** Nylon 6/6 per ASTM D4066

### RATINGS

**Current:** 5 amps

**Breakdown Voltage:** 3500 Vrms minimum +



**Contact Resistance:** 0.010 ohms maximum

**Adjacent Jack C:** 1 pF maximum at 1 MHz

**For Standard Tip Plug: .080 (2.00) Diameter**

### FEATURES:

- Contact protected from flux and solder
- Nylon UL approved for self extinguishing

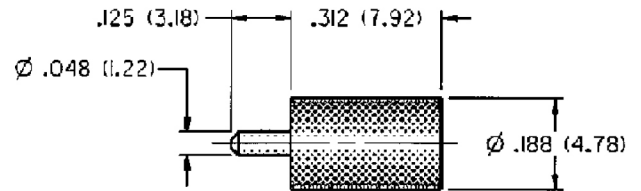

MOUNTING HOLE LAYOUT

### SILVER PLATING

PART NO.	COLOR
105-0851-001	White