EMERSON TM Network Power		Connectivity Solutions					
Wireless		CATV Au		& Video	Networking & Structured Wiring	Military & Aerospace	e Test & Measurement
Home Member Access Products Connectors		Product Detail					
Microwave Components CATV Components Coaxial Cable Assemblies Structured Cabling & Conn Tools & Accessories	nectors	Product Lin Part Numb Description Product Fa Body Mate	per: n: mily:	Johnson (Click for customer service) 108-1763-101 Banana Plug - Insulated Hex Body Solder Stud BANANA PLUG Brass per QQ-B-626D			
Customer Service Request For Quote Representatives Distributors Literature/Catalog Red What's New About Our Brands Legal Terms	quest	Breakdown Voltage: Color / Fin Contact Fin Contact Terminatio Current: Desc 2: Descriptio	nish: nish: on:	3500 Vrms min. Black Nickel Solder 15 amps Solder Stud Insulated Hex Body			
© 2007 All Rights Rese	erved	For Use W RoHS Com		.166 (4.23) Yes	Banana Jack		

20070523-1523

Banana Plug -Insulated Hex Body Solder Stud







Plug Body: Brass per QQ-B-626D Plug Spring: Nickel silver per QQ-C-585 Finish: Nickel Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps Breakdown Voltage: 3500 Vrms minimum + Contact Resistance: 0.010 ohms maximum

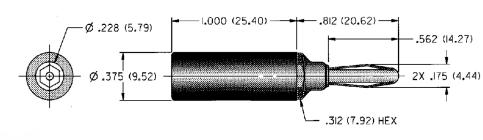





For Standard Banana Jack: .166 (4.23) Diameter FEATURES:

- Wire can be soldered to threaded stud or flared and held by stud for solderless connection
- Solder stud accepts up to 16 gauge wire
- Nylon UL approved for self extinguishing