


D-SUB HOODS



NETWORK SOLUTIONS

- Aim Electronics offers a wide variety of colors and styles for all D-sub connectivity needs.
- Available in plastic, metalized plastic, and heavy duty metal.
- Strain relief grommets are available in 3 sizes 9, 15 and 25, to correctly match the proper D-sub size.
- All hoods are available in 25 piece bulk bags or quantities of 6 per box for blister pack.
- To make a part number packaged simply add a "P" to the end of the part number.

D-SUB HOODS PLASTIC, METALIZED, HEAVY METAL

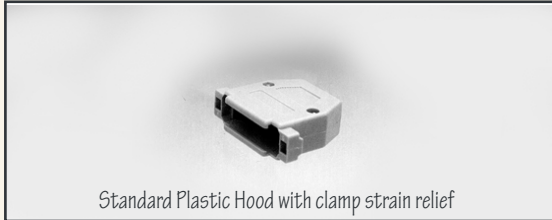

Standard Plastic Hood with clamp strain relief

Aim #	Description
40-9709H	9 pin hood
40-9715H	15 pin hood
40-9725H	25 pin hood
40-9737H	37 pin hood
40-9750H	50 pin hood
40-9709HG	9 pin hood with grommets
40-9715HG	15 pin hood with grommets
40-9725HG	25 pin hood with grommets
40-9737HG	37 pin hood with grommets
40-9750HG	50 pin hood with grommets



Plastic hood with screw strain relief

Aim #	Description
40-9709HX	9 pin hood
40-9715HX	15 pin hood
40-9725HX	25 pin hood



Heavy metal EMI/RFI hood


Aim #	Description
40-9709HM	9 pin hood
40-9715HM	15 pin hood
40-9725HM	25 pin hood
40-9709HMG	9 pin hood with grommets
40-9715HMG	15 pin hood with grommets
40-9725HMG	25 pin hood with grommets



Metalized Plastic Hood with clamp strain relief

Aim #	Description
40-9709HS	9 pin hood
40-9715HS	15 pin hood
40-9725HS	25 pin hood
40-9709HSG	9 pin hood w/ grommets
40-9715HSG	15 pin hood w/ grommets
40-9725HSG	25 pin hood w/ grommets

Aim #	Description
40-9325G	25 pin hood with grommets
40-9309G	9 pin hood with grommets
40-9315G	15 pin hood with grommets

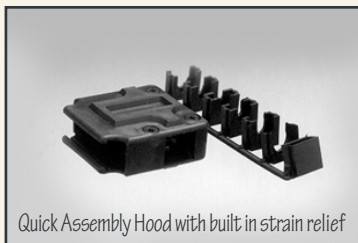

Quick Assembly Hood with built in strain relief

Aim #	Description
40-9709HQ	9 pin hood
40-9715HQ	15 pin hood
40-9725HQ	25 pin hood

See page 62 for available hardware

FYI

*for the packaged version of any hood on this page simply add a "P" to the end of the part number.


D-SUBMINIATURE SOLUTIONS



NETWORK SOLUTIONS

D-SUB CONNECTORS

- Aim electronics offers a high performance low cost D-subminiature connector with two different plating options available and either solder or crimp contacts.
- All Aim D-subminiature connectors incorporate a thermoplastic insulator UL94/V-0 flame retardant rated.
- Contacts are Copper or tin alloy with gold plating on Nickel. All male connectors are pressfit style with grounding indents to assure connection every time.

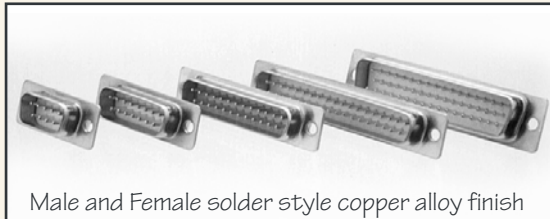

Male and Female solder style copper alloy finish

Aim #	Description
40-9709M	9 pin male
40-9715M	15 pin male
40-9725M	25 pin male
40-9737M	37 pin male
40-9750M	50 pin male
40-9709S	9 pin female
40-9715S	15 pin female
40-9725S	25 pin female
40-9737S	37 pin female
40-9750S	50 pin female



Male and Female Tin plated solder style

Aim #	Description
40-9509M	9 pin male
40-9515M	15 pin male
40-9525M	25 pin male
40-9509S	9 pin female
40-9515S	15 pin female
40-9525S	25 pin female



Male and Female Crimp type copper alloy finish

Aim #	Description
40-9809M	9 pin male
40-9815M	15 pin male
40-9825M	25 pin male
40-9809S	9 pin female
40-9815S	15 pin female
40-9825S	25 pin female



Male and Female Crimp type Tin plated

Aim #	Description
40-9909M	9 pin male
40-9915M	15 pin male
40-9925M	25 pin male
40-9909S	9 pin female
40-9915S	15 pin female
40-9925S	25 pin female

FYI

*for the package version of any connector on this page simply add a "P" to the end of the part number.

D-SUB CONNECTORS TIN & COPPER ALLOY FINISH


D-SUBMINIATURE SOLUTIONS

D-SUB HARDWARE




NETWORK SOLUTIONS

- Aim offers a complete line of D-sub hardware.
- All hardware on this page is Brass Body with Nickel Plating.
- For the package version of any item on this page simply add a "P" to the end of the part number.

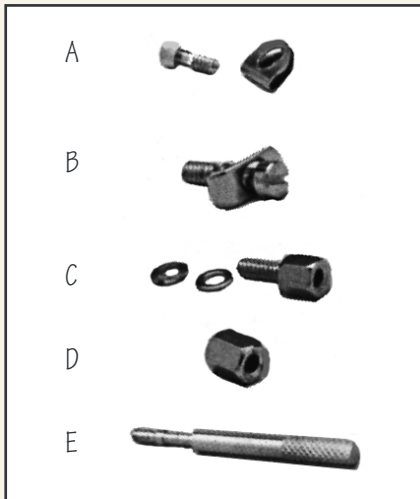

	Aim #	Description
A	40-98440M	Male screw retainer (1SET)
	40-98440M-C	Male screw retainer (100)
B	40-98441M	Male screw retainer (1SET)
	40-98441M-C	Male screw retainer (100)
C	40-98440F	Female screw retainer .300 thread (1SET)
	40-98440F-C	Female screw retainer .300 thread (100)
	40-98440F	Female screw retainer .500 thread (1SET)
	40-98440F-C	Female screw retainer .500 thread (100)
D	40-98443N	Hex stand off (1SET)
	40-98440F-C	Hex stand off (100)
E	40-9844T	Thumb screw (1SET)
	40-9844T-C	Thumb screw (100)


D-SUB HARDWARE




40-9865 Insertion Extraction tool for standard D-sub pins



40-9427T Insertion Extraction tool for High Density pins



Aim #	Description
40-9856M	D-sub pins (100)
40-9856MK	D-sub pins (5,000)
5,000 piece on tape and reel	
40-9866S	D-sub female pins (100)
40-9866SK	D-sub female pins (5,000)



Aim #	Description
40-9428M	male high density pins (100)
40-9428F	female high density pins (100)



40-9215EH Locking Post kit (1 Set)



40-9215EL Slide Locking kit (1 Set)

D-SUBMINIATURE SOLUTIONS