


Current Batteries


Datasheet	Picture	Size	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
763		Multi Cell	22.5	710	N/A	N/A	372	77.8	92.1	51.6

EVEREADY 763



Industry Standard Dimensions

mm (inches)

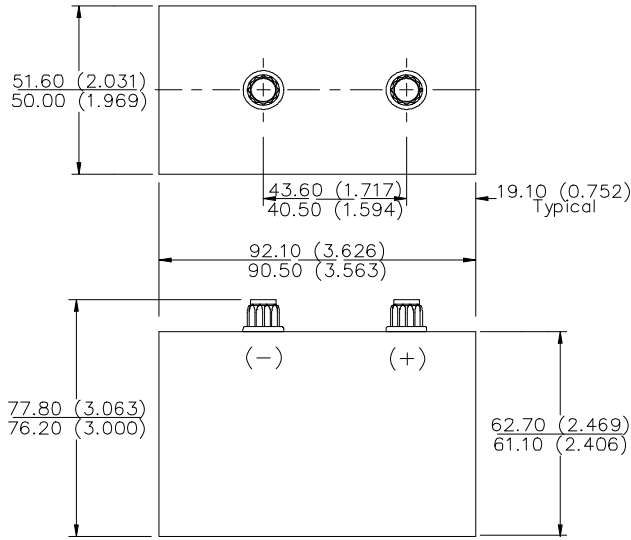

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-710

Battery Voltage: 22.5 Volts

Average Weight: 372 grams (13.2 oz.)

Volume: 311 cubic centimeters (19.0 cubic inch)

Average Capacity: 1,700 mAh to 0.8 volts/cell
(Rated at 25 mA continuous drain at 21°C)


Cells: Forty Five No. 130

Three parallel strings of fifteen in series

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

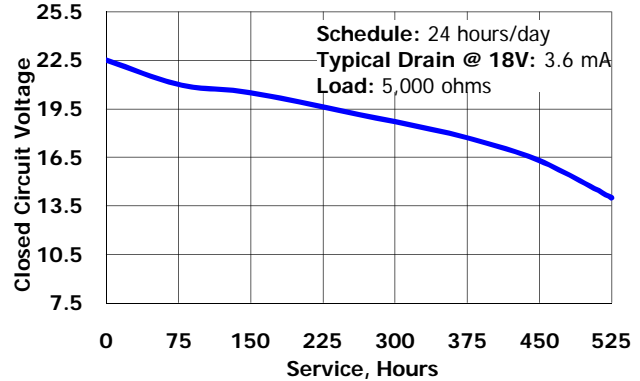

Simulated Application Test

Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 18V (milliamperes)	Load (ohms)	Cutoff Voltage					
			12V	13.5V	15V	16.5V	18V	19.5V
24 hours/day	3.6	5,000	491	435	347	227		
4 hours/day	14.4	1,250	135	125	112	92	75	46

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved