

Model CLSM-2000

Closed Loop Hall Effect

Description

The Model CLSM-2000 is a closed loop Hall effect current sensor that accurately measures DC and AC currents and provides electrical isolation between the current carrying conductor and the output of the sensor.

Features

- Noncontact measurement of high current
- Measures DC, AC and impulse currents
- Very fast response and high accuracy
- High overload capacity

Applications

- Variable speed drives for motors
- Welding Equipment
- Power supply Equipment
- Measure and control system
- Over current protection
- Protection of power semiconductors



Electrical Specifications

CLSM-2000

Nominal current (I_N) ± 2000 A
Current range 0 to ± 2500 A
Nominal output current (I_M) 400 mA
Turns Ratio 5000 / 1
Measuring Resistance (R_M) 0 to 10Ω
Overall accuracy at 25°C $\pm 0.5\%$ of I_N
Supply voltage (Vdc) ± 15 to ± 24
Current consumption 20 mA + output current

Accuracy-Dynamic Performance

Zero current offset at 25°C $< \pm 0.6$ mA
Offset current temperature drift (-25°C to $+85^\circ\text{C}$) $< \pm 0.3$ mA
Linearity better than $\pm 0.1\%$
Response time better than $1\mu\text{s}$
di / dt better than $50\text{A}/\mu\text{s}$
Frequency range DC to 100KHz (-3dB)

General Information

Operating temperature..... -25°C to $+85^\circ\text{C}$
Storage temperature -40°C to $+100^\circ\text{C}$
Package flame retardant plastic case, UL94V-0
Isolation voltage 10kV/50Hz/1min.
Output reference..... To obtain a positive output on terminal M, input current must flow in the direction of the arrow (conventional flow)
Weight 892 grams
Mounting Panel mount via 4 holes, 6mm dia.
Aperture size 1.57" (40 mm)
Output connection 3 Faston Terminals

Notes:

1. Busbar temperature should not exceed 100°C .
2. The dynamic performance is the best when the busbar fills the aperture.




Mechanical Dimensions

All dimensions are in inches (millimeters)

Model CLSM-2000

Mechanical Dimensions

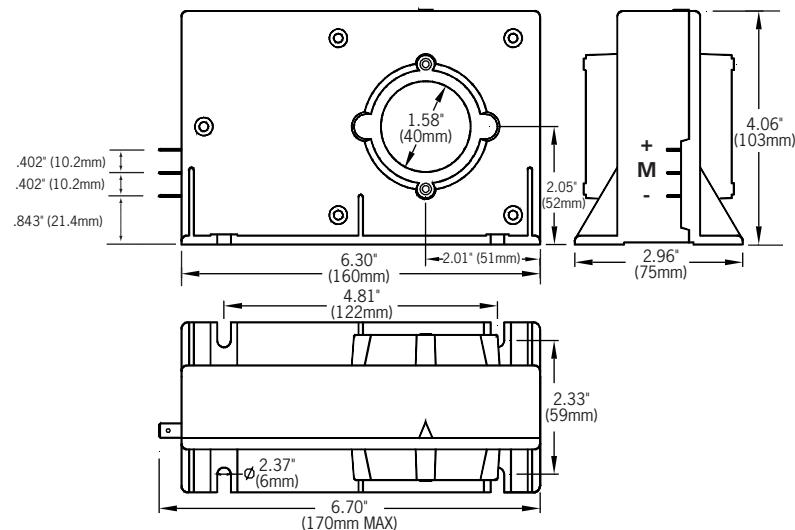

Connection Schematic

