

[semiconductors](#)

[company](#)

[product](#)

[sales network](#)

[site index](#)

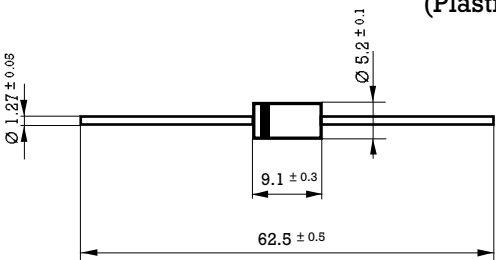

[contact us](#)

semiconductors :: product :: [General Purpose Rectifiers](#)

### **Product:** General Purpose Rectifiers

Product	Family	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$V_{RRM}$ (V)	$V_F$ (V)	OUTLINE
<a href="#">GP30G</a>	GP30	3.0	125	400	1.1	DO201-AD

### 3 Amp. Glass Passivated Junction Rectifier

<p>Dimensions in mm.</p> <p style="text-align: right;">DO-201 AD (Plastic)</p>  <p><b>Mounting instructions</b></p> <ol style="list-style-type: none"> <li>1. Min. distance from body to soldering point, 4 mm.</li> <li>2. Max. solder temperature, 350 °C.</li> <li>3. Max. soldering time, 3.5 sec.</li> <li>4. Do not bend lead at a point closer than 3 mm. to the body.</li> </ol>	<p><b>Voltage</b> 50 to 1200 V.</p> <p><b>Current</b> 3.0 A. at 55 °C.</p> 
	<ul style="list-style-type: none"> <li>• Glass passivated junction</li> <li>• High current capability</li> <li>• The plastic material carries U/L recognition 94 V-0</li> <li>• Terminals: Axial Leads</li> <li>• Polarity: Color band denotes cathode</li> </ul>

#### Maximum Ratings, according to IEC publication No. 134

		GP30A	GP30B	GP30D	GP30G	GP30J	GP30K	GP30M	GP30Q
$V_{RRM}$	Peak recurrent reverse voltage (V)	50	100	200	400	600	800	1000	1200
$I_{F(AV)}$	Forward current at $T_{amb} = 55\text{ °C}$	3 A							
$I_{FRM}$	Recurrent peak forward current	30 A							
$I_{FSM}$	8.3 ms. peak forward surge current (Jedec Method)	125 A							
$T_j$	Operating temperature range	- 65 to + 175 °C							
$T_{stg}$	Storage temperature range	- 65 to + 175 °C							
$E_{RSM}$	Maximum non repetitive peak reverse avalanche energy. $I_R = 1\text{ A}$ ; $T_j = 25\text{ °C}$	20 mJ							

#### Electrical Characteristics at $T_{amb} = 25\text{ °C}$

$V_F$	Max. forward voltage drop at $I_F = 3\text{ A}$	1.1 V
$I_R$	Max. reverse current at $V_{RRM}$ at 25 °C at 150 °C	5 $\mu\text{ A}$ 300 $\mu\text{ A}$
$R_{thj-a}$	Thermal resistance ( $I = 10\text{ mm.}$ ) Max. Typ.	30 °C/W 15 °C/W