


## 2mm Test

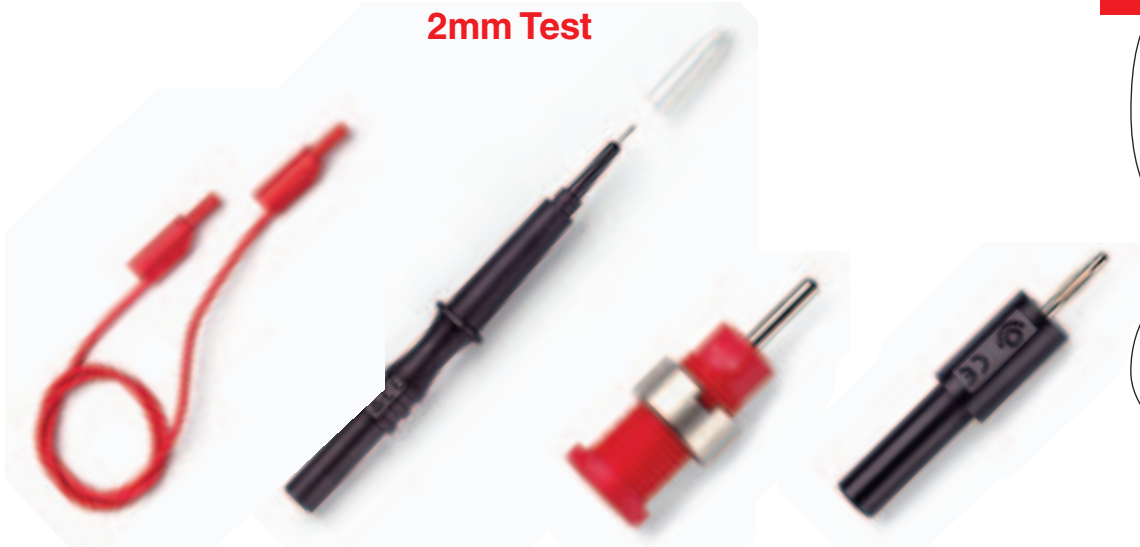

### Multi-stacking 2mm Safety Sheathed Patch Cords

Model# 72920-39-2

- Thin profile, highly flexible leads allow fine control and minimal strain on circuit board measurements.
- Multi-stacking safety sheathed design for easy multiple connections to test points.

*Shown on page 77.*

### SMD Test Probe with Sharp, Spring-Mounted Tip

Model# 72923-2

- Provides ultra-fine control for probing high density SMD circuits.
- Very fine 0.03in (0.7mm) diameter stainless steel tip is spring-mounted for controlled pressure.
- Removable, clear IC insulator cap prevents shorting of adjacent IC pins.

*Shown on page 77.*

### 2mm Safety Sheathed Jacks

Model# 72921-0

- 2mm sizing for convenient connection in tight spaces.
- Safety sheathed jack with 1.9mm wire wrap connecting pin for quick attachment.

*Shown on page 75.*

### 4mm Safety Banana Jack to 2mm Banana Plug Adapter

Model# 72914-02

- For easy conversion from 4mm test leads to more compact 2mm test accessories.
- Accepts 4mm safety-sheathed banana plugs.

*Shown on page 78.*

## AC Voltage Detector and Flashlight





### LumaVolt Model# 7290

- AC Voltage Detector – Detects voltages from 40 Vac to 300 Vac from 1 to 15 inches away from the source.
- Flashlight feature includes ultra-bright white LED with 100,000 hour bulb.

*Shown on page 65.*

## Precision Electronic Test Probe Set

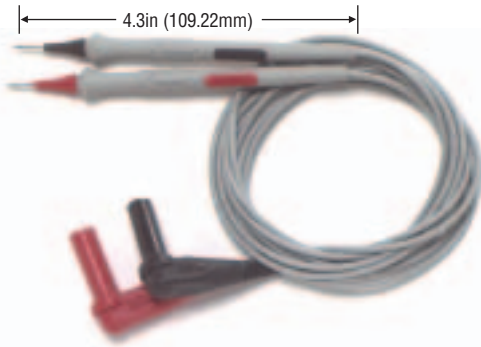

Model#	Features	Ratings
6341	Probe set with complete set of 5 tips	IEC1010 CAT III 1000V*
6342	Probe set with sharp point gold pogo pin tips	CAT III 1000V
6275	Probe set with sharp stainless steel rigid tips	CAT III 1000V
6354	Replacement probe tips. Set of 5 types.	

- Replaceable 0.04in (1.52mm) pogo-pin tips.
- Small outline for tight test situations.
- Replaceable pogo-pin tips.
- Comfort-grip textured surface.
- Fits all meters including Fluke, HP (Agilent), Keithley, Meterman and others.
- Silicone insulated leads resist abrasion and heat.

### Replacement Tips

1. Sharp-point gold pogo-pin.
2. Tri-point gold pogo-pin.
3. Quad-point gold pogo-pin.
4. Sharp stainless steel rigid.
5. 5.3in (134.6mm) long extended. Stainless steel.

\*except when used with 3in (76.2mm) tip which is 33Vrms/70Vdc.

See page 64 for more probe tips.

## Safety 2mm/4mm Test Probe Set



Model#	Ratings
6601	IEC1010 1000V CAT III

- Versatile 2mm probe tip with screw-on 4mm tip.
- Each probe includes Protective Cap designed to meet Guidance Note GS38.
- Silicon insulated 4ft (1.2m) test leads with right-angle DMM plugs.
- Comfort-grip textured surface.

## Retractable Needle Tip Test Probes



Model#	Plug Type	Ratings
5953A	Right-angle DMM	CAT II 600V*
5952A	Stacking banana	600V**

\*per IEC1010

- Silicone insulated 4ft (1.2m) leads fits most meters from Fluke, Meterman, HP, Amprobe, Greenlee and others.
- Fully insulated tip extends to 3in (76.2mm).
- Durable 0.040in (1.02mm) stainless-steel needle tips reach into inaccessible areas.
- Set of 2 probes, one black and one red.

See page 63 for banana plug types.

\*\*Ratings: Hands free testing in controlled environments: 600 Vrms Max. For CE compliance: not intended for hand held use at voltages above 33 Vrms/70 Vdc.

## Test Probes with Screw-on Alligator Clips



Model#	Ratings
6723	IEC1010 1000V CAT III 20A (probe alone) IEC1010 300V, CAT II 10A (with alligator clip attached) 10A

- Probe set includes 2 screw-on alligator clips.
- 8-32 threaded tips allow secure attachment of alligator clips.
- Silicon insulated 4ft (1.2m) test leads with right-angle DMM plugs.
- Comfort-grip textured surface.
- Wide temperature range of 14 to 131°F (-10 to +55°C).

## AC Voltage Detector and Flashlight



Model#
7290

AC Voltage Detector – Detects voltages from 40VAC to 300VAC from 1 to 15 inches away from the source. Flashlight feature includes ultra-bright white LED with 100,000 hour bulb. Offers long battery life with standard alkaline AAA battery. No lithium battery needed.

## Additional Screw-on Alligator Clip Set for 6723



Model#	Ratings
6726	300V, CAT II 10A

- Set of 2 screw-on alligator clips.
- Designed for use with 8-32-UNC 2A threaded probe like the Pomona 6723.
- 8-32 threaded tips allow secure attachment of alligator clips.
- Wide temperature range of 14 to 131°F (-10 to +55°C).